Submit to:
Nevada Division of Water Resources
901 South Stewart Street, Suite 2002
Carson City, NV 89701

REPORT OF INSTALLATION OF TOTALIZING METER

Permit No(s).: 25866 and 82161 (one form per meter) Well Log No.: 1906

In accordance with State Engineer's requirement for the installation and maintenance of a totalizing meter, the following information is being submitted as notice that the required totalizing meter has been properly installed:

The meter is located at Assessor's Parcel Number (APN) 005-240-13 County: Eureka

OR in the SW Quarter of the SW Quarter of Section 33

Township 30 N./S., Range 48 E., M.D.B.&M., Eureka County, Nevada.
circle one

---

1. Meter Serial No.: Not Legible Date Installed: January 1, 2012 (month day year)
2. Manufacturer of Meter: McCrometer
3. Meter Model No.: 90-4-1612
4. Meter Size: 4 Inch
5. Meter Units: ☑ Gallons ☐ Acre-feet ☐ Cubic Feet ☐ Other:
6. Multiplier Factor: ☑ None ☐ x1000 ☐ x100 ☐ x10 ☐ x.01 ☐ x.001 ☐ Other:
7. Meter Reading on Date Installed: 0
8. This meter is ☐ Existing ☐ New ☑ Replacement

◆ If this is a replacement meter, answer items 9 and 10 for the old meter.

9. Retired Meter Serial No.: Unknown-no record Date Removed: Unknown-no record (month day year)
10. Meter Reading on Date Removed: Unknown-no record

Additional Notes (e.g., which gauge should be read for electronic meters, instructions for access to meter):

Meter is located inside the 15'x30' metal garage.

RECEIVED
2015 NOV 13 PM 3:22
STATE ENGINEERS OFFICE

Please Print or Type

☐ Owner ☐ Tenant ☑ Agent Name: Ronald Damele- Agent for Eureka County

Address: Post Office Box 714 Telephone: 775-237-5372

City, State, ZIP + 4: Eureka, Nevada 89316-0714 Email Address: rdamele@eurekanv.org

Signature: RDDamele Date: November 9, 2015

Contact for meter access: Ronald Damele Contact's Telephone: 775-237-5372

WELL LOG AND REPORT TO THE STATE ENGINEER OF NEVADA

Log No. 1906
Rec. May 12 1952
Well No. 13
Permit No. 13435
Do not fill in

Owner: H. J. Buchanan
Driller: Carruthers Drilling Service
Address: Madera, Calif
Address: Beowawe, Nev
Lic. No. 116

Location of well: S.W. 1/4 SW 1/4 Sec 33, T. 30N/S, R40 E, in Eureka County

or

Water will be used for: Irrigation
Total depth of well: 300

Size of drilled hole: 14"
Weight of casing per linear foot: 28 Lbs

Thickness of casing: 3/16
Temp. of water: Cool

Diameter and length of casing: 4" long x 14 3/8 O.D.
(Casing 12" in diameter and under give inside diameter; casing 12" in diameter give outside diameter.)

If flowing well give flow in c.f.s. or g.p.m. and pressure:

If nonflowing well give depth of standing water from surface: 57'

If flowing well describe control works:
(Type and size of valve, etc.)

Date of commencement of well: 1-10-52
Date of completion of well: 4-23-52

Type of well rig: Cable Tools

LOG OF FORMATIONS

From feet	To feet	Thickness feet	Type of material
0	1	1	Surface
1	2	1	Gravel
2	4	2	Clay
4	30	26	Clay & Cobbles
30	32	2	Hard Sand
32	48	16	Clay & Cobbles
48	60	12	Sandy Clay & Gravel
60	67	7	Clay
67	78	11	Gravel & Sand (Water)
78	84	6	Clay
84	96	12	Sandy Clay
96	104	8	Sticky Clay
104	112	8	Sand & Gravel (Water)
112	146	34	Strike of Sandy Clay & Sand
146	150	4	Gravel (Water)
150	160	10	Sandy Clay
160	164	4	Gravel
164	188	24	Sandy Clay & Cobbles
188	204	16	Hard Sand (Water)
204	232	28	Sandy Clay & Sand

(OVER)

Water-bearing Formation, Casing Perforations, Etc.

Chief aquifer (water-bearing formation)

from 237 to 253 ft.

Other aquifers 67 to 78 +
104 to 112 + 146 to 157 +
160 to 164 + 188 to 204 +
232 to 235 + 260 to 263 +
274 to 280

First water at 70 feet.

Casing perforated

from 70 to 295 ft.

Size of perforations

3/8 x 2½"

RECEIVED
NOV 13 PM 3:22
STATE ENGINEERS OFFICE

LOG OF FORMATIONS—*Continued*

From feet	To feet	Thickness	Type of material
232	235	3	Gravel (Water)
235	237	2	Sticky Clay
237	253	16	Hard Sand & Gravel (Water)
253	260	7	Sandy Clay
260	263	3	Gravel
263	274	11	Sticky Clay
274	280	6	Sand & Gravel (Water)
280	287	7	Sandy Clay
287	295	8	Hard Sand
295	300	5	Sticky Clay

CASING RECORD

Diam. casing	From feet	To feet	Length	"Remarks"—Seals, Grouting, Etc.
14	Surface	300	300	Landed at Sticky Clay at 300 Ft

GENERAL INFORMATION—Pumping Test, Quality of Water, Etc.

Pump Test To Be Made At A Later Date.

WELL DRILLERS STATEMENT

This well was drilled under my jurisdiction and the above information is true to my best information and belief.

Signed Carruthers Drilling Service
Well Driller

By

License No. 116

Dated May 8th, 19 52

OFFICE STATE ENGINEER MAY 12 52

(Not to be filled in by Driller)

RECEIVED 2015 NOV 18 PM 3:22 STATE ENGINEERS OFFICE

RECEIVED
2015 NOV 13 PM 3:22
STATE ENGINEERS OFFICE

RECEIVED
2015 NOV 13 PM 3: 22
STATE ENGINEERS OFFICE

Sec. 33 - T30N, R48E

05-24

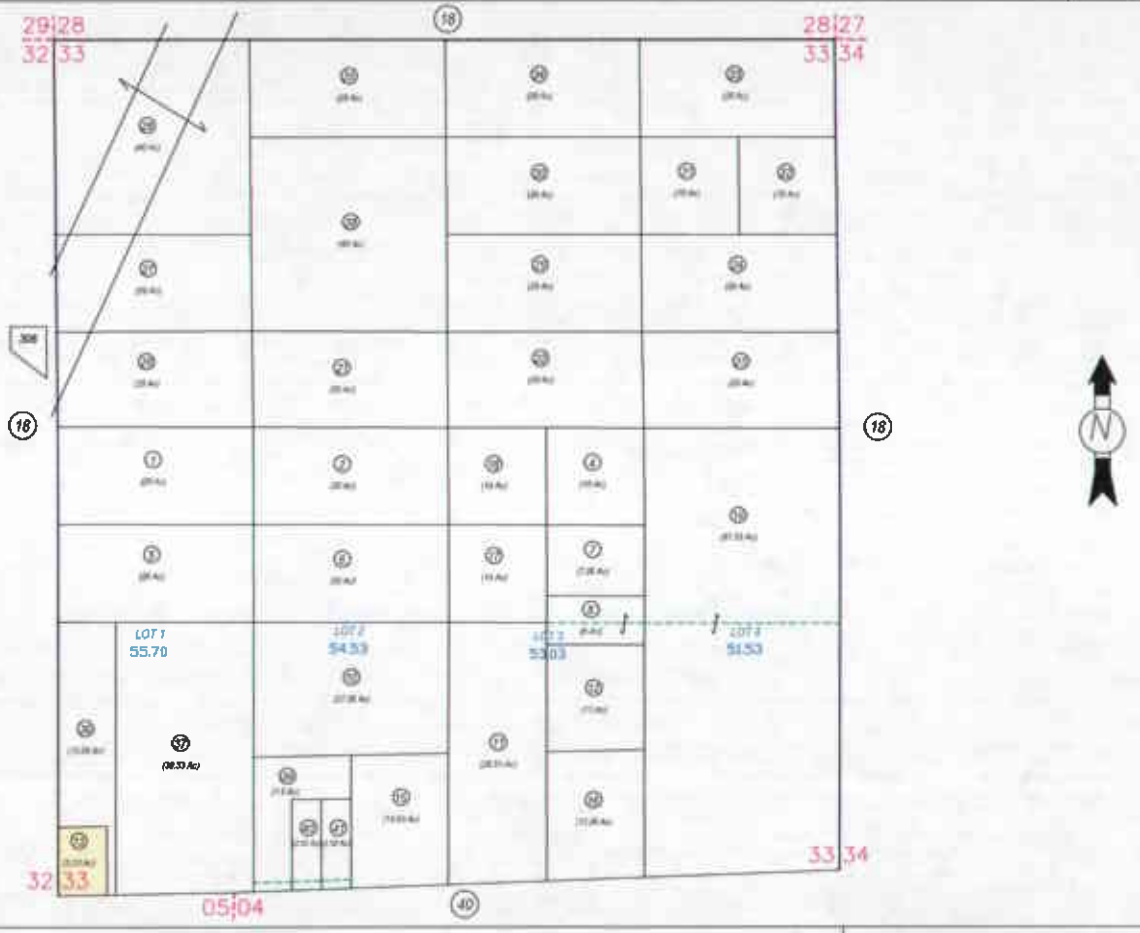

EUREKA COUNTY

RECEIVED
2015 NOV 13 PM 3:22
STATE ENGINEERS OFFICE

APN#005-240-13

Print Date: 11/09/2015
Image Date:10/28/2014
Level: Neighborhood