

Submit to:  
Nevada Division of Water Resources  
901 South Stewart Street, Suite 2002  
Carson City, NV 89701

# REPORT OF INSTALLATION OF TOTALIZING METER

Permit No(s): 70084 (one form per meter) Well Log No.: 74753

In accordance with State Engineer's requirement for the installation and maintenance of a totalizing meter, the following information is being submitted as notice that the required totalizing meter has been properly installed:

The meter is located at Assessor's Parcel Number (APN) 3537-10-177-008 County: Humboldt  
OR in the 5 1/2 NW Sec 10-35N Quarter of the \_\_\_\_\_ Quarter of Section 10  
Township 35N N./S., Range 37E E., M.D.B.&M., Humboldt County, Nevada.  
circle one

- Meter Serial No.: 14-18030 Date Installed: 5 month 18 day 15 year
  - Manufacturer of Meter: MR Crometer
  - Meter Model No.: MT100
  - Meter Size: 2"
  - Meter Units:  Gallons  Acre-feet  Cubic Feet  Other: \_\_\_\_\_
  - Multiplier Factor:  None  x1000  x100  x10  x.01  x.001  Other: \_\_\_\_\_
  - Meter Reading on Date Installed: 0
  - This meter is  Existing  New  Replacement.
- If this is a replacement meter, answer items 9 and 10 for the old meter.
- Retired Meter Serial No.: TB-200AT-GPM Date Removed: Spring (2015) month day year
  - Meter Reading on Date Removed: 0

Additional Notes (e.g., which gauge should be read for electronic meters, instructions for access to meter):

5540W Rose Creek Rd  
Winnemucca, NV 89445

**Please Print**

Owner  Tenant  Agent Name: JANE ANGUS  
Address: 5540 West Rose Creek Rd Telephone: (775) 5625-4451  
City, State, Zip + 4: Winnemucca NV 89445 Email Address: \_\_\_\_\_  
Signature: Jane Angus Date: \_\_\_\_\_  
Contact for meter access: Jane Angus Contact's Telephone: (775) 625-4451

STATE ENGINEERS OFFICE  
2015 NOV 19 AM 11:16  
RECEIVED

### MODEL MT100

### THREADED END FLOWMETER

#### DESCRIPTION

The Model MT100 is manufactured to comply with the applicable provisions of the American Water Works Association Standard No. C704-02 and latest revisions for propeller type flowmeters. The threaded ends of the MT100 allow it to be directly coupled into an existing pipeline. The carbon steel flow tube has a fusion-bonded epoxy coating offering excellent corrosion protection. As with all McCrometer propeller flowmeters, standard features include a magnetically coupled drive, instantaneous flowrate indicator and straight-reading, six-digit totalizer.

Impellers are manufactured of high-impact plastic, capable of retaining their shape and accuracy over the life of the meter. Each impeller is individually calibrated at the factory to accommodate the use of any standard McCrometer register, and since no change gears are used, the MT100 can be field-serviced without the need for factory recalibration. Factory lubricated stainless steel bearings are used to support the impeller shaft. The shielded bearing design limits the entry of materials and fluids into

the bearing chamber providing maximum bearing protection.

An instantaneous flowrate indicator is standard and available in gallons per minute, cubic feet per second, liters per second and other units. The register is driven by a flexible steel cable encased within a protective self-lubricating liner. The register housing protects both the register and cable drive system from moisture while allowing clear reading of the flowrate indicator and totalizer.

#### INSTALLATION

Standard installation is horizontal mount. If the meter is to be mounted in the vertical position, please advise the factory. A straight run of full pipe the length of ten pipe diameters upstream and two diameters downstream of the meter is recommended for meters without straightening vanes. Meters with optional straightening vanes require at least five pipe diameters upstream and two diameters downstream of the meter.




The McCrometer Propeller flowmeter comes with a standard instantaneous flowrate indicator and straight-reading totalizer. An optional FlowCom register is also available. Typical face plates.



#### APPLICATIONS

The McCrometer propeller meter is the most widely used flowmeter for municipal and wastewater treatment applications as well as agricultural and turf irrigation measurement. Typical applications include:

- Water and wastewater management
- Truck loading and discharge
- Sprinkler irrigation systems
- Drip irrigation systems
- Golf course and park water management
- Commercial nurseries

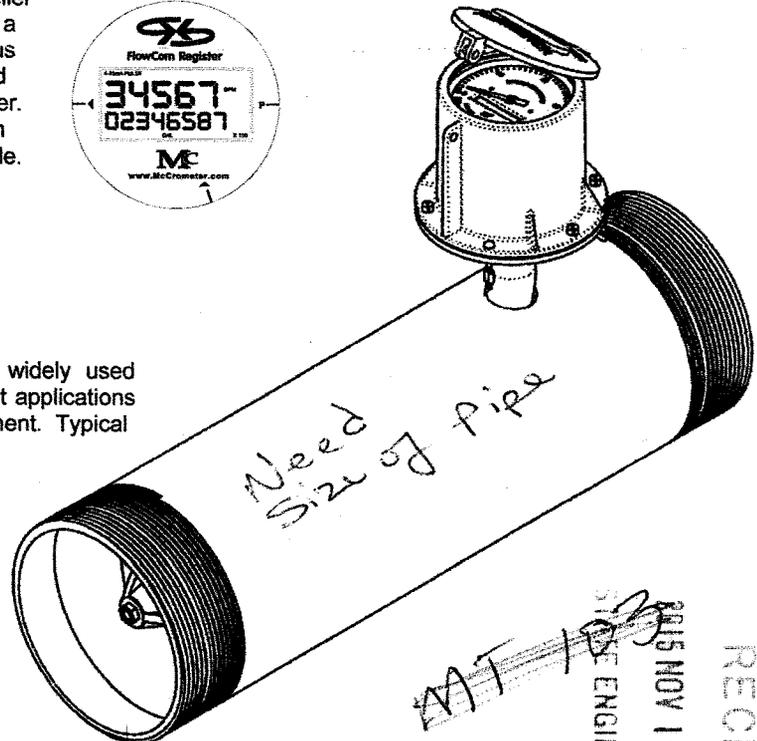

RECEIVED  
 NOV 19 AM 11:16  
 CIVIL ENGINEERS OFFICE