

North Bullfrog Hills Project - Mayflower Area

Materials			
	Well Casing	Units	Amount
	Blank*		
	4 inch dia, LCS, Schedule 40, 1/4 inch wall	ft	2800
	Screen*		
	4 inch dia, LCS, Schedule 40, 1/4 inch wall	ft	400
	1/8 inch wide FulFlo Louvers,		
	Conductor Casing		
	Blank		
	10 inch dia, LCS, Schedule 40, 3/16 inch wall	ft	80
	Bull Nose cap		
	4 inch dia, LCS, Schedule 40, 1/4 inch wall	items	4
	Well Monuments		
	Blank		
	8 inch dia, LCS, Schedule 40, 1/4 inch wall	ft	40
	Locking Cap	items	4
	*Casing will have welded collars of similar material		
	Filter Pack		
	Gravel Pack		
	3/8 - to 1/4+ inch SRI Silica Sand gravel pack	ft ³	133.5
	Well Seal		
	Neat Cement, surface seal	ft ³	27.3
	Concrete Grout Seal	ft ³	65.4
	3/8 inch Bentonite Hole Plug	ft ³	848.2
	VWP Installation		
	Datalogger		
	LC-2 w strain relief, one channel, RS-232	items	4
	VWP, unvented, 2 Mpa	items	4
	Cable, Blue PVC Cable, 0.250", twisted pairs		
	2- 1,000 ft lengths	ft	2000
	2- 600 ft lengths	ft	1200
	Label1 Cabel Label Charge every 100 ft		

**DCNR/DWR
RECEIVED**


NOV 05 2012

LAS VEGAS OFFICE

MEMW-A
Corvus Gold Nevada, INC.
North Bullfrog Project



Schlumberger
WATER SERVICES

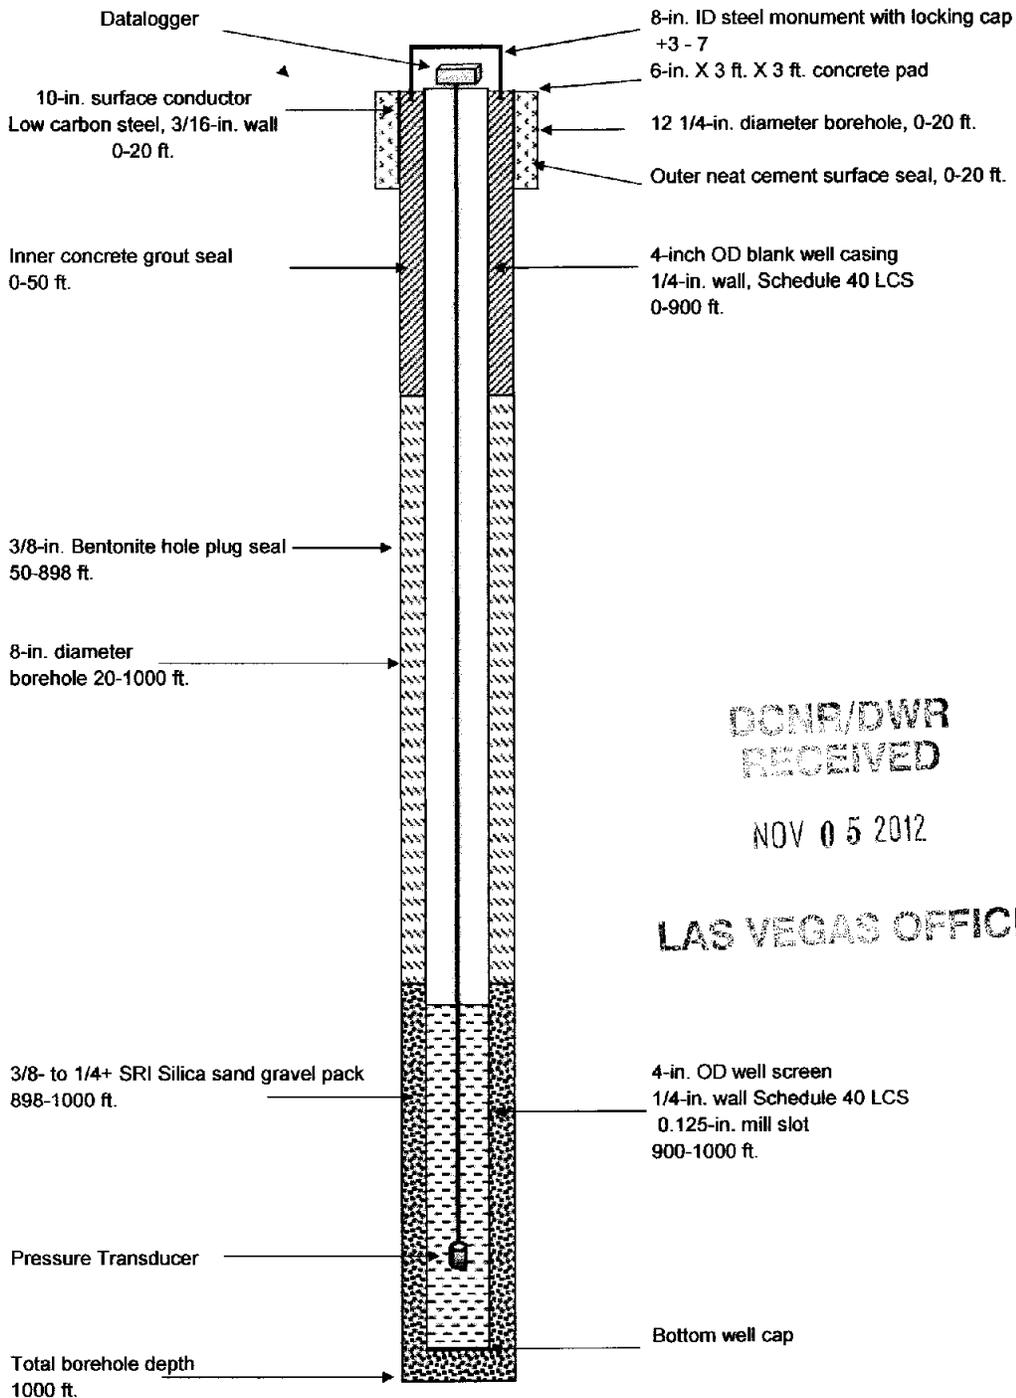

DCNR/DWR
RECEIVED

NOV 05 2012

LAS VEGAS OFFICE

Not to Scale