

North Bullfrog Hills Project - Mayflower Area

Materials				Units	Amount
Well Casing					
	Blank*				
	4 inch dia, LCS, Schedule 40, 1/4 inch wall			ft	2800
	Screen*				
	4 inch dia, LCS, Schedule 40, 1/4 inch wall			ft	400
	1/8 inch wide FulFlo Louvers,				
Conductor Casing					
	Blank				
	10 inch dia, LCS, Schedule 40, 3/16 inch wall			ft	80
Bull Nose cap					
	4 inch dia, LCS, Schedule 40, 1/4 inch wall			items	4
Well Monuments					
	Blank				
	8 inch dia, LCS, Schedule 40, 1/4 inch wall			ft	40
	Locking Cap			items	4
*Casing will have welded collars of similar material					
Filter Pack					
	Gravel Pack				
	3/8 - to 1/4+ inch SRI Silica Sand gravel pack			ft ³	133.5
Well Seal					
	Neat Cement, surface seal			ft ³	27.3
	Concrete Grout Seal			ft ³	65.4
	3/8 inch Bentonite Hole Plug			ft ³	848.2
VWP Installation					
	Datalogger				
	LC-2 w strain relief, one channel, RS-232			items	4
	VWP, unvented, 2 Mpa			items	4
Cable, Blue PVC Cable, 0.250", twisted pairs					
	2- 1,000 ft lengths			ft	2000
	2- 600 ft lengths			ft	1200
	Label1 Cabel Label Charge every 100 ft				

DNR/DWR
RECEIVED


NOV 05 2012

LAS VEGAS OFFICE

MFW-D
Corvus Gold Nevada, INC.
North Bullfrog Project



Schlumberger
WATER SERVICES

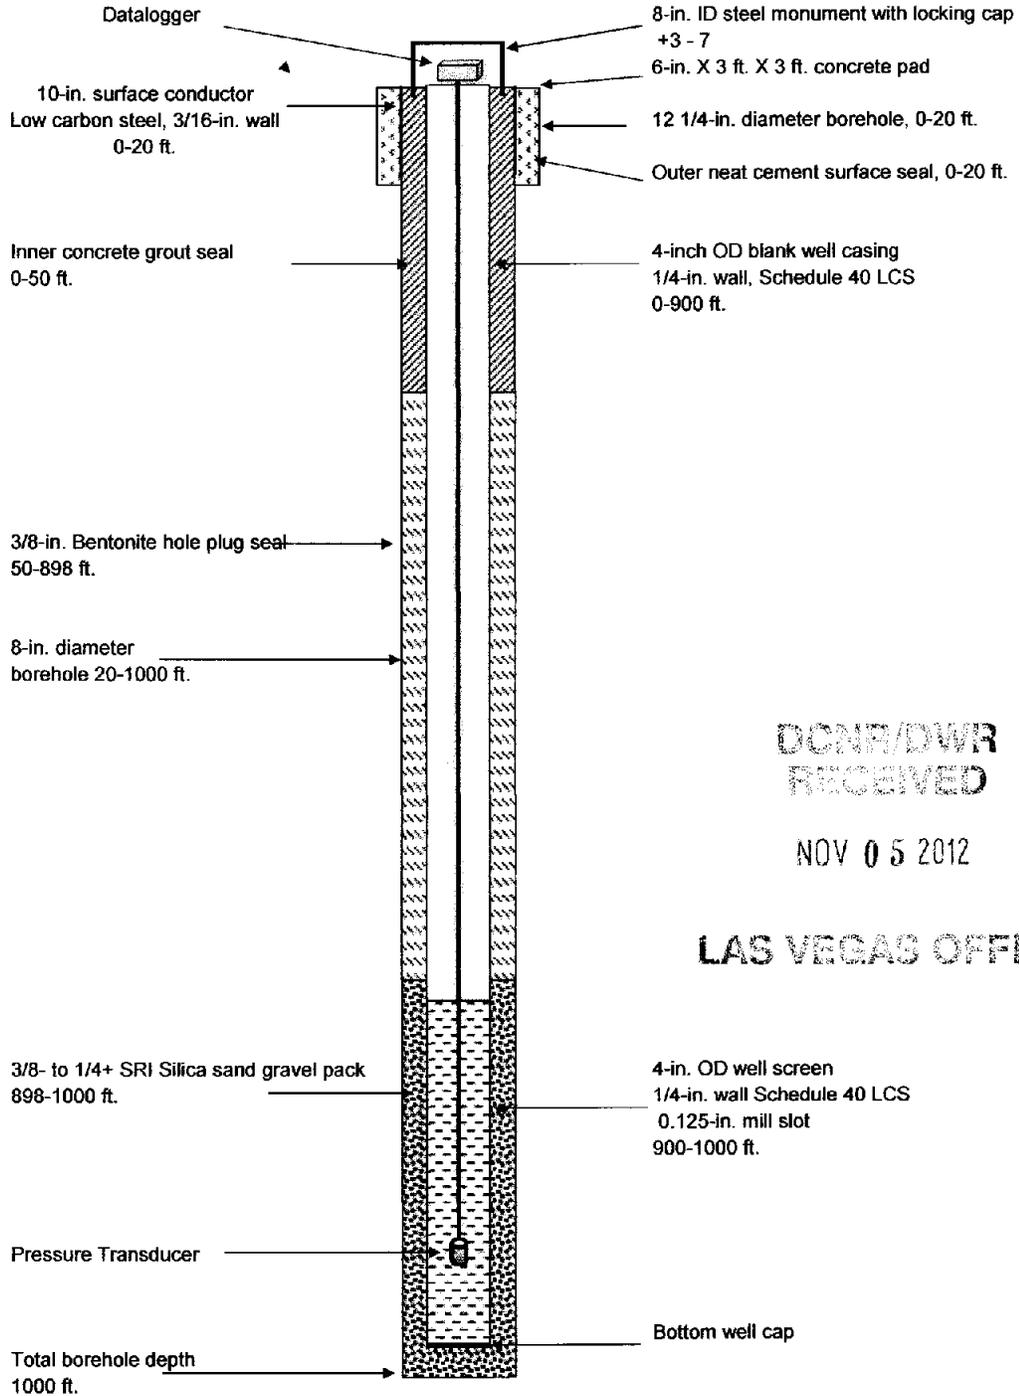

DCNR/DWR
RECEIVED

NOV 05 2012

LAS VEGAS OFFICE

Not to Scale