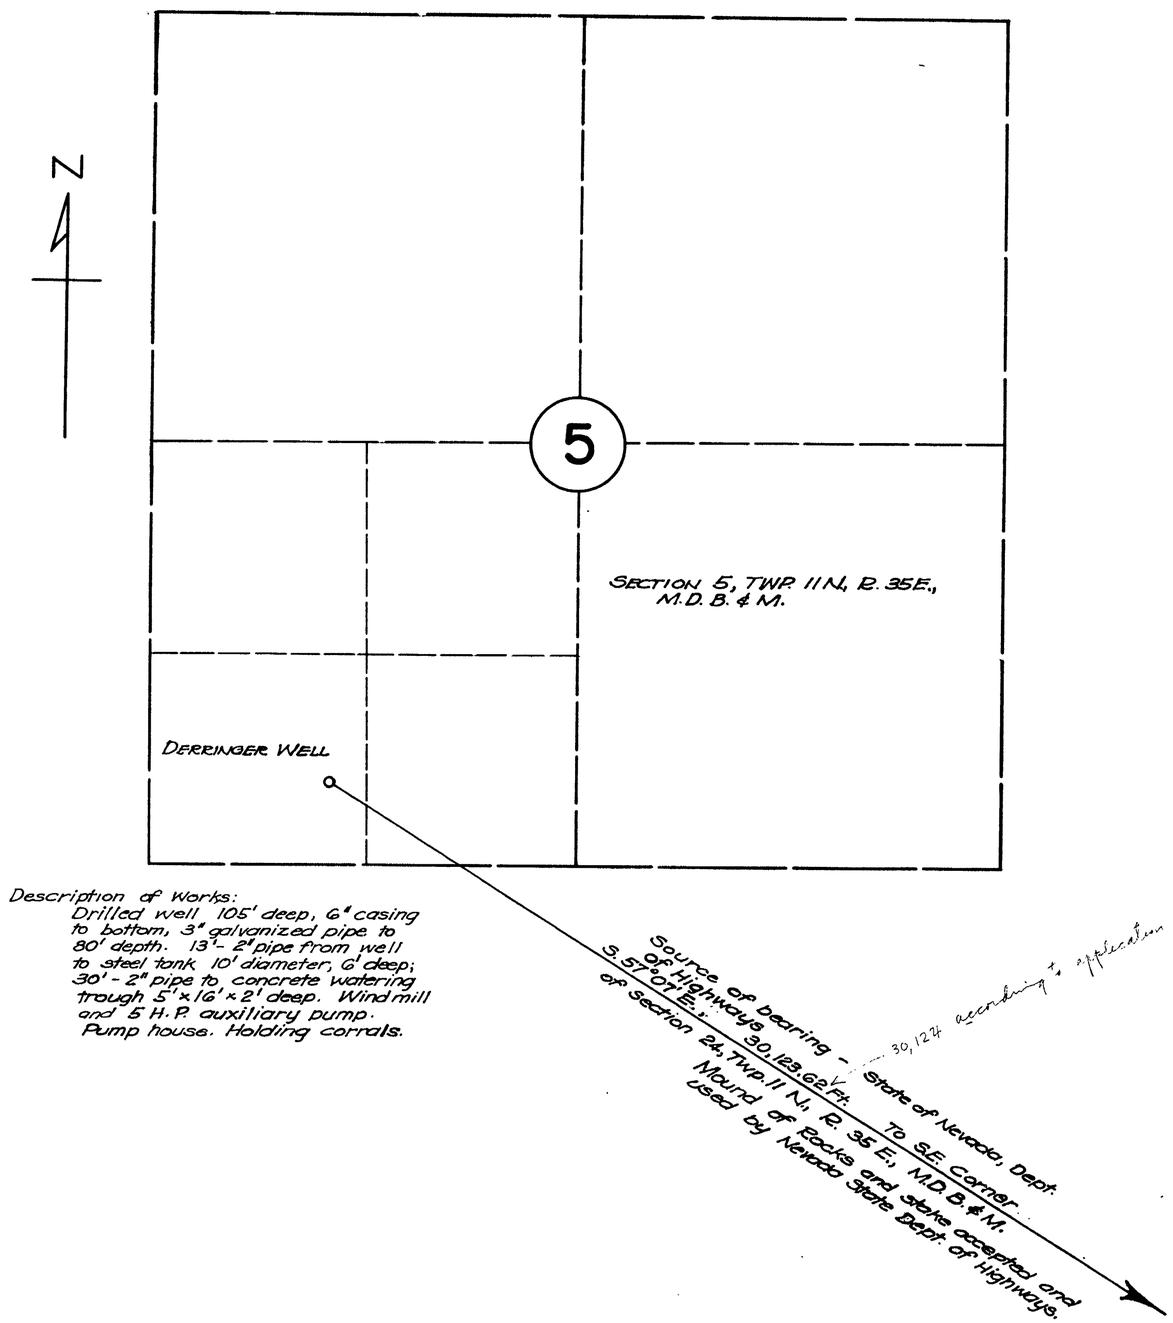

Description of Works:
Drilled well 105' deep, 6" casing to bottom, 3" galvanized pipe to 80' depth. 13'- 2" pipe from well to steel tank 10' diameter, 6' deep; 30' - 2" pipe to concrete watering trough 5' x 16' x 2' deep. Windmill and 5 H.P. auxiliary pump. Pump house. Holding corrals.

STATE OF NEVADA
COUNTY OF ORMSBY } SS

I, James D. Wallace Jr., being first duly sworn, depose and say this map consisting of one sheet, has been correctly drawn to the designated scale from field notes of a survey made under my supervision and direction on January 1946. that it truly and correctly represents the location and extent of the works used to divert water from a well in NYE COUNTY by WALTER W. WHITAKER for stockwatering purposes. That the point of diversion, the place and manner of use are fully and correctly designated hereon.

James D. Wallace, Jr.
STATE WATER RIGHT SURVEYOR

Subscribed and sworn to before me this 26th day of August, 1948

Carl A. Springmeyer.
Notary Public in and for Ormsby County, Nevada.

Certificate No. 3483 - July 28, 1950 for 0.01 c.f.s.

FILED
August 27, 1948
STATE ENGINEER'S OFFICE

McLEOD-WALLACE-JOHNSTONE-ENGINEERING, CARSON CITY, NEVADA.

MAP TO ACCOMPANY APPLICATION TO APPROPRIATE WATER FOR STOCKWATERING PURPOSES BY WALTER W. WHITAKER FROM UNDERGROUND SOURCE

SCALE-1 INCH=500 FEET APRIL 3, 1948.

12067

12067