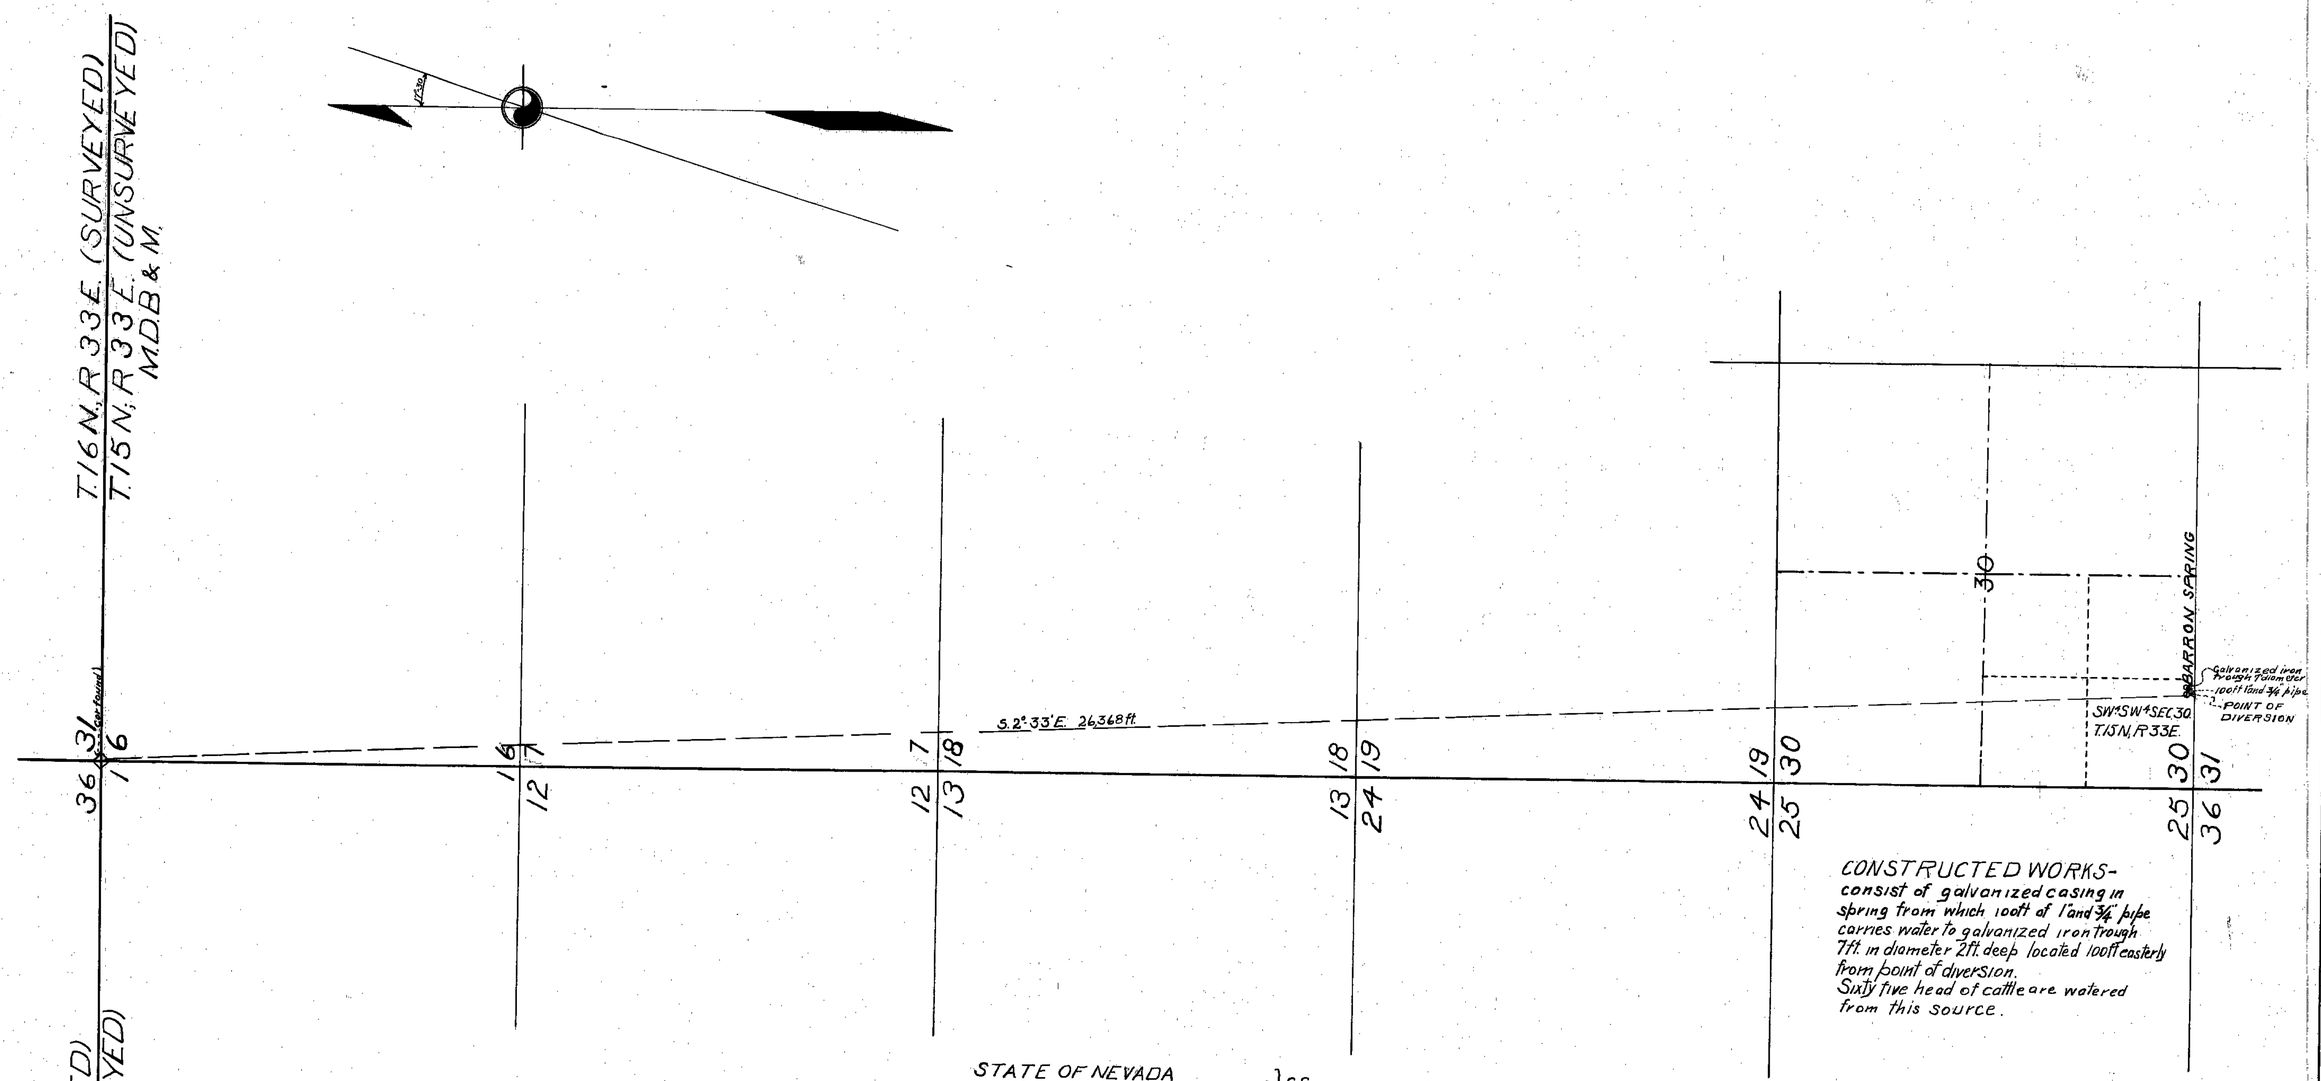

CONSTRUCTED WORKS-
consist of galvanized casing in spring from which 100ft of 1 and 3/4 pipe carries water to galvanized iron trough 7ft. in diameter 2ft. deep located 100ft easterly from point of diversion.
Sixty five head of cattle are watered from this source.

STATE OF NEVADA
COUNTY OF CHURCHILL } S.S.

I, L.W. Crehore, being first duly sworn, depose and say that this map consisting of one sheet, has been correctly drawn to the designated scale from field notes of a survey made by me between the 16th and 17th day of October 1927 that it truly and correctly represents the location and extent of the works used to divert water from Barron Spring in Churchill County by George W. O'Neill for Stockwatering purposes; that the point of diversion, the location and size of diverting channel or other conduit, the place and manner of use and the location and names of all other works or streams which are crossed by or connected with the said works are fully and correctly designated thereon.

L. W. Crehore
STATE WATER RIGHT SURVEYOR

Subscribed and sworn to before me this 1st day of November 1927
[illegible]
NOTARY PUBLIC IN AND FOR CHURCHILL COUNTY NEVADA.

Certificate No. 1315 Feb. 1, 1928

FILED Nov. 5, 1927 STATE ENGINEER'S OFFICE

OFFICE STATE ENGINEER NOV 5 '27 RECEIVED ANS.

MAP TO ACCOMPANY
PROOF OF BENEFICIAL USE
UNDER APPLICATION №7236
FOR
STOCKWATERING
BY
GEORGE W. O'NEILL
FROM
BARRON SPRING

7236