


STATE OF NEVADA  
DEPARTMENT OF CONSERVATION AND NATURAL RESOURCES  
Carson City

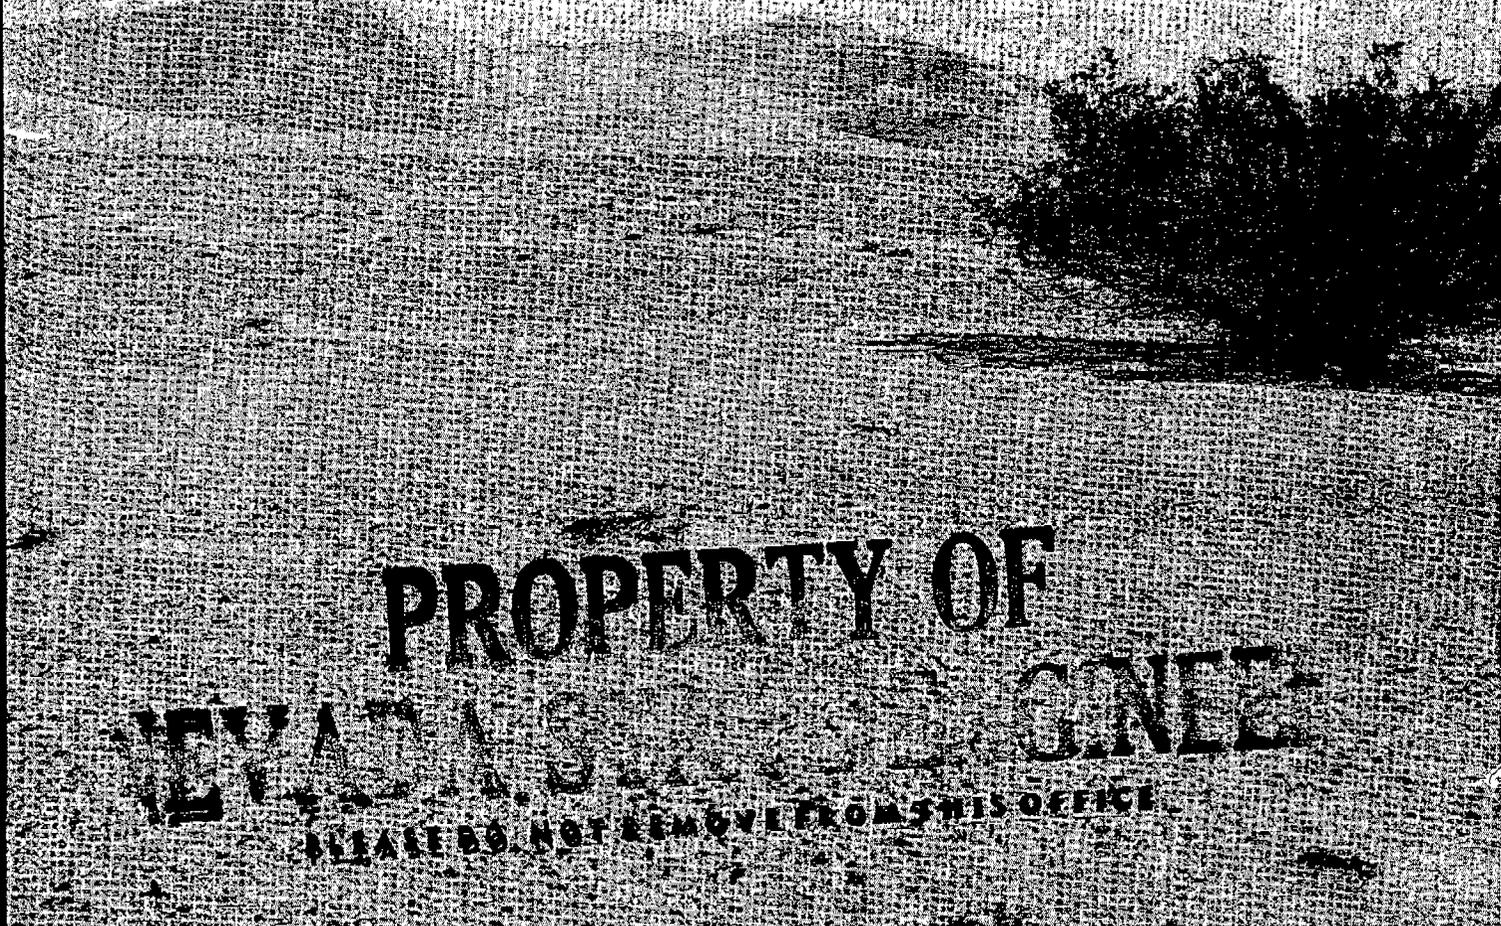

PROPERTY OF

NEVADA STATE GEOLOGICAL SURVEY

PLEASE DO NOT REMOVE FROM THIS OFFICE

Big Dune, Amargosa Desert


GROUND-WATER RESOURCES – RECONNAISSANCE SERIES  
REPORT 14

GEOLOGY AND GROUND WATER OF AMARGOSA DESERT,  
NEVADA-CALIFORNIA

By  
GEORGE E. WALKER  
and  
THOMAS E. EAKIN  
Geologists

Prepared cooperatively by the  
Geological Survey, U. S. Department of the Interior

MARCH 1963

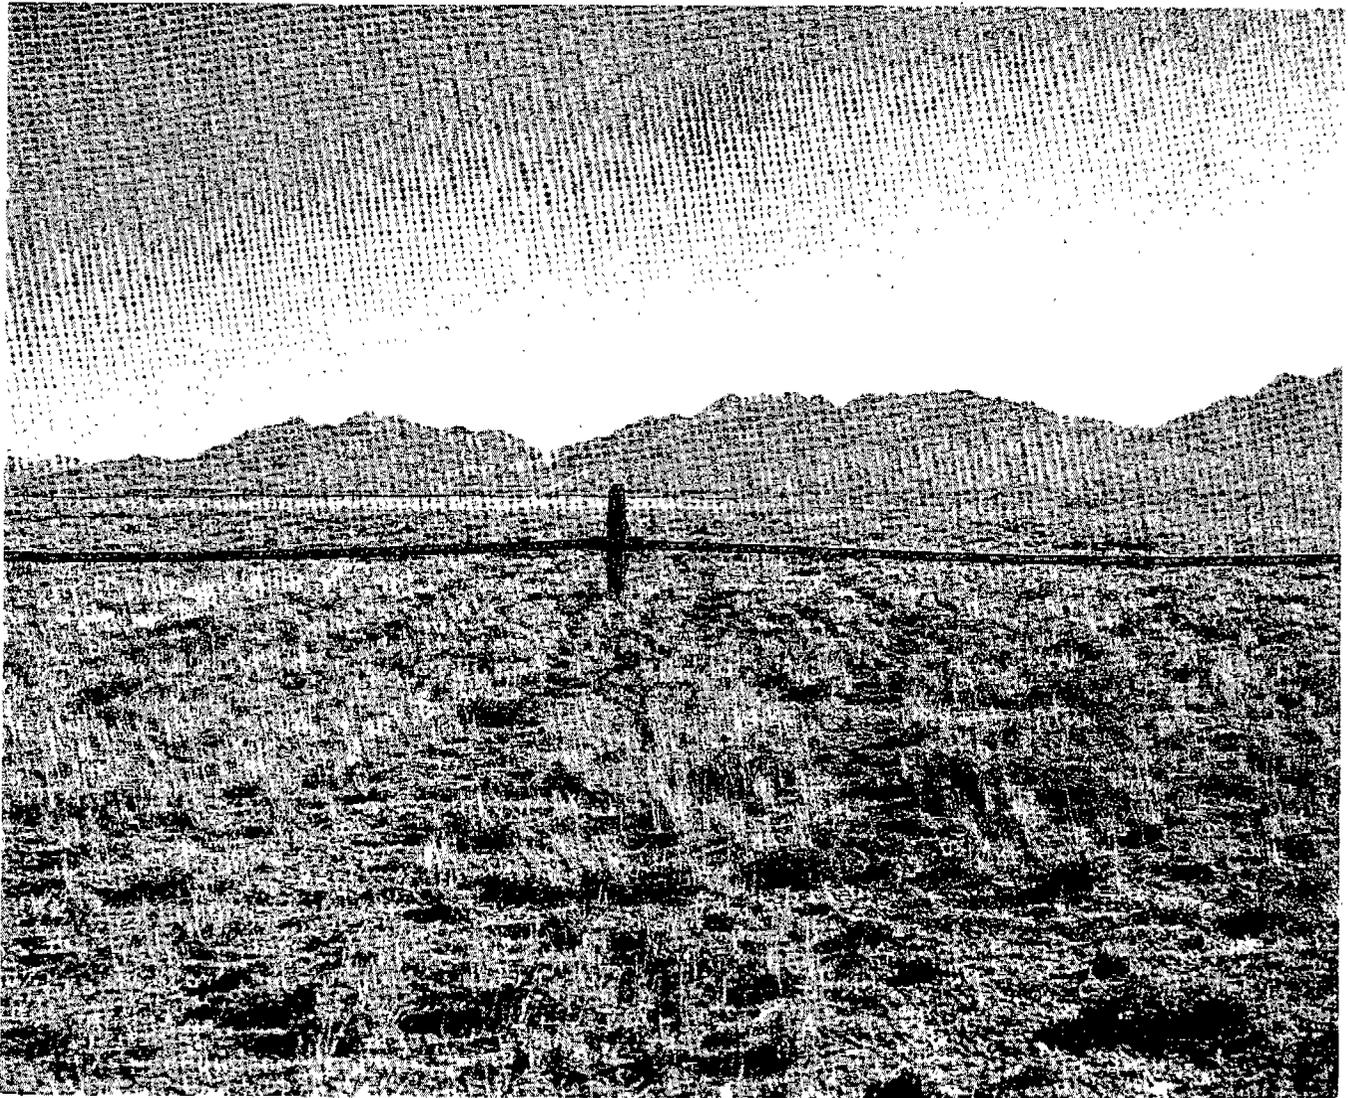

**View south of part of irrigated alfalfa field in the NE $\frac{1}{4}$ , sec. 23, T. 15 S., R. 48 E. Light colored vegetation is dry remnants of 1962 growth. New growth is developing from recent irrigation. March 1963.**

Photograph by T. E. Eakin.

#### **COVER PHOTOGRAPH**

**View of northwest side of Big Dune in April 1962. Main mass of dune migrates within a 3- to 4-square mile area in response to wind patterns. Note sand accumulation trailing downward from scattered bushes in foreground.**

Photograph by T. E. Eakin.

GROUND-WATER RESOURCES - RECONNAISSANCE SERIES

Report 14

GEOLOGY AND GROUND WATER OF AMARGOSA DESERT,  
NEVADA-CALIFORNIA

by

George E. Walker  
and  
Thomas E. Eakin

Geologists

Prepared cooperatively by the

Geological Survey

U. S. Department of the Interior

March

1963


## FOREWORD

This report is the 14th in the reconnaissance ground-water series. It covers the ground-water resources of the Amargosa Desert in Nevada and California and considers the problem of the movement of water from areas beyond the surficial boundaries of the area. The authors, George E. Walker and Thomas E. Eakin, conclude that only a small part of the ground-water of Amargosa Desert, which is defined to include Ash Meadows, derives from the precipitation which falls on the land surface within the geographical boundaries of the area. The authors suggest that much of the ground water of the area is a contribution from other areas and arrives by movement through underlying Paleozoic carbonate rocks.

This report indicates that the average annual recharge to the underground waters of Amargosa Desert and Ash Meadows is on the order of 24,000 acre-feet. Of this amount, 17,000 acre-feet are discharged by the springs in Ash Meadows and 7,000 acre-feet is potentially available for pumping from the underground water in Amargosa Desert.

The report also points out that there is a very large quantity of ground water in storage in the Amargosa Desert area. While the report does not discuss the agricultural land resources of Amargosa Desert, available information indicates that the acreage of good agricultural land is limited. There seems a reasonable possibility that if all of the estimated 7,000 acre-feet of the annual increment was made available, only a modest annual withdrawal of the stored water would be necessary to permit development of the total area of desirable agricultural land. The situation strongly suggests that a planned withdrawal of ground-water in excess of the estimated annual recharge may be reasonable and desirable.

As suggested in this report and in previous publications, the subject of the inter-basin movement of ground water should be investigated. A knowledge of such inter-basin movements of ground water is necessary to an understanding of the ground water resources of any area in a region in which such ground water movements occur and to the full utilization of these resources.

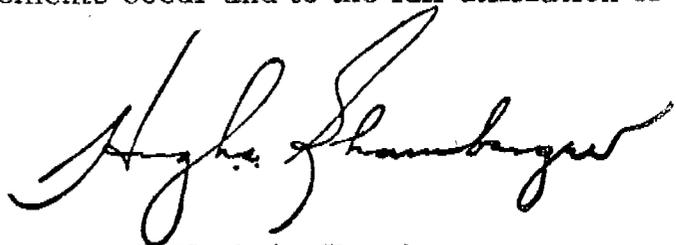

Hugh A. Shamberger  
Director  
Department of Conservation and  
Natural Resources

# CONTENTS

	<u>Page</u>
Summary . . . . .	1
Introduction . . . . .	3
Purpose and scope of investigation . . . . .	3
Location and extent of area . . . . .	4
Acknowledgments . . . . .	4
Numbering system for wells and springs . . . . .	4
Physical environment . . . . .	5
Surface features . . . . .	5
Climate . . . . .	6
Geology . . . . .	9
Rocks of Precambrian (?) and Paleozoic age . . . . .	10
Volcanic rocks of Tertiary and Quaternary age . . . . .	10
Valley fill of Tertiary and Quaternary age . . . . .	10
Alluvium of Quaternary age . . . . .	11
Structure . . . . .	11
Geologic history . . . . .	12
Water-bearing properties of the rocks . . . . .	13
Water resources . . . . .	14
Surface water . . . . .	14
Ground water . . . . .	15
Occurrence and movement . . . . .	15
Water-level fluctuations . . . . .	17
Estimated average annual recharge . . . . .	17
Estimated average annual discharge . . . . .	21
Perennial yield . . . . .	28
Storage . . . . .	29
Chemical quality . . . . .	32
Development . . . . .	37
Conclusions . . . . .	40
Proposals for additional ground-water studies . . . . .	41
References cited . . . . .	42
List of previously published reports . . . . .	45

TABLES

	<u>Page</u>
Table 1. Average monthly and annual precipitation for Beatty and Lathrop Wells, Nev., 1952-61 . . .	7
2. Average monthly and annual temperatures for Beatty and Lathrop Wells, Nev., 1952-61 . . .	8
3. Records of selected wells in the Amargosa Desert, Nevada-California . . . . .	Back of report
4. Drillers' logs of selected water wells in the Amargosa Desert, Nevada-California . . . . .	Back of report
5. Records of water-level measurements in selected wells in the Amargosa Desert, Nevada-California . . . . .	18
6. Estimated average annual ground-water recharge from precipitation in Amargosa Desert and tributary areas . . . . .	20
7. Estimated average annual ground-water discharge by natural processes from the Amargosa Desert, Nevada-California . . . . .	23
8. Records of springs in the Amargosa Desert, Nevada-California . . . . .	25
9. Chemical analyses, in parts per million, of water from selected wells and springs, in the Amargosa Desert, Nevada-California . . . . .	following p. 32

ILLUSTRATIONS

	<u>Page</u>
Plate	1. Map of the tributary area of Amargosa Desert, Nevada and California . . . . . in pocket
	2. Generalized geologic map of the Amargosa Desert in the vicinity of Lathrop Wells, Nev., and Death Valley Junction, Calif. . . . in pocket
	3. Hydrologic map of Amargosa Desert in the vicinity of Lathrop Wells, Nevada, and Death Valley Junction, California, showing locations of wells and springs and generalized water-level contours for 1962 . . . . . in pocket
	4. Map of the Amargosa Desert in the vicinity of Lathrop Wells, Nevada and Death Valley Junction, California showing diagrams representing chemical quality for water samples collected from selected wells and springs . . . in pocket
Figure	1. Map of Nevada showing areas described in previous reports of the Ground-Water Reconnaissance Series and the area described in this report . . . . . following p. 3
	2. Hydrographs for eight wells in Amargosa Desert, Nye County, Nevada . . . . . following p. 18
	3. Diagram for the classification of irrigation water . . . . . following p. 33
Photographs	1. View of Big Dune, Amargosa Desert, Nye County, Nevada . . . . . cover
	2. View of irrigated field of alfalfa early in growing season in sec. 23, T. 15 S., R. 48 E., Nye County, Nevada . . . . . inside cover

GEOLOGY AND GROUND WATER OF AMARGOSA DESERT,  
NEVADA-CALIFORNIA

by  
George E. Walker and Thomas E. Eakin

\*\*\*\*\*

SUMMARY

The Amargosa Desert is a north-northwest trending intermontane valley in the south-central part of the Basin and Range physiographic province. The climate is arid, and precipitation in the area averages less than 5 inches annually.

The valley is surrounded by mountain ranges composed of rocks of Precambrian (?), Paleozoic, and Tertiary age, consisting principally of tuff and lava, dolomite, limestone, shale, siltstone, quartzite, and slate in varying proportions. These mountains were uplifted by faulting and tilting during the late Tertiary and early Quaternary time. Erosion products of the surrounding mountains have filled the basin of the valley with several hundred feet of alluvium, including lake and stream deposits.

The amount of water that may be available annually is estimated to be about 17,000 acre-feet from the springs issuing from Paleozoic carbonate rocks in Ash Meadows, and about 7,000 acre-feet from wells developed in the valley fill to the northwest and northeast of the springs in the Amargosa Desert. The estimated perennial yield of Amargosa Desert is the sum of the two, or 24,000 acre-feet, and is based on the estimate of average annual ground-water discharge.

Ground-water pumpage by wells during the summer of 1962 is roughly estimated to be 3,000 acre-feet. Of the 162 wells listed in this report, of which more than 100 are for irrigation, only 18 were reported to have been pumped during the summer of 1962.

Analyses of 28 samples of water from wells and springs in the area indicate that the water commonly can be used for irrigation but generally is classed as medium-salinity water or poorer and may require leaching of the soil. Medium- to high-sodium water occurs locally with the poorer quality water and generally is found in the southern part of the area.

Of 19 analyses for boron, 9 had concentrations less than 0.33 ppm, 9 had concentrations between 0.36 and 1.4 ppm, and 1 had a concentration of 2.8 ppm. The median value of 0.36 ppm for the 19 analyses suggests that the boron concentration may offer a problem in the growing of some crops.

For public supplies the ground water generally is suitable, except that the fluoride concentration may locally be greater than twice the optimum recommended limits (about 1.4 ppm) of the U.S. Public Health Service. Of 28 analyses for fluoride, 26 have concentrations greater than 0.7 ppm, the optimum control limit recommended by U.S. Public Health Service. Of these, 14 have concentrations of more than 1.4 ppm and 10 have concentrations of 2.8 ppm or more.

About 1.4 million acre-feet of ground water is estimated to be stored in the upper 100 feet of saturated alluvial deposits beneath a four-township area roughly enclosing the area of principal concentration of wells. Although not permissible under the present Nevada ground-water law, some consideration has been given to the effects of planned over-development; that is, regulated withdrawal in excess of the perennial yield. A simplified illustration of the effect of overdevelopment on ground-water levels suggests that pumping at the rate of 60,000 acre-feet a year would lower water levels in this four township area an average of 100 feet in about 25 years and would intercept most of the recharge now moving through the valley toward the area of natural discharge.

## INTRODUCTION

In recent years there has been a large increase in the development of ground water in Nevada. The increase is partly due to the interest and efforts to bring new land under cultivation. This has created the need for more information on the ground-water resources throughout the State.

Recognizing this need, the State Legislature enacted special legislation (Chap. 181, Stats. 1960) for beginning a series of reconnaissance studies of ground-water resources of Nevada. These studies are made by the U.S. Geological Survey in cooperation with the Nevada Department of Conservation and Natural Resources.

A special report series to expedite publication of the results of these reconnaissance studies has been established by the Department of Conservation and Natural Resources. The present report is the fourteenth in this series. It describes the physical conditions of the Amargosa Desert in Nye County, Nevada, and Inyo County, California, and includes observations and evaluations of the interrelation of climate, geology, and hydrology as they affect the ground-water resources. It also includes an evaluation of the chemical quality of the ground water and its suitability for irrigation and domestic use.

Figure 1 shows the areas discussed in previous reports of the reconnaissance series and in this report.

### Purpose and Scope of Investigation

The present reconnaissance investigation was undertaken to appraise and evaluate ground-water conditions in the Amargosa Desert prior to additional extensive irrigation development. The short time available limited the scope of the investigation. However, much useful data were collected during this investigation and are described in tables 3 to 5, 8, and 9 of this report.

The senior author did the field work during the summer of 1962, including an inventory of all irrigation wells, domestic wells, and springs; collection of water samples for chemical analysis; and a geologic reconnaissance of the valley fill. He also prepared the major part of the report. The junior author prepared the sections on storage, chemical quality, recharge, discharge, perennial yield, and development. The authors profited by consultation with their colleagues, especially I. J. Winograd and R. A. Young on several aspects of ground water in the area. Mr. Young further gave valuable assistance in the field and in report preparation. The investigation was made under the general direction of G. F. Worts, Jr., district chief in-charge of water-resources studies in Nevada.

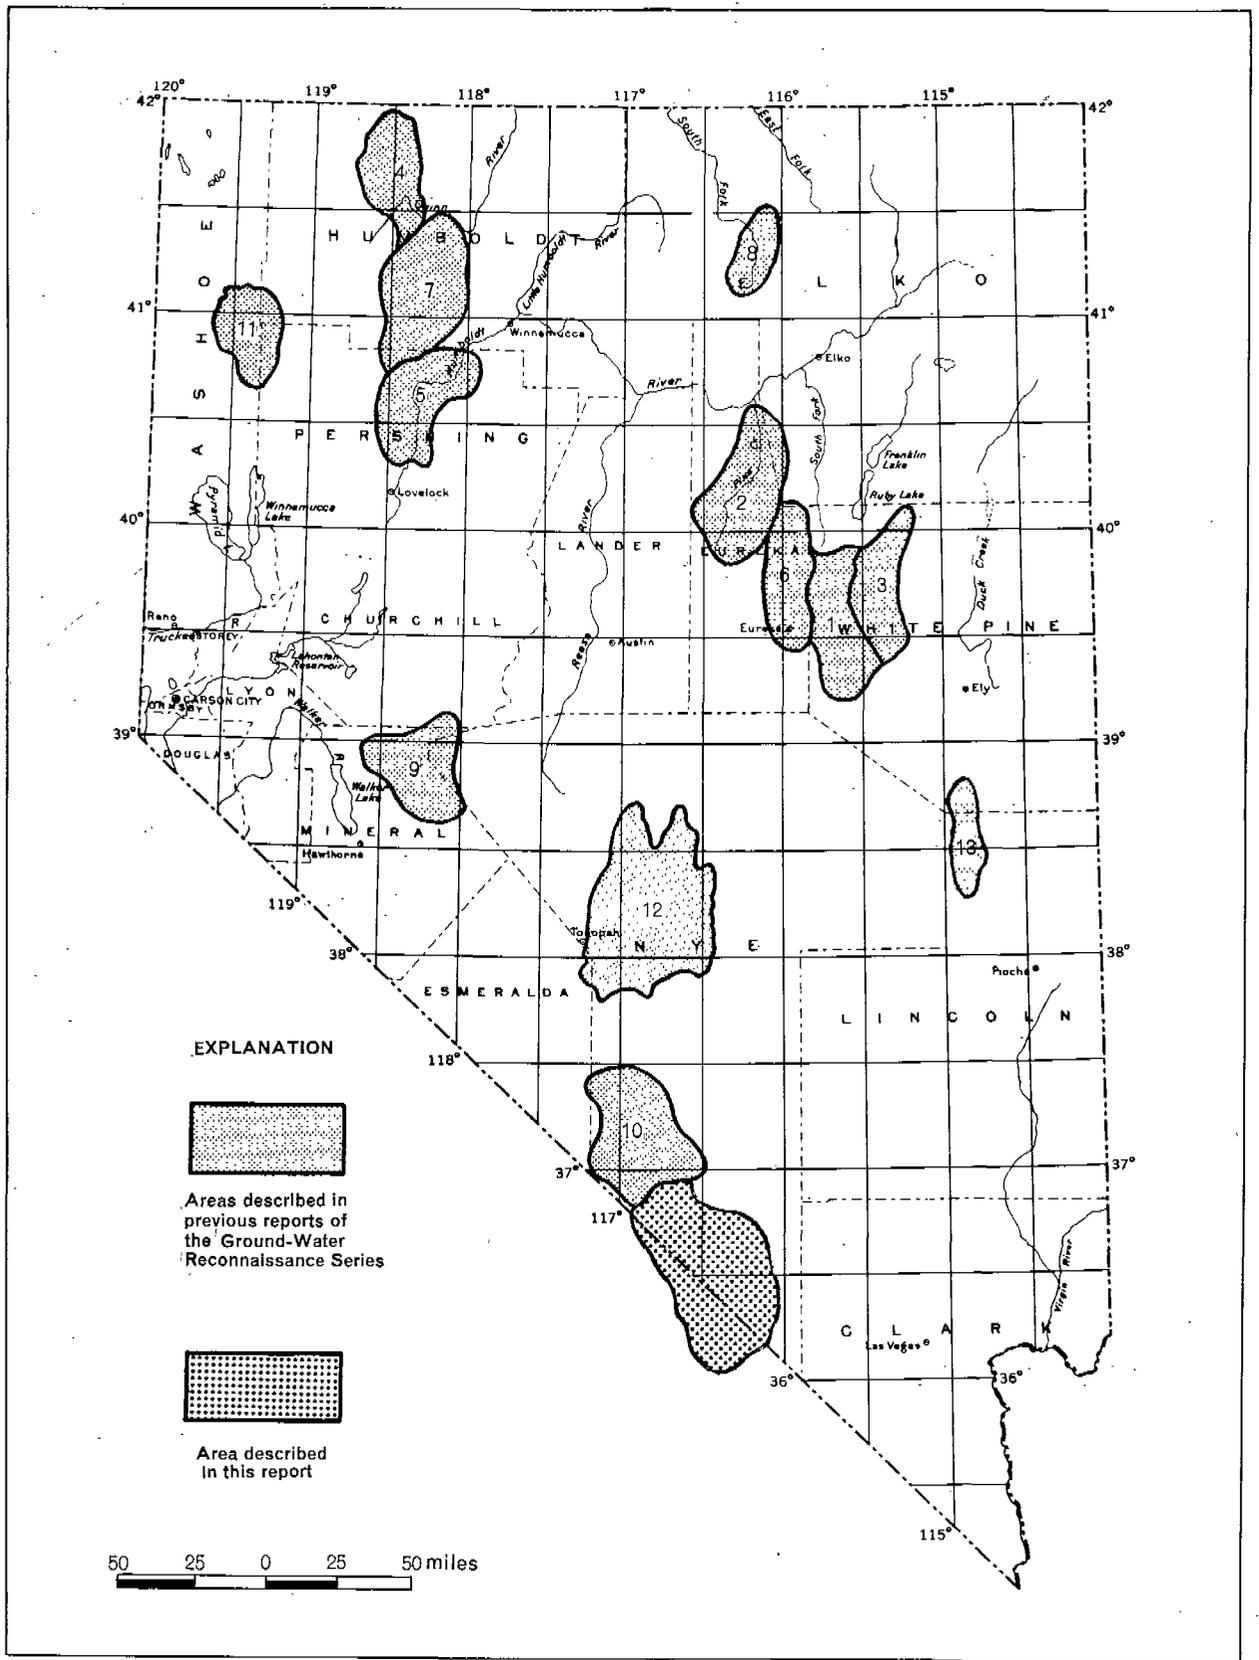


Figure 1. Map of Nevada showing areas described in previous reports of the ground-water reconnaissance series and the area described in this report

Some data were obtained from unpublished manuscripts and published reports. Much of the geologic conditions within and surrounding the area are described in reports by Ball (1907), Denny and Drewes (written communication, 1962), Jennings (1958), Cornwall and Kleinhampl (1961), and Burchfiel (written communication, 1960 and 1961).

### Location and Extent of Area

The Amargosa Desert lies south of Beatty, Nevada, and extends south-southeastward to Eagle Mountain, California, a distance of some 50 miles. It is about 30 miles across at its widest point. The total surficial drainage area of Amargosa Desert, including its tributaries Oasis Valley, Crater Flat, Fortymile Canyon, Jackass Flats, and Rock Valley, is about 2,600 square miles (Pl. 1). However, most of the available data are concentrated in the southern two-thirds of the valley, between Lathrop Wells and Death Valley Junction, which is the principal area discussed in this report. More specifically, the principal area includes that part of Amargosa Desert between Big Dune and the Spring Mountains southward to Eagle Mountain. This restricted area is about 600 square miles and is shown on plates 2, 3, and 4.

### Acknowledgements

Acknowledgment is made to all the individuals who have given information on their wells and especially to those who have permitted repeated access to their properties. Mr. H. V. Weimer and Mr. L. C. Cook, well drillers within the area, supplied a number of well logs (table 4) and other data. Most of the well logs shown in table 4 were supplied by the State Engineer's office.

Special thanks are due to C. S. Denny and H. Drewes of the Geological Survey for permission to draw upon the draft of their report on the geology of the Ash Meadows quadrangle, Nevada-California.

### Numbering System for Wells and Springs

The well-numbering system used in the Amargosa Desert indicated the location of wells and springs within the official rectangular subdivision of the public lands, with reference to the Mount Diablo base line and meridian in Nevada and the San Bernardino base line and meridian in California. The first segment of a number designates the township. The "S" for wells in Nevada indicates that the township is south of the Mount Diablo base line; the "N" for wells in California indicates that the township is north of the San Bernardino base line. The second segment, separated from the first by a slant, denotes the range east of the respective meridians. The third segment, separated from the second by a dash, identifies the section number, followed by a letter which designates the quarter section in which the well or spring is located. The letters a, b, c, and d designate, respectively, the northeast, northwest, southwest, and southeast quarters of the section. The number following the letter designates the order in which the well was recorded in the quarter

section. Thus, well number 17S/51-1a1 indicates that this well was the first well recorded in the NE 1/4 sec. 1, T. 17 S., R. 51 E.

Owing to limited space, wells and springs on plates 3 to 5 are identified only by the quarter section and serial number. The township in which the well is located can be ascertained by the township and range numbers shown at the margin of the map. The section in which the well is located is numbered for most of the area of the map. Where the section is not numbered, as on plate 1, the section number is added to the quarter section and serial number for the specific well.

Most of the wells listed in table 3 are shown on plate 3. Those outside of the area of plate 3 are shown on plate 1.

## PHYSICAL ENVIRONMENT

### Surface Features

The Amargosa Desert is in the south-central part of the Basin and Range physiographic province. It is north-northwest trending intermountain valley. The Amargosa Desert differs from the typical basin and range intermountain valley in that it is not topographically closed and the playas within it are presently eroding. The Amargosa River and its tributaries are shown on plate 1, which delineates the surficial drainage area north of Eagle Mountain.

Bare and Yucca Mountains and Pahute Mesa are prominent to the north, the Specter Range, northwest end of the Spring Mountains, and Resting Springs Range are prominent to the northeast, east, and southeast, respectively. The Greenwater Range and the Funeral Mountains are dominant topographically to the southwest and west. Pyramid Peak, altitude 6,703 feet, in the Funeral Mountains is the highest peak adjoining the valley. The average relief between the valley floor and the mountain crests is approximately 2,100 feet. The surrounding mountains consist of clastic, carbonate, metamorphic, and pyroclastic rocks ranging in age from Precambrian(?) to Tertiary. The mountains are principal areas of erosion and generally are characterized by relatively steep, barren slopes.

Coalescing alluvial fans and washes form piedmont slopes between the mountains and the lowlands. The alluvial-fan deposits intertongue with lake and playa deposits. The alluvial-fan and wash deposits underlie the intermediate slopes between the mountains and the lower parts of Amargosa Desert. The surfaces of the fan deposits are not smooth but are cut by numerous washes. These washes and the Amargosa River and its tributaries in the lowlands contain alluvium of Recent age.

The gradient of the main axis of the valley is generally south-southeastward and the slope ranges from more than 17 feet per mile in the vicinity

of Big Dune to about 5 feet per mile southeast of Death Valley Junction.

The channel of the Amargosa River heads in Oasis Valley; it continues southeastward through Amargosa Desert past the west side of Eagle Mountain and extends another 40 miles southward; it then turns northwestward, finally terminating in Death Valley. The channel lies between a series of low bedrock outcrops on the western side of Amargosa Desert south of Big Dune and appears to be structurally controlled. The channel carries flood water following cloud-bursts or high-intensity storms. Generally, however, the Amargosa River is intermittent, except for short sections of the channel which contain water from springs and areas where the ground water is at the land surface. For example, numerous springs occur along the Amargosa River in Oasis Valley between Springdale and Beatty (Malmberg and Eakin, 1962, p. 7-8), in Ash Meadows northeast of Death Valley Junction, and near Shoshone about 25 miles south of Eagle Mountain. Ground-water discharge in these spring areas provides low flow to these segments of the Amargosa River during the winter when evapotranspiration is at a minimum. During the summer, the discharge of the springs is almost entirely lost by evapotranspiration, leaving little if any flow in the Amargosa River. During part of the year, ground-water discharges into the channel of Amargosa River near Eagle Mountain. In April 1962, a flow of about one-half a cubic foot per second was observed on the south side of Eagle Mountain.

The chief tributary of the Amargosa River in the Amargosa Desert is Carson Slough. It is along the eastern side of the valley and flows south-southwest where it joins the Amargosa River near Alkali Flat, just north of Eagle Mountain. The chief source of water in Carson Slough is from springs in Ash Meadows. During the summer months, Carson Slough dries up as all of the spring flow is consumed by evapotranspiration.

### Climate

The climate of the Amargosa Desert is arid. The precipitation and humidity are low and summer temperatures and evaporation rates are high. Both daily and seasonally, temperature ranges are large. The U. S. Weather Bureau has only two weather stations within the Amargosa Desert, one at the extreme northwestern end of the area at Beatty, Nevada, and the other at Lathrop Wells, Nevada. The monthly and annual precipitation records at Beatty and Lathrop Wells for the 10-year period 1952-61 are given in table 1.

The average monthly and annual temperatures at Beatty and Lathrop Wells for the 10-year period 1952-61 are shown in table 2. The recorded extremes of temperature at Beatty range from 115°F, to 10°F., and at Lathrop Wells, range from 115°F. to 5°F.

The U.S. Weather Bureau does not maintain an evaporation station within the Amargosa Desert. However, the stations most representative of the Amargosa Desert may be Caliente, or possibly Boulder City, Nevada (Richardson, 1962, written communication).

Table 1. Average monthly and annual precipitation for Beatty and Lathrop Wells, Nev. 1952-61  
(from published records of the U. S. Weather Bureau)

Month	Beatty											Lathrop Wells											Average age 1/
	1952	1953	1954	1955	1956	1957	1958	1959	1960	1961	Average	1952	1953	1954	1955	1956	1957	1958	1959	1960	1961	Average	
Jan.	1.98	.04	1.30	.99	.02	.67	.15	.46	.70	1.16	.75	--	--	1.31	.75	.05	.69	.35	--	--	.36	.63	
Feb.	.02	.00	.68	.12	T	.61	1.12	.96	.47	.00	.40	--	--	.36	.32	.00	.20	.46	--	--	--	.26	
Mar.	2.36	.15	.70	.00	.00	.29	.59	.00	.11	.50	.47	--	--	.70	.00	.00	.59	.40	--	--	--	.33	
Apr.	1.48	.02	.34	.14	1.25	.39	1.52	T	.13	.00	.53	.95	--	T	.28	.91	.54	.75	--	.04	--	.49	
May	.00	.05	.00	1.04	.03	1.29	.45	T	.00	.00	.29	--	--	.00	.33	.00	.83	.46	--	.00	--	.32	
June	.03	.00	.01	.00	.00	.17	.00	.07	.45	.03	.08	--	--	T	.00	.00	.28	.00	--	.00	--	.05	
July	.76	.12	.86	.04	.37	T	.00	.12	.09	.11	.25	--	--	.55	.24	.24	T	.00	--	.00	--	.20	
Aug.	.00	.11	T	1.40	.00	.00	.39	.10	.00	.23	.22	--	--	.00	.75	.00	.00	.77	--	.00	--	.30	
Sept.	.08	.00	.45	.00	.00	.06	.05	.69	.50	.00	.18	--	--	.00	.00	T	.00	.05	--	--	--	.01	
Oct.	.00	.12	.00	.00	T	.74	.51	.00	.38	.00	.18	--	--	T	.00	.00	.85	.64	--	--	--	.29	
Nov.	.58	.13	1.66	.26	.00	.75	.40	.00	2.29	.92	.70	--	--	1.30	.00	.00	1.68	.62	--	1.38	--	.72	
Dec.	1.07	.00	.89	.32	.00	.94	.00	.99	.00	.34	.46	--	--	.35	.00	.00	.46	.00	--	.01	--	.16	
Annual	8.36	.79	6.89	4.31	1.67	5.91	5.18	3.39	5.12	3.29	4.51	--	--	4.57	2.67	1.20	6.12	4.50	--	--	--	3.76	

1/ Average for 5-year period, 1954-58

Table 2. --Average monthly and annual temperatures for Beatty and Lathrop Wells, Nev. 1952-61.  
(from published records of the U. S. Weather Bureau)

Month	Beatty											Lathrop Wells											Average
	1952	1953	1954	1955	1956	1957	1958	1959	1960	1961	Average	1952	1953	1954	1955	1956	1957	1958	1959	1960	1961	Average	
Jan.	37.5	46.9	42.0	34.0	44.6	37.3	43.6	45.6	--	45.4	37.7	--	--	--	40.1	48.2	41.9	47.6	--	--	47.4	--	
Feb.	44.1	46.0	51.9	40.3	40.4	49.6	47.6	42.8	43.4	47.9	45.4	--	--	--	43.9	43.8	54.7	52.6	--	--	--	--	
March	45.1	50.7	47.7	49.4	51.0	51.8	45.4	53.4	54.7	51.7	50.1	--	--	--	53.2	54.9	56.3	50.8	--	60.5	--	--	
Apr.	58.9	57.6	63.6	54.2	57.0	56.9	54.6	62.5	61.5	60.3	58.7	--	--	--	58.0	60.1	60.0	62.3	--	63.6	--	--	
May	68.9	58.6	71.6	63.7	67.1	62.9	68.7	64.7	66.4	64.8	65.7	--	--	--	68.0	69.9	67.0	75.9	--	70.4	--	--	
June	71.9	73.2	75.1	--	77.4	78.5	72.5	78.4	79.5	78.7	75.8	--	--	--	76.7	80.6	82.5	79.4	--	83.6	--	--	
July	82.3	84.5	84.2	79.8	80.1	81.1	--	84.6	83.9	85.0	82.8	--	--	89.0	83.7	83.6	82.8	83.2	--	88.3	--	--	
Aug.	81.8	78.1	78.0	82.7	77.3	78.5	--	78.3	80.5	80.7	79.5	--	--	82.5	86.9	80.5	--	86.4	--	83.2	--	--	
Sept.	74.9	75.6	--	74.0	75.1	72.5	--	71.0	76.2	68.9	73.5	--	--	78.2	78.5	80.9	--	77.8	--	--	--	--	
Oct.	67.5	60.4	62.8	64.8	59.1	57.4	--	64.3	61.7	61.1	62.1	--	--	67.8	69.5	64.2	--	--	--	--	--	--	
Nov.	46.7	50.9	53.5	49.4	50.8	46.0	52.0	52.2	50.2	47.3	49.9	--	--	58.5	--	53.9	48.6	--	--	52.2	--	--	
Dec.	40.9	42.4	40.1	42.5	45.0	44.2	50.3	45.6	45.1	41.9	43.8	--	--	44.8	--	48.3	47.1	--	--	45.7	--	--	
Annual	60.0	60.4	60.9	57.7	60.4	59.7	54.3	61.9	63.9	61.1	60.0	--	--	--	--	64.1	--	--	--	--	--	--	

1/ Average not indicated due to incomplete record.

The following evaporation figures, in inches, are from the Weather Bureau's 1961 Annual Climatological Summary for Nevada

BOULDER CITY, NEVADA												
Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.	Year
3.47	4.97	7.07	11.26	14.16	16.90	16.00	12.82	11.29	8.18	4.62	2.26	113.00

CALIENTE, NEVADA												
Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.	Year
--	--	--	7.19	9.40	12.07	11.06	7.90	6.68	4.07	--	--	--

The Amargosa Desert lies within the Las Vegas and Pahranaagat growing season zones as defined by Hardman and Mason (1949, p. 12). These growing seasons are based in terms of crop adaptability rather than in terms of frost-free periods. In the Las Vegas zone, according to Hardman and Mason (1949, p. 14), practically all temperate zone plants having a dormant period can be grown. The winter temperatures are too low for commercial production of winter vegetables. Five cuttings of alfalfa may be obtained. In the Pahranaagat zone, including the northern part of Amargosa Desert, occasional winter temperatures are too low for many of the tender plants grown in the Las Vegas zone. Three to four cuttings of alfalfa can be expected, and late maturing varieties of corn can be grown.

According to Houston (1950, p. 19), the average growing season for the Beatty area is 184 days (April 26 to October 27). The actual growing season would vary in different parts of the Amargosa Desert, but would tend to be longer toward the southern part of the area.

### GEOLOGY

The Amargosa Desert in large part is surrounded and probably underlain at depth by rocks ranging in age from Cambrian to Devonian. Most are carbonate rocks interbedded with lesser amounts of quartzite and argillite. Rocks of possible Precambrian age crop out in parts of and adjacent to the Funeral Mountains southwest of Big Dune and are mainly quartzite and argillite. The rocks in the area west of Fortymile Canyon to Bare Mountain are mostly tuff and lava flows of Tertiary age. Valley fill of Tertiary and Quaternary age underlies most of the central part of the desert. Valley fill includes alluvial-fan deposits and fresh-water or brackish-water playa deposits. Deposits of Quaternary age, including stream deposits, playa deposits, and dune sand, occur locally. Plate 1 shows the general distribution of the valley fill and the older bedrock in the Amargosa Desert and its tributary areas; plate 2 shows a more detailed distribution of rock types within the restricted area of this report.

## Rocks of Precambrian(?) and Paleozoic Age

Rocks of Precambrian(?) age were mapped in the eastern half of the Funeral Range by Noble and Wright (1958). Where examined, these rocks were mostly quartzite and argillite. Similar rocks north of the Nevada-California State line and west of Big Dune are included with Paleozoic clastic rocks (pl. 2). The largest of these outcrops, west of Big Dune, is mostly quartzite and the smaller ones are composed, about evenly, of sandstone, quartzite, and argillite.

The rocks of Paleozoic age surrounding the Amargosa Desert have been mapped as the Johnnie(?) Formation, Stirling(?) Quartzite, Carrara, Bonanza King, and Nopah Formations of Cambrian age; the Pogonip Group, Eureka Quartzite, and Ely Springs Dolomite of Ordovician age; undifferentiated dolomite of Silurian age, and the Nevada Formation and Devils Gate Limestone of Devonian age (Ball, 1907; Nolan, 1929, Hazard, 1937; Palmer and Hazzard, 1956; Johnson and Hibbard, 1957; Cornwall and Kleinhampl, 1961; Burchfiel, written communication, 1961). For the purpose of this report the Paleozoic rocks shown on plate 2 are grouped into carbonate and quartzite or argillite units without regard to formation designation. Cornwall and Kleinhampl (1961) described 11 Paleozoic formations in the Bare Mountain area having a combined thickness of more than 21,000 feet. The dominant rock types are limestone and dolomite. The limestone and dolomite are the principal aquifers and transmit ground water in contrast to the relatively impermeable quartzite and argillite.

## Volcanic Rocks of Tertiary and Quaternary Age

Rhyolitic and dacitic tuff, including ashfalls, welded tuff, and some flows, constitute most of the rocks of Tertiary age. They crop out in the Yucca Mountain area between Fortymile Canyon and Bare Mountain southeast of Beatty. Cornwall and Kleinhampl (1961) described about 6,000 feet of Tertiary and Quaternary volcanic rocks in the Bare Mountain area.

Undifferentiated Tertiary rocks in the southern part of the area probably are also volcanic in origin, although some of them have been deposited in water.

The younger volcanic rocks consist of several volcanic cones adjacent to Yucca Mountain, and are reported to range from Pliocene to Recent age by Cornwall and Kleinhampl (1961). Most of the cones are small and are composed of explosive debris. One, southeast of Yucca Mountain, produced a small flow of scoriaceous basalt.

## Valley Fill of Tertiary and Quaternary Age

Fresh- or brackish-water deposits occur throughout the basin of the Amargosa Desert but are most prominent south of Lathrop Wells. These deposits consist of several hundred feet of clay, silt, sand, gravel, and

freshwater limestone. Individual layers are of limited extent both vertically and horizontally. They also include a number of ash beds deposited in water. Basaltic debris was penetrated between 600 and 630 feet below land surface in well 175/49-4a1. The total thickness is unknown. Inspection of the cuttings indicate that the basaltic material was transported by ephemeral surface flow similar to that which occurs today.

Layers of caliche were reported in the well above the basalt and relatively thin beds of limestone(?) have been reported in a number of other well logs. The caliche and limestone(?) layers probably represent ancient soil zones.

Generally, marginal to the lake bed deposits discussed above and adjacent to the mountain areas are deposits of boulders, gravel, sand, and silt. Commonly these are alluvial-fan or wash deposits and in general are coarser grained than the lake-bed deposits. At depth, however, present data do not permit separation of these two units. They were deposited more or less contemporaneously and locally interfinger. However, in general, the areas shown as alluvial-fan deposits probably are underlain by a substantially higher proportion of sand and gravel than the areas shown as lake-bed deposits.

#### Alluvium of Quaternary Age

The areas mapped as Recent alluvium along the stream courses are, in general, thin bodies of unconsolidated sand and gravel from which the fines have been washed by the occasional storm runoff. The large area mapped as alluvium near Death Valley Junction is in the lower part of the basin and generally is finer grained than elsewhere; it grades laterally into the playa deposits. Recent playa deposits occur just north of Eagle Mountain and in the vicinity of the northwest quarter of T. 17 S., R. 51 E.

Windblown sand forms numerous dunes throughout the desert and is deposited against many of the Paleozoic and Tertiary outcrops, especially around the northern rim of the basin. Big Dune, covering about 4 square miles, is especially prominent in the northwestern part of the area. The proximity of Big Dune to a number of Precambrian(?) or Paleozoic outcrops leads to the hypothesis that the dune overlies a bedrock high. The principal mass of Big Dune reportedly migrates seasonally to some extent. The limited migration may well be controlled by orographic effects and seasonal shifts of wind direction.

#### Structure

The substantial structural deformation, including several episodes of thrust and high-angle faulting in the region, have involved the Paleozoic rocks and to a lesser extent the Tertiary volcanic rocks. Strong deformation is evident in most outcrops of Paleozoic rocks. Deformation and erosion of Paleozoic rocks make it difficult to project the Paleozoic rock surface beneath

the valley fill. Preliminary gravity data (Healey, written communication, 1962) in the Amargosa Desert suggest that the area may be divided into three more or less distinct topographic lows in the Paleozoic surface.

A continuous line of limestone outcrops, extending from Devils Hole (pl. 1) to the Paleozoic outcrops in Skeleton Hills along a gravity high, separates the playa area in T. 17 S., R. 51 E. from the area west of R. 51 E. Another line of outcrops, extending northward from the Funeral Mountains into the desert west of Big Dune, is alined with Paleozoic outcrops extending southward from Bare Mountain. This alinement coincides with a gravity high across the Amargosa Desert in this area. Major gravity lows occur beneath the playa in T. 17 S., R. 51 E., the Fortymile Canyon, and along the Amargosa River northwest of T. 14 S., R. 48 E.

The actual thickness of the valley fill in these three major subbasins is unknown, as the density of the volcanic tuff is similar to that of the valley fill. The gravity lows and highs roughly afford gravity differentiation between the valley fill and the Tertiary tuffs and the Paleozoic rocks. Thus, gravity data provide an approximate expression of the buried surface of the Paleozoic rocks. According to Healey (written communication, 1962), the depth to the Paleozoic rock surface may be on the order of 2,500 feet below land surface in the deeper part of the area southwest of Lathrop Wells.

### Geologic History

The geologic history of the area is at present poorly understood; therefore, the following outline of events is highly generalized and approximate only.

1. During most of the Paleozoic time the area was a part of the Cordilleran geosyncline, and substantial thicknesses of limestone, dolomite, shale, and sandstone were deposited. In the Specter Range during the Early Cambrian time, more than 10,000 feet of clastic sediments and thin beds of limestone were deposited in fluctuating marine and nonmarine environments. During the early Middle Cambrian, there was transition from older coarse clastic rocks to younger thick carbonate formations. More than 12,000 feet of carbonate rocks were deposited in the Specter Range from near the middle part of the Middle Cambrian through Late Devonian. Unconformities in the Paleozoic rocks indicate periods of emergence and erosion.

2. Near the end of the Paleozoic Era a period of emergence and extensive erosion occurred. This was followed by a period of oscillation between marine and continental conditions which culminated in complete emergence. Orogeny and erosion probably continued into Tertiary time. The dominant deformation was thrust and associated faulting which probably was preceded and accompanied by extensive block faulting.

3. Vast quantities of volcanic rocks, predominantly tuff, were deposited during the Tertiary and early Quaternary time. Basin and range

normal faults developed in late Tertiary and Quaternary time. The present topographic relief of the Amargosa Desert probably was formed largely during this interval.

4. Since the late Tertiary time erosion of the surrounding mountains and deposition in the valleys has taken place. Deposition has been principally in a combination of subaerial and lacustrine environments. Deposits range from clay to very coarse gravel and locally include spring and probably some evaporite deposits. Alluvial fans spread out from the highlands to an extensive playa that occupied about the southern half of the Amargosa Desert. Dissection of the playa probably began in the late Pleistocene.

Since the late Pleistocene, aeolian sand, alluvial detritus, and playa deposits have been deposited in topographically favorable areas in the Amargosa Desert.

#### Water-Bearing Properties of the Rocks

Rocks of Precambrian(?), Paleozoic, and Tertiary age are exposed in the mountains surrounding the Amargosa Desert. They include clastic, carbonate, and volcanic rocks which have been folded, faulted, and metamorphosed in varying degrees. As such, they are not good aquifers. However, locally developed secondary openings, due to faulting, folding, and weathering, have resulted in the development of a secondary permeability for these rocks. Fractures in the carbonate rocks may have been enlarged by solutions and locally increased the secondary permeability.

Secondary permeability in the carbonate rocks is the principal source of ground-water supply in the adjoining area to the northeast at the Nevada Test Site (Schoff, Sl. and Winograd, I. S. 1962, p. 111-113). Most of the discharge from the springs in Ash Meadows probably involves ground water moving through secondary openings in the Paleozoic rocks, especially the carbonate units. Water in Devils Hole fills solution developed caves. A sketch profile (P. M. Neely, written communication, January 9, 1955) prepared from information obtained by a group of divers from the National Speleological Society indicates that caverns and connecting conduits extend more than 130 feet below water level in Devils Hole and laterally for more than 300 feet. Further, a passage which is partly above the water-level altitude of Devils Hole contains air. It is likely also that several existing wells in the Amargosa Desert obtain at least parts of their water supply from carbonate rocks that locally have secondary permeability.

Fractures or solution openings locally may transmit substantial quantities of water, partial examples of which may be several of the springs in Ash Meadows. Further, although the total volume of water moving through the bedrock may be relatively large, the proportion of fractures to total volume of the carbonate rocks is relatively small. Therefore, the success of a well penetrating the bedrock is dependent upon the well bore tapping enough of the

secondary water-bearing zones to yield adequate amounts of water. At present, data are insufficient to determine the chances of intercepting a sufficient number of water-bearing zones in the bedrock underlying the valley fill.

The Tertiary and Quaternary volcanic rocks underlying the valley fill are composed primarily of ash-fall tuffs which is generally capable of transmitting only small amounts of water through fractures. The specific capacity of wells developed in the tuff generally is less than a few gallons per minute per foot of drawdown (Winograd and West, written communication, 1962) and therefore, generally the yield would be inadequate for an irrigation water supply. However, investigations at the Nevada Test Site indicate that a specific capacity of as much as 30 gallons a minute per foot of drawdown was obtained in one well developed in fractured welded tuff.

The valley fill principally includes Pleistocene lake deposits and alluvial-fan debris which have been eroded from the surrounding mountains. Overlying them are relatively thin surficial deposits of stream alluvium and aeolian sand. The alluvial-fan deposits of unknown thickness are unconsolidated or weakly indurated, water-lain rock debris ranging in size from boulders to clay. Saturated zones of well-sorted sand or gravel in the alluvial-fan deposits yield moderate to large amounts of water to wells. Of six wells in T. 16 S., R. 48 E., for which reported information is available, specific capacities ranged from 20 to 250 gallons a minute per foot of drawdown; for four of these wells specific capacities ranged from 40 to 110. The coarse deposits in the valley fill are the principal source of ground water in the valley.

The lake and playa deposits consist largely of silt and clay and some lenses of sand and fine pebble gravel. The lake deposits locally contain deposits of water-lain volcanic ash and fresh-water limestone. The sand and gravel strata are the best water-yielding zones in the lake and playa deposits.

The alluvium of Recent age along the courses of some intermittent streams is permeable but thin and generally above the water table, except locally in the southern part of the area. Aeolian sand deposits are found over much of the area. They are above the water table, but their relatively high permeability permits ready absorption of precipitation on their surfaces. The Recent playa deposits are fine-grained and saturated to within a few feet of land surface, but are of low permeability and yield water slowly to wells.

## WATER RESOURCES

### Surface Water

Surface water flows from Oasis Valley into the northern part of Amargosa Desert through the Amargosa Narrows near Beatty only following periods of heavy precipitation. According to Malmberg and Eakin (1962, p. 26) some ground water moves through the Amargosa Narrows as underflow in stream deposits. Part of the underflow is diverted by a ditch intercepting the ground-water table 6 to 10 feet below land surface.

Stream flow occurs at the southern end of Amargosa Desert, near Eagle Mountain, during part of the year. It is supplied largely from spring discharge in the Ash Meadows area and ground water in the vicinity of the playa during the winter when evapotranspiration is at a minimum. In April 1962 flow in the channel just south of Eagle Mountain was estimated to be about one-half a cubic foot per second. Flow may occur in any dry channels within the area for short periods after high-intensity precipitation.

Four small perennial ponds are within the Amargosa Desert. The three largest ponds are about 1 mile east of Ash Tree Spring and about 4 miles west of Crystal Spring (pl. 3). These three ponds are locally known as the "Clay Pits". All are the result of open pit clay mining in the early 1900's. The ponds are supplied principally by ground-water inflow. Water is discharged from the ponds by evapotranspiration. The balance between recharge to and discharge from the ponds is sufficiently close so that the ponds are maintained throughout the year.

The temperature of the water in the northernmost of the three ponds was 76°F. when measured on August 22, 1962, and the specific conductance was 1,200 micromhos; the southernmost pit had a water temperature of 70°F. when measured on June 16, 1962, and the specific conductance was 1,590 micromhos. The relatively high conductivity of the water probably results from a high evaporation rate causing an increase in concentration of salts. The differences in the water temperature probably are due to the difference in time of year when the two measurements were made.

The fourth pond, the smallest of the four, is in the northwest quarter of sec. 21, T. 17 S., R. 51 E. The pond is in a pit which is approximately 10 feet wide, 30 feet long, and 10 feet deep. The majority of the ponds contained water when observed in February (Winograd, written communication, 1962); however, by July all but one pond were completely dry. From February until mid-August the water level in this pond declined less than 1 foot.

### Ground Water

Occurrence and Movement: Within the principal area of this report ground water occurs in the valley fill and the underlying volcanic and Paleozoic carbonate rocks. Recharge to the ground-water system is supplied to some extent by precipitation within the surficial drainage area, including the tributaries of Oasis Valley, Crater Flat, Fortymile Canyon, Jackass Flats, Rock Valley, and the northern and western flanks of the Spring Mountains. Within the drainage area of Amargosa Desert, which covers about 2,600 square miles, recharge to the ground-water reservoir probably is derived largely from precipitation in the higher mountains. In addition to the limited amount of recharge from precipitation within the surficial drainage area, recharge to Amargosa Desert apparently is supplied by underflow through Paleozoic and possibly Tertiary rocks outside the surface drainage area. The principal source of this underflow may be from the higher parts of the Spring Mountains and to a

lesser extent from the area to the northeast.

Although the ground water in Amargosa Desert is part of a single large system, elements of that system are partially separated locally. This separation may be identified by variations of head or artesian pressure between some deep and shallow wells and between some wells and springs tapping alluvium and carbonate rocks.

The water-level contours shown on plate 3 indicate that ground water in the valley fill is moving southeastward along the axis of the Amargosa Desert from north of Big Dune toward Death Valley Junction. The tributary valleys, of which Fortymile Canyon is the principal one, supply some water. Movement from the east is shown in the vicinity of T. 17 S., R. 51 E., and from the springs issuing from the carbonate rocks along the east side of Ash Meadows. The artesian head in the carbonate rocks is higher than that to the west and north in the valley fill.

The springs and subsurface discharge from the carbonate rocks supplies water to the valley fill. The relatively steep water-level slope west of the springs in Ash Meadows closely parallels the general westward slope of the land surface. The closely spaced contours near the northwest corner of T. 18 S., R. 50 E., may reflect upward leakage which discharges from Ash Tree Spring and partial return flow to ground water in the valley fill.

The relatively high water levels in the eastern part of T. 16 S., R. 49 E., probably indicate upward leakage from the underlying carbonate rocks into the water-bearing zones supplying some of the deeper wells in that area.

The area around the southeast quarter of T. 16 S., R. 48 E. shows some irregularity of contours. Part of the irregularity is caused by differences of head in deep and shallow wells in the area, and part is caused by withdrawal of water for irrigation.

In summary, the water-level contours show the generalized features of the water surface of the ground-water reservoir. In detail, conditions are most complex, because of the merging of ground waters in two partially separated systems -- one in the valley fill and the other in the carbonate rocks. Each enters the area under a different head. The ground-water in the carbonate rocks generally is under higher head -- some discharges from springs and moves into the valley fill; some moves upward into the ground-water system in the valley fill where permeability of the deposits permits.

The slope of the water-level surface generally conforms to the slope of the land surface. However, the gradient of the water surface commonly is somewhat less than that of the land surface. In the southern part of the area north of Death Valley Junction the water-level gradient is about 12 feet per mile compared to the land-surface gradient of about 13 feet per mile -- a ratio of 12 to 13 (1 to 1.1); in the vicinity of Big Dune the ratio of gradients is about

1 to 1.25 and north of Lathrop Wells the ratio of gradients is about 1 to 7.5. The net effect of this general relationship is that the depth to water in wells increases northward. For example, at Death Valley Junction, the depth to water in well 25N/5+14c1 is about 2 feet; in the southwest corner of T. 16 S., R. 49 E., the depth to water is 40 to 50 feet; in the northern part of T. 16 S., R. 48 E., the depth to water is 125 to 135 feet; and near Lathrop Wells, the depth to water is on the order of 360 feet. Local variations occur and depend in part on the head in the water-bearing zone developed by a particular well.

Water-Level Fluctuations: Water-level fluctuations in general reflect changes in the amount of ground water in storage. An annual rise and fall of water-levels correspond to an annual cycle of changes in the relative quantities of recharge and discharge. The fluctuations are small in areas remote from areas of recharge or discharge, and the largest changes commonly are caused by pumping of ground water.

Water-level measurements made by the U.S. Geological Survey in the Amargosa Desert consist of random yearly measurements in the period 1952-62 (table 5). The longest record, that for well 16S/49-31b1, includes only 10 measurements. Water levels were measured principally in the eastern part of T. 16 S., R. 48 E., and the western tier of sections in T. 16 S., R. 49 E. Thus, the measurements are not representative of the entire area. Because the wells were measured only once a year in most cases, the seasonal effect of pumping and evapotranspiration is evident only in a general way.

Hydrographs for eight wells are shown in figure 2. The hydrographs are based on measurements made by personnel of the State Engineer's office.

Water levels taken between 1952 and 1957 generally show a relatively constant level; those recorded after 1957 commonly show a decline. In the area where periodic measurements were made only 12 out of about 42 wells were drilled prior to 1957. The water-level decline in the wells measured between 1957 and 1962 ranges from 0.1 foot to 6.1 feet over the 5-year period, and averages about 0.7 foot per year. Most of the decline may be due to pumping, but some may be due to deficient recharge.

Estimated Average Annual Recharge: Recharge to Amargosa Desert is derived in part from precipitation within the surficial drainage area shown on plate 1 and in part from ground-water underflow through bedrock from the east and northeast beyond the drainage area.

That part of the recharge occurring within the drainage area can be estimated as a percentage of the average annual precipitation. The average annual precipitation can be estimated from a generalized map showing the distribution of precipitation in Nevada (Hardman and Mason, 1949, p. 10). This map is divided into zones of precipitation, based largely upon records of precipitation, altitude, and types of vegetation. In general, precipitation increases

Table 5.--Records of water-level measurements in selected wells in the Amargosa Desert, Nevada-California.

Altitudes given are in feet above mean sea level for the land-surface datum at the well. Altitudes given in whole feet are interpolated from topographic maps. Altitudes given in feet and tenths were determined by plane table.  
 Measurements. All measurements were made by the U.S. Geological Survey. All measurements have been adjusted to depth below land surface. Well number. See page 4 for description of well numbering system.

Well number	Altitude (feet)	Date	Depth to water (feet)	Well number	Altitude (feet)	Date	Depth to water (feet)	Well number	Altitude (feet)	Date	Depth to water (feet)	Well number	Altitude (feet)	Date	Depth to water (feet)
13S/47-35a1	2,788	7-15-61	282.5	16S/48-25c1	2,326.6	5-7-52	64.2	16S/48-36d2	2,304	5-7-52	49.6	16S/49-19a1	2,362.8	2-14-55	94.4
		7-12-62	282.3			10-9-52	64.3			8-25-53	49.9			5-24-56	94.7
14S/48-16c1	2,608	5-24-56	252.8			8-25-53	63.8			3-15-54	49.8			8-28-57	94.8
		7-12-62	253.1			8-28-57	65.7			2-12-55	49.9			9-3-58	95.3
15S/50-18c5	2,656.1	5-8-52	346.7			9-3-58	64.8			8-28-57	49.9			9-15-59	95.9
		6-22-53	339.4			9-15-59	64.8			3-7-61	50.3			3-7-61	101.2
						7-9-62	67.1			3-7-61	52.6			7-9-62	99.0
16S/48-15a1	2,375.5	2-14-55	95.1	16S/48-26a1	2,336	5-7-52	71.2			7-5-62	54.1	16S/49-30b1	2,348.2	5-7-52	83.6
		5-23-56	96.6			10-9-52	71.3	16S/49-18d2	2,375.1	8-27-53	104.0			10-9-52	83.7
16S/48-15b1	2,373.3	2-14-55	95.7			8-25-53	71.3			2-12-55	103.1			3-16-54	83.7
		5-23-56	95.6			8-25-57	71.5			5-24-56	103.1			2-12-55	83.8
		7-14-62	97.2			9-3-58	71.9			8-28-57	103.2			8-28-57	84.6
16S/48-24	2,367	2-12-55	94.7			9-15-59	72.1			2-15-58	103.4			9-3-58	84.5
		2-14-55	94.7			3-7-61	73.7			9-4-58	103.7			9-15-59	Plugged
		5-24-56	94.4			7-4-62	75.7			9-15-59	104.7	16S/49-31b1	2,326.3	5-7-52	66.1
16S/48-24d1	2,357.1	2-14-55	88.8			5-7-52	62.9			3-7-61	104.4			10-9-52	66.3
		2-14-56	88.6			3-14-54	63.2			6-28-62	108.5			8-25-53	66.5
16S/48-25a1	2,343.4	5-7-52	79.2			2-12-55	63.1	16S/49-19a1	2,373.6	2-12-55	103.7			3-16-54	66.3
		10-9-52	79.3			8-28-57	67.4			5-24-56	103.7			2-12-55	66.4
		8-28-57	79.6			9-3-58	66.5			8-28-57	103.8			9-3-58	66.5
		9-3-58	80.3			3-7-61	68.0			9-15-59	104.8			9-15-59	67.1
		3-7-61	82.4			7-5-62	67.5			3-7-61	105.6			3-7-61	68.0
		7-9-62	84.5					16S/49-19b1	2,370.8	2-12-55	104.7			6-26-62	69.4
										12-6-55	101.7				
										5-24-56	99.7				
										8-28-57	99.9				
										9-3-58	100.5				
										3-7-61	102.0				
										7-9-62	106.0				

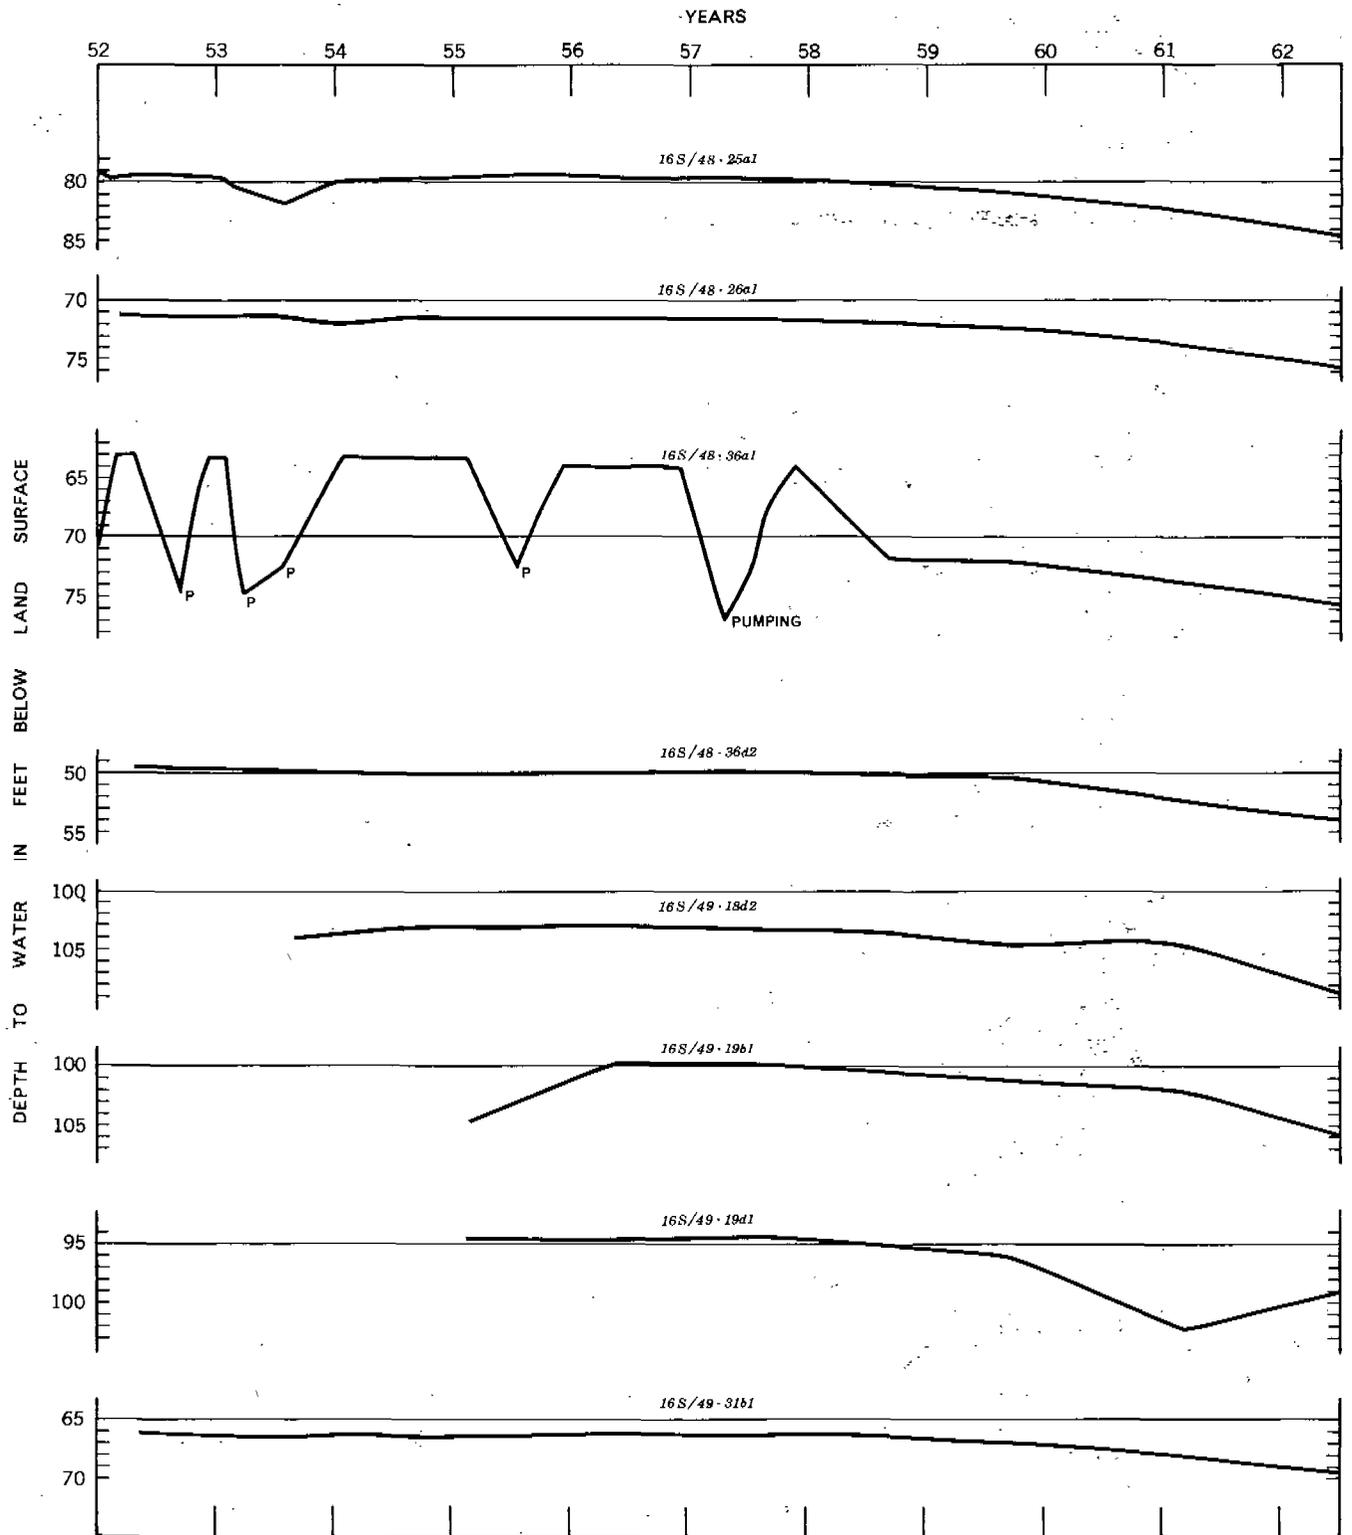


Figure 2. Hydrographs for 8 wells in Amargosa Desert.

with altitude, the greater amount commonly occurring on the highest mountains. A comparison of the precipitation map with more recent topographic maps (scale 1: 250, 000) indicates that the precipitation zones suggested by Hardman and Mason roughly coincide with altitude contours, although on a state-wide basis the precipitation zones rise somewhat in altitude in the southern one-third of the State. The map suggests that in the area lying below 5, 000 feet the average annual precipitation is less than 8 inches, at altitudes between 5, 000 and 6, 000 feet, it ranges from 8 to 12 inches; and from 6, 000 to 7, 000 feet, it ranges from 12 to 15 inches.

The total average annual precipitation on each zone is computed by multiplying the average precipitation for each zone by the area of that zone. Based on these computations, the average annual precipitation within the surficial drainage area totals 875, 000 acre-feet.

A very small percentage of precipitation that falls on the area recharges the ground-water reservoir. A method for crudely estimating the probable average annual recharge from precipitation has been developed by Eakin and others (1951, p. 79-81). Based on this method, the recharge is estimated as a percentage for each precipitation zone in the drainage area as follows: zone of less than 8 inches of precipitation, none; 8- to 12-inch zone, 1 percent; 12- to 15-inch zone, 7 percent; and 15- to 20-inch zone, 15 percent. The reliability of the estimates so obtained, of course, is related to the degree to which the assigned values approximate the actual precipitation, and the degree to which the assumed percentages represent the equivalent amount of the actual recharge. Neither of these factors is known precisely enough to assume a high degree of reliability for any one valley. However, experience suggests that the resulting estimates commonly are a reasonable approximation of average recharge.

Table 6 summarizes the computation of estimated recharge from precipitation within the surficial drainage area of Amargosa Desert, as shown on plate 1. The approximate recharge (column 5) for each zone is obtained by multiplying the figures in columns 2, 3, and 4. For example, for the 12- to 15-inch zone, the estimated recharge is: 9, 000 acres x 1.12 feet x .07 (7 percent) = 700 acre-feet. The total average annual recharge from precipitation so estimated is 1, 500 acre-feet, most of which is derived from precipitation in the Oasis Valley and Fortymile Canyon, which are tributary to Amargosa Desert.

Table 6. --Estimated average annual ground-water recharge from precipitation in Amargosa Desert and tributary areas

Precipitation zone (inches) (1)	Approximate area of zone (acres) (2)	Average annual precipitation (feet) (3)	Percent recharged (4)	Estimated recharge (feet) (2x3x4 ÷ 100) (5)
12-15	9,000	1.12	7	700
8-12	96,000	.83	1	800
8	1,570,000	.5	-	---
Recharge from precipitation				1,500

For Oasis Valley, Malmberg and Eakin (1962, p. 24) estimated that the average recharge from precipitation is about 250 acre-feet a year. Thus the estimated average recharge to Amargosa Desert below the Amargosa Narrows would be about 250 acre-feet a year less than the 1,500 acre-feet shown in table 6 for the entire drainage area, or roughly 1,200 acre-feet a year.

In considering the magnitude of recharge by underflow through bedrock from areas to the east and northeast beyond the surficial drainage divide, the validity of the method of estimating ground-water recharge from precipitation is handicapped by the uncertainty of the effective tributary area. There is a strong suggestion that a large part of the water discharged from the springs in Ash Meadows ultimately is derived from precipitation in the Spring Mountains (Loeltz, 1960, p. 1917-1918).

Using the same method discussed above, the average annual recharge to ground water from precipitation on the northern and western slopes of the Spring Mountains, an area which may contribute recharge to Amargosa Desert, is estimated to be about 3,500 acre-feet. If all of this recharge reaches the ground-water reservoir in Amargosa Desert, then the combined average recharge from precipitation within the surficial tributary drainage area and the northern and western slopes of Spring Mountains would be nearly 5,000 acre-feet.

There is a definite possibility that this estimate is low because the high proportion of permeable Paleozoic carbonate rocks in the Spring Mountains may result in an above-average percentage of precipitation being recharge. At present, however, no data are available on which to assign different values for percentage recharge for the several precipitation zones. The estimate also may be low because recharge to Amargosa Desert from the Spring Mountains may be

derived from a much larger area than that assumed for this computation. For example, Maxey (1948, p. 117) estimated that recharge from the southwestern slopes of Spring Mountains to Pahrump Valley is on the order of 23,000 acre-feet a year. Little water is consumed by phreatophytes in Pahrump Valley, except that supplied by water discharged from the springs. If these estimates are correct, about 13,000 acre-feet might be available from the Spring Mountains as underflow to the Ash Meadows spring system, which discharged about 17,000 acre-feet a year (p. 40).

If an average of 13,000 acre-feet a year actually were supplied to the Ash Meadow spring system from the Spring Mountains, then the remaining 4,000 acre-feet discharged from the springs may be derived by underflow through carbonate rocks from the northeast. Additionally, some water is discharged from the carbonate rock system by upward leakage into the valley fill, as suggested by the water-level contours on plate 3, about 7 miles south of Lathrop Wells. Thus, based on these assumptions the total estimated recharge to Amargosa Desert from precipitation within the surficial drainage area plus recharge to Paleozoic carbonate rocks from beyond the drainage area would be roughly 20,000 acre-feet a year.

The general known and inferred conditions relating to the direction of ground-water movement in Paleozoic carbonate rocks in the area north and northeast of Amargosa Desert and the favorable recharge conditions in the Spring Mountains seem to support the hypothesis that recharge from the Spring Mountains probably contributes most of the water discharged by the springs in Ash Meadows. Assuming this to be correct, the underflow in Paleozoic carbonate rocks from the area north and northeast of Amargosa Desert may be on the order of only a few thousand acre-feet a year. The difficulty of obtaining a satisfactory estimate of ground-water recharge for Amargosa Desert, as illustrated here, demonstrates the need for special investigations that would lead to improved methods and techniques of estimating recharge for use in Nevada. Such investigations have been suggested in previous reports of the Ground-Water Reconnaissance Series (Eakin, T. E., December 1960, p. 20; Eakin, T. E., January 1961, p. 29, 30).

#### Estimated Average Annual Discharge:

Natural Discharge:--Ground water is discharged from Amargosa Desert by the natural processes of transpiration of vegetation, evaporation from the soil and free-water surfaces, and to a lesser extent by stream flow and underflow from the Alkali Flat southeast of Death Valley Junction. If the total discharge by these processes could be determined precisely, a highly reliable estimate of ground-water discharge could be made. However, in the absence of precise data, annual rates of evapotranspiration by native vegetation using ground water can only be approximated from work done in other areas. For this report rates of use are adapted from studies of evapotranspiration of certain phreatophytes made by Lee (1912) and White (1932) in the Great Basin, Robinson (1958) in the western United States, and by Young and

Blaney (1942) in southern California. Rates of use were assigned on the basis of vegetative types, density, and depth to water table. The crude estimates of discharge by transpiration, evaporation, and underflow are summarized in table 7.

The principal area of phreatophytes is in T. 17 S., R. 50 E., and T. 18 S., R. 51 E., along the southeastern margin of the valley. Phreatophytes in this area obtain their water primarily from spring discharge and from some shallow ground water derived mainly from spring discharge. Other small areas of phreatophytes occur along the Amargosa River channel and in the unnamed playa in the northeastern part of the valley. These plants obtain their water supply from shallow ground water.

There are two main areas of evaporation within the valley. The largest extends from about 2 miles southwest of Ash Tree Spring to Eagle Mountain. The other smaller area is in the playa in the northwestern part of T. 17 S., R. 51 E.

Data are not available to make a direct estimate of the amount of ground-water discharged by underflow and surface flow through the gap at Eagle Mountain from Amargosa Desert. However, the general hydrogeologic conditions suggest that the magnitude of the outflow is on the order of 500 acre-feet a year.

The total natural discharge from Amargosa Desert is estimated to be about 24,000 acre-feet per year (table 7).

Table 7. -- Estimated average annual ground-water discharge by natural processes from the Amargosa Desert, Nevada-California

Process of Ground-water discharge	Area (acres)	Approximate discharge (acre-ft. per year)
<b>Native vegetation:</b>		
Principally mesquite, saltgrass, rabbit-brush in varying proportions; density moderate to low but locally moderate to heavy; depth to water ranges from a few to about 20 feet, averaging about 10 feet below land surface. Average annual use about 0.5 foot . . . . .	2,000	1,000
Principally meadow grass, mesquite, willow, salt grass, salt cedar in varying proportions; depth to water 0 to 5 feet; largely watered by discharge from springs and shallow ground water. Includes about 1,200 acres with an estimated average annual ground-water use of about 1.25 feet; and about 2,800 acres of marsh grasses and 200 acres of pasture grass and milo which normally is flooded by spring discharge. Average annual use about 3 feet . . . . .	4,200	10,500
<b>Evaporation:</b>		
Rate could approach potential evaporation rate from free-water system but is limited by amount supplied from ground-water reservoir through capillary openings; annual rate estimated at 1 foot . . . . .	12,000	12,000
<b>Outflow:</b>		
Ground-water and surface-water outflow from the valley at Eagle Mountain (estimate based on general hydrogeologic conditions at the narrows by Eagle Mountain). . . . .		500
		24,000
Estimated average annual discharge . . . . .		24,000

Ground-water discharge from Amargosa Desert may be estimated in another way, which affords a partial check on the discharge by evapotranspiration. The several springs in the Ash Meadows area are supplied largely by ground water moving through Paleozoic carbonate rocks as discussed previously. Much of the spring discharge flows overland and is consumed by transpiration of vegetation and is evaporated, but part returns to the ground-water reservoir and is then discharged by evapotranspiration, surface flow, or underflow from the Amargosa Desert. In either case the water issuing from the springs is finally discharged from the area. Thus, an estimate of the spring discharge provides a partial check on the total ground-water discharged from Amargosa Desert by natural processes.

Table 8 lists miscellaneous measurements for 24 springs in the Ash Meadows area. All were measured during the summer of 1962. The combined discharge of these springs in the summer of 1962 was about 10,300 gpm, or 23 cfs. Measurements made in the winter of 1953 on 17 of the larger of these springs indicated a total discharge of about 10,900 gpm, or somewhat more than 24 cfs. The measurements made during the winter of 1953 are roughly 5 percent larger than those made in the summer of 1962. The limited data suggest relatively uniform discharge from the springs as a group, although some seasonal variations are to be expected because of the effect of high rates of evapotranspiration during the summer months. Assuming that flow from the springs is relatively uniform, discharge of about 17,000 acre-feet a year is indicated.

Table 8. -- Records of Springs in the Amargosa Desert, Nevada-California

(See page 4 for description of numbering system.

Waterbearing unit: Lb, Lake bed; Tr, travertine.

m: Measured by U. S. Geological Survey; all others reported.)

No. for this report	Name of Spring	Water bearing unit	Yield (gpm)	Temp. (°F.)	Conduc-tivity	Date of Observations
17S/49-35dl.	Ash Tree	Lb	10 <sup>m</sup>	74	---	5-8-52
			9 <sup>m</sup>	--	350	7-31-62
17S/50-9al.	Fairbanks	Lb	2357	--	--	1910
			2043	-	--	7-14-23
			1756	-	--	8-16-46
			1661 <sup>m</sup>	82	--	2-1-53
			1702	-	--	6-?-61
			1715 <sup>m</sup>	81	650	7-23-62
17S/50-10cl.	Bell; Soda	Lb(?)	85 <sup>m</sup>	72	--	2-1-53
			87	-	--	6-?-61
			79 <sup>m</sup>	73	725	7-31-62
17S/50-15al.	Rogers	Lb	674	-	--	12-24-23
			717 <sup>m</sup>	84	--	2-1-53
			664	-	--	6-?-61
			736 <sup>m</sup>	82	650	7-29-62
17S/50-22al.	Longstreet	Lb	1257	-	--	3-27-21
			1239 <sup>m</sup>	80	--	2-3-53
			1271	-	--	6-?-61
			1042 <sup>m</sup>	82	640	7-29-62
17S-50-23bl	---	Lb	115 <sup>m</sup>	94	--	2-3-53
			193 <sup>m</sup>	94	650	7-23-62
17S/50-35al.	---	Lb	88 <sup>m</sup>	91	--	2-3-53
			140 <sup>m</sup>	92	640	7-24-62
17S/50-35bl.	---	Lb	17 <sup>m</sup>	83	620	7-23-62
17S/50-35dl.	---	Lb	25 <sup>m</sup>	90	---	1-31-53
			6 <sup>m</sup>	94.5	620	7-24-62

Table 8. --Records of Springs in the Amargosa Desert, Nevada-California.  
(continued)

No. for this report	Name of Spring	Water-bearing unit	Yield (gpm)	Temp. (°F)	Conductivity	Date of Observations
18S/50-3a1.	Crystal Pool	Lb	4266	-	--	6-?-61
			3071	-	--	4-1-50
			2815 <sup>m</sup>	89	--	1-31-53
			2981	-	--	6-?-61
			2824 <sup>m</sup>	91	650	7-29-62
18S/50-11d1.	Davis Ranch	Lb	718 <sup>m</sup>	74	--	2-2-53
			397 <sup>m</sup>	77	750	7-25-62
18S/50-11d2.	Davis Ranch	Lb	174 <sup>m</sup>	74	--	2-2-53
			5 <sup>m</sup>	-	--	7-25-62
18S/50-11d3.	Davis Ranch	Lb	38 <sup>m</sup>	70	--	2-2-53
			30 <sup>m</sup>	72	775	7-25-62
18S/50-12c1.	--	Lb	52 <sup>m</sup>	73	--	2-2-53
			11 <sup>m</sup>	80	725	7-25-62
18S/51-7d1.	King; Point of Rock	Tr	2128	-	--	7-17-43
			1247 <sup>m</sup>	89.5	--	1-31-53
			685	-	--	6-?-61
			1078 <sup>m</sup>	90	675	7-25-62
18S/51-7d2.	Indian Rock	Tr	134	-	--	3-31-50
			69 <sup>m</sup>	90	--	1-31-53
			119	-	--	6-?-61
			22 <sup>m</sup>	92	640	7-25-62
18S/51-7d3.	Indian Rock	Lb	343 <sup>m</sup>	90	--	1-31-53
			300	-	--	6-?-61
			379 <sup>m</sup>	91.5	645	7-26-62
18S/51-7d4.	---	Lb	19 <sup>m</sup>	93	650	7-26-62
18S/51-7d5.	---	Lb	2 <sup>m</sup>	93	650	7-26-62
18S/51-18b1.	Jack-rabbit; Roger's	Lb	498 <sup>m</sup>	82	--	2-1-53
			638	-	--	6-?-61
			587 <sup>m</sup>	-	675	7-27-62

Table 8. --Records of Springs in the Amargosa Desert, Nevada-California.  
(continued)

No. for this report	Name of Spring	Water-bearing unit	Yield (gpm)	Temp. (°F.)	Conductivity	Date of Observations
18S/51-19a1.	Big;	Lb	1122	-	--	1916
	Deep;		1055 <sup>m</sup>	82.5	--	2-2-53
	Ash		1078	-	--	6-?-61
	Meadows		1036 <sup>m</sup>	-	--	7-19-62
			1036 <sup>m</sup>	-	--	7-26-62
		-	83	700	8-22-62	
18S/51-29b1.	---	Lb	1 <sup>m</sup>	72	790	7-28-62
18S/51-30a1.	---	Lb	12 <sup>m</sup>	72	--	7-27-62
18S/51-30d1.	Last Chance	Lb	1 <sup>m</sup>	68	575	7-28-62

Water-level data used in preparation of the water-level contour map (pl. 3) further suggest that ground water from the Paleozoic carbonate rocks in part leaks upward into the ground-water reservoir in the valley fill. This is indicated, for example, by the closely spaced contours in the southeastern part of T. 16 S., R. 49 E., and by the high water levels in some of the wells immediately north in the same township. The amount of this upward leakage cannot be directly estimated, but may be several thousand acre-feet a year. Collectively then, ground-water discharge from the carbonate rocks is more than 17,000 acre-feet and may exceed 20,000, if upward leakage in the ground-water reservoir is included. This discharge accounts for most of the 24,000 acre-feet estimated as ground-water discharge by natural processes.

Because the Paleozoic carbonate rocks transmit ground water into Amargosa Desert from beyond the surficial drainage area, it may be assumed also that some ground water may leave Amargosa Desert by similar processes. Hunt and Robinson (1960, p. 273) hypothesized underflow from Amargosa Desert along a transverse fault in the Funeral Mountains to supply water to springs on the east side of Death Valley. If this is correct, and assuming that the total discharge of the springs on the east side of Death Valley, near Furnace Creek, were derived from Amargosa Desert, the quantity probably would be less than 3,000 acre-feet a year. However, the water-level contours (pl. 3) do not indicate westward movement to the west of California Highway 127.

Discharge from wells. --Ground-water discharge from wells is largely used for irrigation. Most of the water applied is used by crops or evaporated in the process of irrigation. Undoubtedly, however, some infiltrates to the ground-water reservoir.

Irrigation from wells has been carried on for many years, but the amount of water pumped was very small prior to about 1955. Since that time there has been an increasing amount pumped, although most of the wells drilled for irrigation are not yet in use. Eighteen wells were pumped, at least to a limited extent, for irrigation during the summer of 1962. However, no measurements were made of the seasonal pumpage. As an approximation, a rough computation may be made from the irrigation requirements of the crops grown and the acreages planted. An estimated 800 acres of alfalfa and milo maize and 600 acres of wheat and barley were irrigated during 1962.

Irrigation requirements, interpolated from Houston (1950, p. 21, 23, 24), would be about 3.4 feet for alfalfa, 1.8 feet for milo maize (assumed approximately equivalent to corn), and 1.4 feet for small grains. As the acreage of alfalfa and milo maize is not separated in the available information, it is further assumed that about 2.5 feet of water was the average requirement for the total acreage of alfalfa and milo maize. Based on these assumptions, the irrigation requirements in 1962 would have been about 3,000 acre-feet.

Pumpage for domestic or public supply by comparison was very small and probably did not exceed 100 acre-feet.

Perennial Yield: The perennial yield is the maximum amount of water that can be withdrawn from the ground-water system for an indefinite period of time without causing a permanent depletion of the stored water or causing a deterioration in the quality of the water. It is ultimately limited by the amount of water annually recharged to or discharged from the ground-water system through natural process plus that which might become available by artificial recharge and water returned to the ground-water system by infiltration of irrigation or waste water.

In an estimate of perennial yield, consideration should be given to the effects that ground-water development may have on the natural circulation in the ground-water system. The location of the development in the ground-water system may permit optimum utilization of available supply or at the other extreme may be ineffective in the utilization of the water supply. The location of the wells may favor improving the initial quality with time or may result in deterioration of quality under continued withdrawals. Development by wells may or may not induce recharge in addition to that received under natural conditions. Part of the water discharged by wells may re-enter the ground water reservoir by infiltration of excess irrigation or waste water and thus be available for re-use. Ground water discharged by wells eventually reduces the natural discharge. In practice, decreasing natural discharge by pumping is difficult, except when the wells are located where the water table can be lowered to a level that eliminates evapotranspiration in the natural area of discharge or underflow from the basin.

Ground-water underflow from a basin further complicates the final determination of perennial yield. The numerous pertinent factors are so complex that, in effect, specific determination of the perennial yield of a valley requires a very extensive investigation, based in part on data that can be obtained best only after there has been substantial development for a number of years.

The physical conditions in Amargosa Desert suggest that the estimate of discharge is the better basis on which to estimate perennial yield in the light of present information. Thus, the tentative perennial yield may be about 24,000 acre-feet a year. Of this, about 17,000 acre-feet can be obtained by full development of the springs in Ash Meadows. The remaining amount would be available for development by wells largely in the area northwest and northeast of the springs. Unused discharge from the springs that is returned to the ground-water reservoir downgradient from the springs toward Death Valley Junction could be withdrawn for use. However, the chemical quality generally becomes progressively poorer by this recycling and the suitability for the intended use should be evaluated carefully.

Storage: A large quantity of ground water is in transient storage in the valley fill in Amargosa Desert. The total volume in storage is many times the average annual recharge to the system and probably represents an accumulation over a period of several hundreds or thousands of years.

The total volume of valley fill that forms the principal ground-water reservoir is unknown because of the variation in the thickness of the valley fill. Accordingly the total volume of water that is stored in the main ground-water reservoir in Amargosa Desert cannot be computed from available information.

Some concept of the total amount of recoverable ground water in storage may be obtained, however, for the purpose of illustration, by estimating the amount of water that may be drained from the upper 100 feet of saturated deposits in a selected area and without regard to the effect on the surrounding area. A block of four townships, comprising about 92,000 acres and occupying the area in and adjacent to the principal concentration of wells, that is Tps. 15 and 16 S., and Rs. 48 and 49 E., is used for the example. If the drainable pore space in the upper part of the saturated valley fill is assumed to be about 15 percent, the volume of water that will drain from a given volume of saturated deposits by gravity is equal to approximately 0.15 of the volume of the dewatered material; that is, for each hundred cubic feet of saturated deposits approximately 15 cubic feet of water will be released by gravity drainage. Based on these values, approximately 1.4 million acre-feet of water would drain from storage with the lowering of the water table an average of 100 feet beneath the 92,000 acre area referred to above. This represents more than 50 times the estimated average annual ground-water discharge from Amargosa Desert.

The reliability of this estimate is contingent on the degree to which the assumed specific yield represents the average field specific yield. The determination of the specific yield of any large volume of unconsolidated or partly-consolidated sediments is a complex problem. Assuming that the specific yield of samples of each grain-size group, representing definite sedimentary units, can be determined precisely, there still remains the problem of determining the actual volume of these sedimentary units as they occur in the area of consideration. Many laboratory studies of specific yield for different sediment sizes have been made, and a wide range of values have been obtained for samples, particularly in the silt and clay sizes. The range in values tends to decrease with the larger sand and gravel sizes. Cohen (1961, p. 44) summarizes the specific yield of 209 sediment samples from the Humboldt River valley near Winnemucca, Nevada, as follows:

	Range of median diameters (millimeters)								All samples
	0.004-0.0625	0.0625-0.125	0.125-0.25	0.25-0.5	0.5-1	1-2	2-4	4-8	
Number of samples	121	15	17	23	6	19	7	1	209
Mean specific yield percent	19.1	21.4	25.9	25.9	22.2	20.8	17.4	17.4	20.7
Range of specific yield percent	1.0-34.1	2.5-36.5	7.0-35.4	7.2-39.5	10.7-35.3	4.6-36.2	4.9-27.4	--	1.0-39.5

Piper and other (1939, p. 121) list a range of 0.5 to 12.2 percent for the specific yield of materials composed of very fine sand, silt, and clay. They also obtained values of 34.1 and 34.9 percent for two samples of gravel and coarse sand.

In estimating the ground-water storage capacity in the San Joaquin Valley, California, Davis and others (1959), table 5, p. 209) assigned specific-yield values to groups of material as follows:

Gravel; sand and gravel; and related coarse gravelly deposits . . . . .	25 percent
Sand, medium- to coarse-grained, loose, well-sorted . . . . .	25
Fine sand; tight sand; tight gravel; and related deposits . . . . .	10
Silt; gravelly clay, sandy clay; sandstone; conglomerate; and related deposits . . .	5
Clay and related very fine-grained deposits . . . . .	3

The groups listed above were based on an analysis by Davis and others (1959, p. 202-206) of nearly 6,000 drillers' logs, core records of 64 test holes, and more than 1,000 electric logs of water wells and oil wells. Because of variation in usage and many individual expressions used by drillers, some 300 drillers' terms were grouped as expressing the equivalent of the groups of material listed above. The assignment of specific yield values to the groups was based on the results of previous studies in California, adapted to conditions in San Joaquin Valley (Davis and others, 1959, p. 206-211).

In the present study of Amargosa Desert, available time and data do not permit a similar analysis to the extent of that made for San Joaquin Valley. However, a simplified example may be used for illustration. This requires an assumption that the local drillers' terms for groups of material can be related to specific-yield values, although actually core samples and electric logs are not available to demonstrate an actual relationship. With this limitation, a reconnaissance examination of 57 drillers' logs for wells in Tps. 15 and 16 S., Rs. 48 and 49 E. suggests about 57 percent of material falls in the gravel or sand and gravel range, 15 percent in the sand and fine sand groups, and about 28 percent in the clay and silt groups, for the 100-foot interval below water level in the respective wells. Specific-yield values may be assumed as 25 percent for the gravel and sand and gravel, 15 percent for the sand group, on the basis of drillers' descriptions apparently indicating a specific yield characteristic closer to the fine sand group than sand group in the above listing, and 3 percent for the clay group. Multiplying these as follows.

$$\begin{array}{r}
 57 \times .25 = 14.25 \\
 15 \times .15 = 2.25 \\
 28 \times .03 = \underline{.84} \\
 \hline
 17.34 \text{ percent}
 \end{array}$$

Thus the average specific yield, for the upper 100 feet of saturated deposits, as represented by the 57 wells, is about 17 percent.

Even if the value of 17 percent actually represents the average specific yield of the upper 100 feet of saturated deposits penetrated by the 57 wells, the question still remains as to whether the value represents the average specific yield for the upper 100 feet of saturated deposits throughout the 4-township area in which the wells are located. In any case, the physical conditions of the area suggest that the average specific yield probably is not greater than 20 percent nor less than 10 percent. The amount of stored water in the 92,000-acre area in the upper 100 feet of saturated deposits for the three assumed specific-yield values is:

20 percent . . . .	1.8 million acre-feet
15 . . . . .	1.4 do
10 . . . . .	.9 do

It seems prudent, for the purposes of this reconnaissance report, to use the intermediate value of 15 percent for average specific yield and a value of 1.4 million acre-feet for the ground water in storage in the upper 100 feet of saturated deposits in the 4-township area as a reasonable illustration of the magnitude of that storage. When more data are available an improved estimate can be made subsequently.

This illustration of the magnitude of ground water in storage in a small part of Amargosa Desert indicates that a substantial reserve exists for maintaining a uniform annual supply through periods of deficient recharge. Moreover, even if a moderate depletion of stored water should occur during extended periods of drought, the basin can still be operated within the concept of the State ground-water law.

Chemical Quality: The chemical quality of the water in most ground-water systems in Nevada varies from place to place. In areas of recharge the dissolved-solids content normally is low. However, as the ground water moves through the system to the areas of discharge, it is in contact with rock materials which have different solubility. The extent to which water dissolves chemical constituents from the rock materials is governed largely by the solubility, volume, and distribution of the rock materials, the time the water is in contact with the rocks, and the temperature and pressure in the ground-water system.

For the present study, samples of water from 28 wells and springs in Amargosa Desert were collected and analyzed by the Geological Survey. The analyses are listed in table 9. The chemical character of the water as determined by the several analyses is shown diagrammatically on plate 4.

The chemical analyses identify the more important dissolved constituents and their concentrations in the water. On the basis of the chemical character indicated by the analyses, water can be classified as to its suitability for a variety of uses. For irrigation water some substances, such as calcium, magnesium, potassium, sulfate, and nitrate, are beneficial to plant growth, whereas others, such as sodium and chloride may be detrimental to both soil and vegetation. Minor constituents such as boron also may affect plant growth.

A method of classifying water for irrigation used by the U.S. Salinity Laboratory (1954) is based on the electrical conductivity, or specific conductance, of the water and the sodium-adsorption ratio (SAR). The specific conductance is an approximate measure of the concentration of the ionized constituents in the water, and the sodium-adsorption ratio is a measure of the adsorption of sodium by soil. Water of low conductivity and SAR value is more suitable for irrigation than water of high conductivity and SAR value.

By plotting the calculated value of the specific conductance at 25°C, and the sodium-adsorption ratio on a diagram shown in figure 3, water can be classed as to its suitability for irrigation. The Salinity Laboratory of the U.S. Department of Agriculture (1954, p. 79) gives the following classification of irrigation water with respect to the salinity and sodium hazards.

Table 9. --Chemical analyses, in parts per million, of water from selected wells and springs in the Amargosa Desert, Nevada-California (Analyses by Denver and Salt Lake City Laboratories, Quality of Water Branch, U.S. Geological Survey)

Location	Date of collection	Depth of well (feet)	Temperature (°F)	Total silica (SiO <sub>2</sub> ) (mg/l)	Aluminum (Al) (mg/l)	Iron (Fe) (mg/l)	Calcium (Ca) (mg/l)	Magnesium (Mg) (mg/l)	Sodium (Na) (mg/l)	Potassium (K) (mg/l)	Lithium (Li) (mg/l)	Bicarbonate (HCO <sub>3</sub> ) (mg/l)	Carbonate (CO <sub>3</sub> ) (mg/l)	Sulfate (SO <sub>4</sub> ) (mg/l)	Chloride (Cl) (mg/l)	Fluoride (F) (mg/l)	Nitrate (NO <sub>3</sub> ) (mg/l)	Phosphate (PO <sub>4</sub> ) (mg/l)	Boron (B) (mg/l)	Dissolved solids (mg/l at 180°C)	Hardness as calcium carbonate (mg/l at 25°C)	Percent non-carbonate hardness	SAR	RSC	Irrigation class	Specific conductance (micro-mhos/cm at 25°C)	pH	Color		
13S/51-30d1	9-18-57	1,327	92	67	0.1	0.26	85.0	14.0	0.0	157	16.0	--	102	0	484	20.0	0.9	7.4	0.0	--	893	270	186	34	4.4	0.0	C3-S1	1,210	7.8	3
14S/50-6a1	4-25-58	887	78	26	.2	.52	9.6	1.9	--	46	5.2	--	121	0	24	7.0	1.8	.0	--	169	32	0	72	4.1	1.45	C2-S1	266	8.2	1	
15S/49-14a1	4-24-58	570	82	52	.1	.09	25	2.4	--	41	5.2	--	145	0	33	8.0	1.4	3.5	.0	--	233	72	0	53	2.25	.93	C2-S1	336	8.0	0
15S/50-18c1	5-8-52	395	--	36	--	1.50	16	2.4	--	119	4.2	--	166	0	124	25	1.9	6.5	--	.29	417	50	0	82	7.47	1.72	C2-S2	629	7.9	--
15S/50-18c5	6-26-59	360	75	45	.0	.67	21	2.9	5.2	103	6.0	--	162	0	122	18	1.4	6.9	.0	--	408	64	0	76	5.78	1.37	C3-S1	863	7.9	0
16S/48-15a1	5-24-56	150	--	76	--	.22	12	3.2	--	65	3.2	0	166	0	30	8.0	3.0	4.1	--	.09	--	43	0	--	4.43	1.86	C2-S1	381	7.7	5
16S/48-17a1	8-18-62	280	75	75	.0	.00	60	7.8	.6	157	12	.20	302	0	179	69	1.2	1.2	.0	.57	800	182	0	--	5.06	1.32	C3-S1	1,074	7.4	--
16S/48-23b1	8-19-62	330	75	74	.57	1.1	9.4	1.0	1.8	66	6.8	.06	156	0	27	8.8	2.0	3.1	.0	.15	294	30	0	--	5.32	1.93	C2-S1	346	7.3	--
16S/48-36a1	2-21-56	165	74	82	.2	.14	70	3.9	--	62	9.0	--	142	0	107	61	1.4	1.7	.0	--	489	190	74	40	2.13	.0	C2-S1	700	7.9	0
16S/48-36d1	8-18-62	407	--	74	.22	.03	40	8.6	.7	98	11	.10	278	0	43	29	2.8	7.8	.0	.28	506	137	0	--	3.14	1.83	C2-S1	670	7.6	--
16S/49-9c1	8-19-62	300	75	56	.30	.00	28	3.4	.9	46	7.6	.06	142	0	53	10	.7	3.3	.0	.16	310	85	0	--	2.17	.63	C2-S1	381	7.2	--
16S/49-33b1	8-18-62	325	76	34	.60	.03	50	17	1.0	106	12	.18	286	0	145	29	4.4	.5	.0	.42	545	196	0	--	3.38	.79	C3-S1	796	7.3	--
16S/50-7c1	8-18-62	200	--	31	.29	.88	51	18	1.2	103	13	.14	288	0	143	30	4.0	.7	.0	.36	581	203	0	--	3.13	.70	C3-S1	821	7.7	--
16S/53-4b1	7-10-62	1,933	92	21	.03	.03	47	21	.40	37	5.2	0	256	0	53	16	.9	1.2	.16	--	330	204	0	--	1.2	.12	C2-S1	544	7.1	--
17S/49-35d1 Ash tree Spring	5-8-52	--	74	80	--	.08	16	4.8	--	55	7.9	--	160	0	37	7.2	2.8	3.9	--	.29	293	60	0	63	3.35	1.43	C2-S1	370	7.9	--
17S/50-15a1	8-18-62	464	67	23	.12	.16	50	20	.8	67	9.2	.10	365	0	79	23	1.2	.9	.0	.28	447	209	0	--	2.02	.75	C2-S1	665	7.6	--
17S/50-29d1	8-18-62	470	67	67	.00	.10	2.8	2.9	7.7	250	15	.14	484	0	105	26	3.2	.0	.0	1.4	733	28	0	--	27.6	7.72	C3-S4	1,067	7.6	--
17S/50-36d1 Devils Hole	1-22-53	--	92	23	--	.04	51	21	--	66	7.2	--	311	0	79	22	1.6	.5	--	.38	423	214	0	39	2.08	.83	C2-S1	686	7.4	--
17S/51-1a1	1-10-61	135	73	18	.2	.00	39	20	--	69	10	--	350	0	53	6.0	.6	.0	.32	--	372	180	0	--	2.43	1.79	C2-S1	607	7.2	1
17S/52-8c1	4-27-58	--	82	18	.2	.00	34	22	--	61	7.2	--	274	0	63	21	1.1	.0	.0	--	362	176	0	42	2.14	.98	C2-S1	593	8.0	0
18S/50-5d1 Carson Slough	1-27-59	--	50	28	.2	.21	40	26	1.8	125	16	--	362	10	122	40	2	.0	.07	.68	566	207	0	54	4.05	2.12	C3-S1	937	8.5	0
18S/51-7c1 King Spring	2-28-49	--	89	23	--	.02	49	21	--	69	7.7	--	310	0	80	21	1.4	.4	--	.1	425	209	0	--	2.21	.91	C2-S1	680	7.2	--
18S/51-19a Big Spring	1-27-59	--	83	32	.0	.11	45	18	1.8	98	8.8	--	314	0	110	25	1.4	.3	.08	.51	468	186	0	52	3.5	1.88	C3-S1	780	7.7	0
18S/51-30a Bole Spring	7-27-62	--	72	33	.11	.03	38	19	.60	106	9.2	.17	306	0	113	27	1.0	1.0	.0	--	500	173	0	--	3.7	1.56	C3-S1	776	7.1	--
25N/5-14c1	8-29-52	146	--	31	--	.06	1.9	1.9	--	325	12	--	556	43	149	49	7.9	.2	--	1.3	874	12	0	96	37.9	9.57	C3-S4+	1,380	8.6	--
25N/6-18a1	8-18-62	27.5	67	64	.12	.10	4.8	3.3	.5	370	16	.30	542	0	256	102	3.2	.5	.0	2.8	1,119	26	0	--	31.6	8.37	C4-S4+	3,241	7.9	--
25N/6-20c1	8-18-62	8.1	68	28	.43	.03	1.2	1.4	4.2	1,060	88	.10	712	64	297	1,050	7.0	.2	.32	.2	2,891	223	0	--	123	13.6	C4-S4+	4,730	8.6	--
27N/4-27b2	8-18-62	300	72	72	.14	.10	58	19	.6	134	39	.14	438	0	107	32	3.6	--	.0	.4	640	--	0	--	3.90	2.73	C3-S1	943	7.8	--

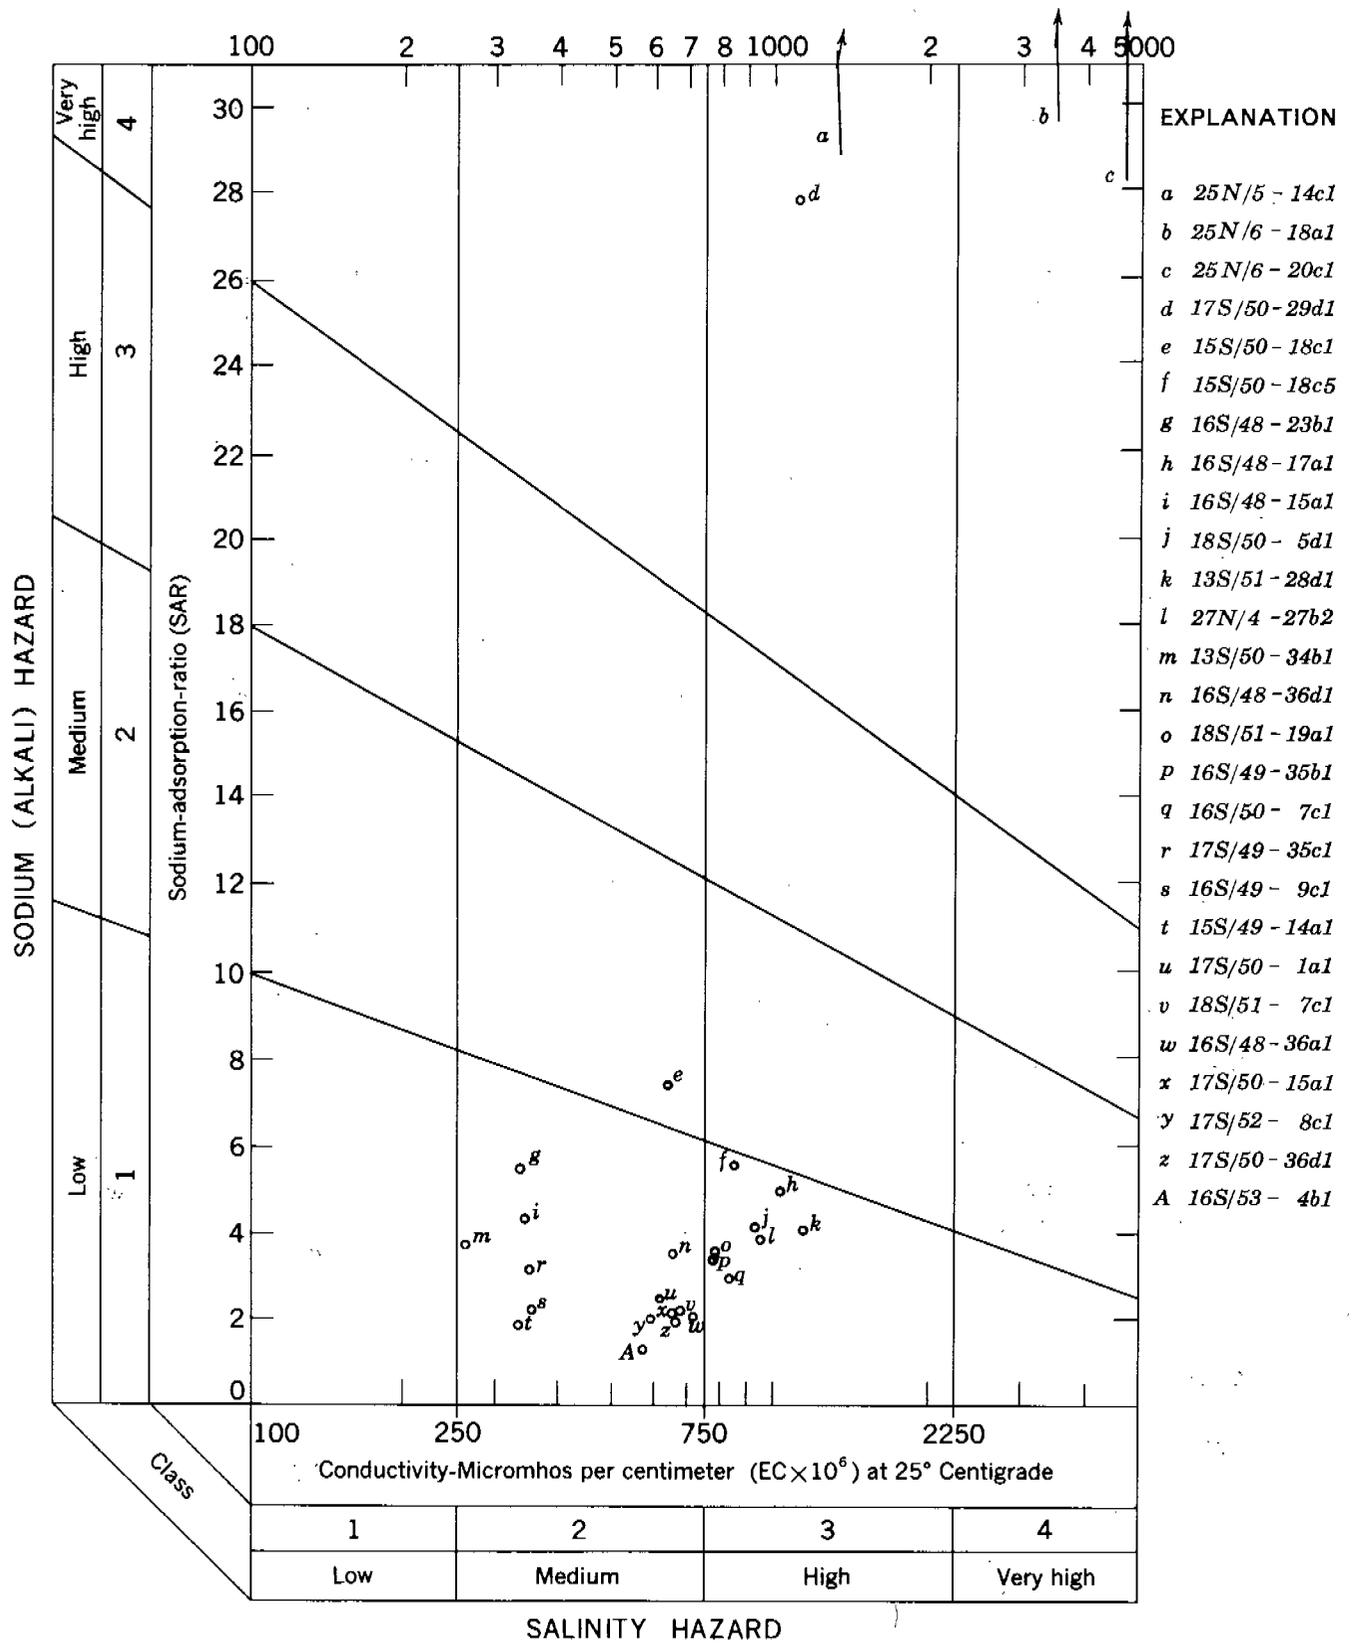


Figure 3. Diagram for the classification of irrigation waters. (after Wilcox, L. V., 1948).

#### Salinity hazard:

1. Low-salinity water (C1) can be used for irrigation with most crops on most soils with little likelihood that soil salinity will develop. Some leaching is required, but this occurs under normal irrigation practices, except in soils of extremely low permeability.
2. Medium-salinity water (C2) can be used if a moderate amount of leaching occurs. Plants with moderate salt tolerance can be grown in most cases without special practices for salinity control.
3. High-salinity water (C3) cannot be used on soils with restricted drainage. Even with adequate drainage, special management for salinity control may be required and plants with good salt tolerance should be selected.
4. Very high salinity water (C4) is not suitable for irrigation under ordinary conditions but may be used occasionally under very special circumstances.

#### Sodium hazard:

1. Low-sodium water (S1) can be used for irrigation on almost all soils with little danger of the development of harmful levels of exchangeable sodium. However, sodium-sensitive crops, such as stonefruit trees and avocados, may accumulate injurious concentrations of sodium.
2. Medium-sodium water (S2) will present an appreciable sodium hazard in fine-textured soils having high cation-exchange capacity, especially under low-leaching conditions; unless gypsum is present in the soil. This water may be used on coarse-textured or organic soils with good permeability.
3. High-sodium water (S3) may produce harmful levels of exchangeable sodium in most soils and will require special soil management--good drainage, high leaching, and organic matter additions.
4. Very high-sodium water (S4) is generally unsatisfactory for irrigation purposes, except under special circumstances.

Of the 28 analyses shown in table 9, 14 are classed as C2-S1; 9 as C3-S1; 1 as C3-S4; 1 as C3-S4+; 2 as C4-S4+; and 1 as C2-S2. Figure 3 shows the classification of the several samples. Although there is considerable local variation in the chemical quality, the poorest quality generally occurs in the water sampled in T. 25 N., Rs. 5 and 6 E., near the playa in the vicinity of Death Valley Junction. Water of relatively high salinity was also found in some samples between Lathrop Wells and Death Valley Junction.

Residual sodium carbonate is a measure of the hazard that may be involved in the use of high bicarbonate water. Using Eaton's (1950) concept of "residual sodium carbonate" (RSC) values (as described in U. S. Department of Agriculture handbook, no. 60, 1954) for the analyses of water from the 28 samples, the range is from zero for the sample from well 13S/51-28d1 to 13.6 for the sample from well 25N/6-20c1. The median value for all analyses was 1.44. According to Eaton's method of evaluation, values greater than 2.5 are not suitable for irrigation purposes. Waters having values of 1.25 to 2.5 are marginal and those containing less than 1.25 millequivalents per liter probably are safe. On this basis, 5 of the analyses indicate water unsuitable for irrigation; 12 of the analyses indicate water that may be of marginal quality; and 11 of the analyses indicate water that probably is safe for irrigation. RSC values for the individual analyses are listed in table 9.

The quantity of boron in solution is an additional factor that must be considered in classifying water for irrigation. In small quantities boron is necessary for proper plant nutrition, but in quantities of slightly more than optimum, boron is extremely toxic. Scofield (1936) proposed permissible limits of boron concentration for several classes of irrigation water according to the following tabulation.

Boron class	Sensitive crops (ppm)	Semi-tolerant crops (ppm)	Tolerant crops (ppm)
1	< 0.33	< 0.67	< 1.00
2	0.33 to 0.67	0.67 to 1.33	1.00 to 2.00
3	.67 to 1.00	1.33 to 2.00	2.00 to 3.00
4	1.00 to 1.25	2.00 to 2.50	3.00 to 3.75
5	> 1.25	> 2.50	> 3.75

Of nineteen analyses for boron, nine were less than 0.33 ppm, which is the lower limit for adverse affect on sensitive crops. The highest concentration of boron was 2.8 ppm in water from well 25N/6-18a1, in the southern part of Amargosa Desert at Death Valley Junction. The remaining nine analyses show boron concentrations ranging from 0.36 to 1.4 ppm. The median value for the nineteen analyses is 0.36 ppm of boron.

The foregoing discussion indicates that, although the chemical quality of ground water may be suitable generally for irrigation, water of median salinity is common and water of high salinity occurs locally. Boron commonly is found in relatively small concentration. However, the wide range in concentration in the available analyses suggests that concentration at harmful levels may be encountered locally within the area. This further suggests that the quality of water from individual wells should be checked for suitability with due regard to soil and drainage conditions on land on which that water is to be used and also to the tolerance of the proposed crops.

The communities at Lathrop Wells and Death Valley Junction together with possible increase in population in the area because of the development of irrigation and industry warrant consideration of the ground water in Amargosa Desert as to its suitability for domestic and public supply.

The presence of excessive concentrations of major constituents, such as magnesium, sodium, sulfate, and chloride, may make the water unsuitable for domestic use. Also small quantities of some substances, such as fluoride, nitrate, arsenic, iron, and manganese, in drinking water may have adverse physiological effects on humans or otherwise impart a quality unsuitable for domestic use. Therefore, it is essential to know the concentrations of the various constituents in solution in the water.

The range in concentration of several constituents, obtained from the analyses of water in Amargosa Desert and which are shown in table 9, are tabulated as follows:

Constituent	Range (in parts per million)		Public Health Standards (should not exceed)
	Low	High	
Calcium (Ca)	1.9	85	
Magnesium (Mg)	1.0	26	125
Sodium (Na)	41	1,060	
Potassium (K)	3.2	88	
Bicarbonate plus carbonate (HCO <sub>3</sub> + CO <sub>3</sub> )	102	778	
Sulfate (SO <sub>4</sub> )	24	484	250
Chloride (Cl)	6.0	1,050	250
Fluoride (F)	.6	7.9	a/
Nitrate (NO <sub>3</sub> )	.0	17	45

a/ 0.8 ppm for annual average of maximum daily air temperature 79.3 to 90.5°F, according to Federal Register, Mar. 6, 1962--Title 42, para. 72.205.

The permissible concentration of fluoride varies according to the average annual maximum daily air temperatures, according to recent information of the U. S. Public Health Service. Presumably this inverse relation reflects the fact that with higher temperature, more water will be consumed as will the total intake of fluoride of a given concentration. Thus, the Public Health Service decreases the permissible fluoride concentration in areas of higher annual average maximum daily air temperature. At Lathrop Wells the average Maximum temperature is 79.5°F, according to the U.S. Weather Bureau. For this temperature average, the U. S. Public Health Service shows a recommended upper control limit of 0.8 ppm of fluoride. They indicate that, when fluoride is naturally present in drinking water, the concentration should not average more than the recommended upper control limit.

The Public Health Service further recommends that average fluoride concentration more than twice the recommended optimum control limit, (in this case 0.7); that is, more than 1.4 ppm would be grounds for rejection of the water supply. Of the 28 analyses for fluoride, 26 have concentrations greater than 0.7 ppm, 14 have concentrations of more than 1.4 ppm, and 10 have concentrations of 2.8 ppm or more. The concentration of fluoride for the individual analyses is listed in table 9. Plate 4 shows fluoride concentrations diagrammatically.

Too much fluoride in water used for drinking purposes commonly results in dental fluorosis and discoloration in the teeth of children. A recent dental examination of school children in Beatty by officers of the Nevada

Department of Health showed that 19 out of 20 children who lived in Beatty since birth were affected with dental fluorosis (W. White, Director, Nevada Bur. Environmental Health, oral communication, 1962). The fluoride content of the municipal water supply for Beatty apparently averages about 4 ppm. This probably is an extreme example to apply to much of the area of Amargosa Desert where fluoride concentration generally is less than 2 ppm. Even so, problems of dental fluorosis would be expected to some extent. It is obvious then that fluoride concentration should be checked where ground water is to be used regularly for public supply.

For the other constituents, the concentration of sulfate exceeds Public Health Service recommended limits in water from wells 13S/51-30d1, 25N/6-18a1, 25N/6-20c1, and of chloride in well 25N/6-20c1. Throughout the main area of well development the analyses indicate that the constituents, other than fluoride, are below the limit recommended by Public Health Service.

#### Development:

Historical: Ground water in Amargosa Desert was used by the Indians to some extent before the white man came into the region. The big springs issuing from the Ash Meadows area undoubtedly attracted their attention because of the vegetative growth maintained by the water flowing from the springs. Subsequently prospectors and travelers passing through the Amargosa Desert also relied on these springs for water supply.

Mendenhall (1909, p. 36, 37) states that the Franklin well (26N/5-5b1) was dug by Mr. Franklin in 1852 to supply water for parties surveying the boundary line between California and Nevada. Later other wells were dug or drilled along main travel routes between mining towns and along the alignments of the Tonopah and Tidewater and the Las Vegas and Tonopah railroads now abandoned. The T and T ranch in sec. 25, T. 16 S., R. 48 E., was developed in about 1917 to produce crops, irrigated by wells, apparently for the market created by mining in Bullfrog, Rhyolite, and Beatty. The drilling of well 16S/48-36a1 and application to appropriate ground water for irrigation by the Tonopah and Tidewater Railroad Company in 1917 probably marks the beginning of irrigation from wells in the Amargosa Desert.

Present: Irrigation from wells remained at a very modest scale until recent years. Of the wells for which the year of completion is shown in table 3, 4 were drilled prior to 1950, another 4 during the period of 1951-54, 39 during the period 1955-58, and 66 during the period 1959 to September 1962. Although this represents only 113 wells out of the 162 listed in table 3, it does indicate the rapid expansion of drilling in recent years. Of the total of 162 wells listed in table 3, 90 are reported to be for irrigation use, 49 are unused or dry, 8 are test or observation wells, 8 are used for public supply, 5 for domestic use, 1 for stock use, and 1 for industry.

During the summer of 1962, 18 wells were pumped for irrigation. Most of the remaining wells intended for irrigation are not yet in operation. Installation of pumping equipment may have been delayed in anticipation that electric

power will soon be available. Several wells provide water for public supply, principally at Lathrop Wells and Death Valley Junction. The springs in Ash Meadows are used principally to supply water to native pasture.

Potential: The potential for development of ground water in Amargosa Desert is limited by quantity and chemical quality. Under the concept of perennial yield, development would be limited to a quantity that is about equivalent to the estimated average natural discharge of 24,000 acre-feet a year from the ground-water system.

The present area of well development (Tps. 16 and 17 S., Rs. 48 and 49 E.) is several miles northwest of the area of spring discharge in Ash Meadows, where 17,000 of the 24,000 acre-feet of natural discharge occurs each year. Whether pumping in the present area of well development from the valley would ever materially affect, or intercept, the spring discharge from the carbonate rocks cannot be evaluated at this time. Thus, pumping from the valley fill might be limited to somewhat less than the 7,000 acre-feet supplied by underflow from the northwestern part of the Amargosa Desert, from Fortymile Canyon area and by upward leakage from the carbonate rocks south of Lathrop Wells.

The present discharge of the springs in Ash Meadows largely supports pasture or native vegetation during the growing season, but wastes during the remainder of the year. Thus, only a small part of the average annual discharge of these springs is being utilized. Moreover, it is evident that there is a potential for a higher beneficial use of the water; that is, changes of use probably could be achieved to result in greater economic return on a year-around basis. For example, collection works and distribution systems could be installed to permit fuller control of the water for high-valued crops either in the area west and southwest of the springs or in areas where soil and drainage conditions may be better.

In many ground-water basins outside Nevada where large quantities of ground water in storage are known to exist, the "mining" of ground water -- that is, withdrawing water for many years at a rate much in excess of the average annual natural recharge or discharge--has been considered or actually has been done. Uncontrolled pumping of ground water often has resulted in overdevelopment with the consequent continued lowering of water levels and depletion of stored water. In some areas lowering of water levels has amounted to several hundred feet over a period of time. Overdevelopment commonly has resulted in much economic benefit and may, under the right conditions, permit raising the economic level of an area to a point where it can support the cost of importation of needed water supplies, where such exist, when the cost of obtaining ground water from the local area becomes too great. However, if no sources are available for importation, the overdevelopment of ground water implicitly indicates that at some time in the future it will no longer be economically feasible to obtain water. One principal problem is the difficulty of predicting the economical cost limit of withdrawing ground water. The time may be extended, if under actual conditions of withdrawal, more water is available than can be estimated, if greater efficiency of

water use is achieved with time, or if changes in use result in greater economic benefit. The time may be shortened by the reverse of the above conditions, or by a severe recession of the economy for any of several reasons. It should be reemphasized that in Nevada, present ground-water laws are based on the concept that development should not exceed the perennial yield.

Planned overdevelopment has been used in Utah and New Mexico to achieve some of the additional economic benefits possible for limited periods of time. Planned overdevelopment is discussed herein only with respect to some of the physical problems relating to the occurrence, movement and quality of ground water to aid in obtaining a fuller understanding of the results in the Amargosa Desert. It is intended neither to support nor negate the possible use of such methods.

The physical process of planned overdevelopment of ground water involves withdrawal at a rate greater than can be supplied by natural recharge for a specified period of time. If the area of development is properly located in the ground-water system, the lowering of water levels will result in a diversion of most of the recharge into the area of development and permit at least a one-time beneficial use of the stored water to a reasonable depth before it can be discharged by natural processes. It further permits beneficial use of a limited amount of the stored water within the area influenced by ground-water withdrawals. For the purpose of illustration, we may refer to the four-township area of present development, previously discussed in the section on storage, where water levels in 1962 were 50 to 100 feet below land surface (table 3). After a several-year period of large withdrawals water levels would be lowered sufficiently to intercept most of the inflow moving in the valley fill from the north and northwest and upward from the underlying Paleozoic carbonate rocks.

The magnitude of the annual pumpage required to lower water levels 100 feet beneath this 92,000-acre area alone can be computed by the equations:

$$\text{Pumpage} = \frac{\text{Stored water}}{\text{years}} + \text{annual recharge}$$

or

$$\text{Pumpage} = \frac{1.4 \text{ million acre-feet}}{\text{years}} + < 7,000 \text{ acre-feet}$$

For example, if the period of planned overdevelopment were 25 years, pumpage could be at least 60,000 acre-feet per year. Of course if the lateral storage depletion were included, as it would be under actual conditions, annual pumpage could be somewhat larger.

It is evident that with a known volume of water in storage within a definable area the time a given rate of withdrawal could be maintained with a given lowering of water levels could be reasonably forecast. The accuracy of such forecasting is dependent on having reliable geologic and hydrologic data in the area of concern. It is evident too that the problems of administration would be many and difficult. Sound administration of a planned overdevelopment

requires full and reliable data of the physical environment in addition to the necessary legal authority and the proper understanding and full support of the individuals and groups directly involved.

### CONCLUSIONS

Ground-water development in the Lathrop Wells-Death Valley Junction area of Amargosa Desert is expanding rapidly. More than 100 wells now have been drilled for irrigation. The principal concentration of wells is in T. 16 S., Rs. 48 and 49 E., and T. 17 S., R. 49 E., for which records of 106 wells were obtained in this investigation. However, during the summer of 1962 only 18 wells were reported to have been pumped for irrigation. Principal development by wells has come from sand and gravel zones in the valley fill.

Ground water in Amargosa Desert is recharged in part by infiltration of precipitation within the tributary drainage area of about 2,600 square miles, but most is supplied by underflow from beyond the tributary through Paleozoic carbonate rocks. Thus, most of the 17,000 acre-foot discharge from springs in Ash Meadows is considered to be supplied largely from ground-water recharge in the Spring Mountains. A much smaller quantity, perhaps on the order of a few thousand acre-feet a year, is supplied to the ground-water reservoir in Amargosa Desert by underflow through Paleozoic carbonate rocks from north and northeast beyond the surficial tributary drainage area.

The average annual ground-water discharge from Amargosa Desert by evapotranspiration and outflow is estimated to be on the order of 24,000 acre-feet. Of this amount, about 17,000 acre-feet is available on a perennial basis from the springs in Ash Meadows. Most of the remainder is available to wells in the valley fill northwest and northeast of the springs.

As an illustration of the magnitude of ground water in storage in Amargosa Desert, about 1.4 million acre-feet was estimated to be in storage in the upper 100 feet of saturated valley fill in a 92,000 acre area, roughly four townships, around the principal area of development. A simplified example of planned overdevelopment of ground water suggests that pumpage at the rate of 60,000 acre-feet a year probably would result in a lowering of water levels an average of 100 feet in this four-township area in about 25 years. Under the present State ground-water law, however, ground-water withdrawals are limited to the perennial yield of the ground-water basin.

## PROPOSALS FOR ADDITIONAL GROUND-WATER STUDIES

In compliance with the request of Hugh A. Shamberger, Director, Department of Conservation and Natural Resources, State of Nevada, suggestions for special studies are listed below to obtain needed basic data and a better understanding of the factors that influence or control ground water in Amargosa Desert and similar areas in Nevada. These proposed studies are separate from the usual areal investigations, which commonly are needed after the development of ground water in a given area become substantial.

1. Investigation of the interrelation of the ground water in the Paleozoic carbonate rocks and in the valley fill in the area around the springs in Ash Meadows. The investigation should seek to define the distribution of the difference in head between ground water in the valley fill and the carbonate rocks, the area or areas in which subsurface leakage occurs from the carbonate rocks to the valley fill, and the magnitude of subsurface leakage. The investigation requires additional study of available data and of wells that may be drilled in the future. Further, several test holes will be needed to obtain detailed subsurface data. Additional detailed gravity data also will be needed to supplement available data for better control and definition of the Paleozoic bedrock surface in selected areas.

2. An investigation of physical parameters to develop improved estimates of ground water in storage. This will involve analysis and correlation of drillers' logs and terms with electric or gamma logs, samples or cores, and further study of the geology and hydrology with respect to the distribution and range of storage and transmissibility coefficients in the area. The study should include the application of techniques for analyzing the effects of development on the ground-water system. For this purpose the possible use of an electric analog model warrants serious consideration. Potentially the electric analog model will be of much value in demonstrating the character of various ground-water systems and should be a valuable tool to aid in the management of ground-water resources in Nevada.

## REFERENCES CITED

- Ball, S. H., 1907, A geologic reconnaissance in southwestern Nevada and eastern California: U.S. Geol. Survey Bull. 308, 218 p.
- Burchfiel, B. C., 1961, Structure and stratigraphy of the Specter Range Quadrangle, Nye County, Nev.: Doctoral Thesis, Yale University.
- Cohen, Philip, 1961, Specific yield of sediments of the Humboldt River Valley, Humboldt County, Nevada: U.S. Geol. Survey Prof. Paper 424-C.
- Cornwall, H. R., and Kleinhampl, F. J., 1961 Geology of the Bare Mountain Quadrangle, Nevada: U.S. Geol. Survey Geol. Quad. Map GQ-157.
- Davis, G. H., and others, 1959, Ground-water conditions and storage capacity in the San Joaquin Valley, California: U.S. Geol. Survey Water-Supply Paper 1469, 287 p., 29 pls., 8 figs.
- Eakin, Thomas E. and others, 1951, Contributions to the hydrology of eastern Nevada: Nevada State Engineer, Water Resources Bull. 12, 171 p.
- Eakin, Thomas E., 1960, Ground-water appraisal of Newark Valley, Nevada: Nevada Dept. Conserv. Nat. Resources, Ground-Water Resources-Reconnaissance Ser. Rept. 1, 33 p.
- Eakin, Thomas E., 1961, Ground-water appraisal of Pine Valley, Nevada: Nevada Dept. Conserv. Nat. Resources, Ground-Water Resources-Reconnaissance Ser. Rept. 2, 41 p.
- Hardman, George, and Mason, Howard G., 1949, Irrigated lands in Nevada: Nevada Univ. Agr. Expt. Sta. Bull. 183, 57 p.
- Hazzard, J. C., 1937, Paleozoic section in the Nopah and Resting Springs Mountains, Inyo County, Calif.: Calif. Jour. Mines and Geol., no. 33, p. 273-339.
- Houston, Clyde, 1950, Consumptive use of irrigation water by crops in Nevada: Nevada Univ. Agr. Expt. Sta. and Div. Irrigation and Water Conserv., Soil Conserv. Service, U.S. Dept. Agriculture Bull. 185, 27 p.
- Jennings, C. W., Compiler, 1958, Geologic map of California, Death Valley sheet: California Dept. Nat. Resources Div. Mines.
- Johnson, M. S. and Hibbard, D. E., 1957, Geology of Atomic Energy Commission, Nevada Proving Grounds Area, Nevada: U.S. Geol. Survey Bull. no. 1021 (K), p. 333-384, plates 32-33; fig. 57.

- Lee, C. H., 1912, An intensive study of the water resources of a part of Owens Valley, California: U.S. Geol. Survey Water-Supply Paper 294, 135 p.
- Loeltz, O. J., 1960, Source of water issuing from springs in Ash Meadows Valley, Nye County, Nevada: Geol. Soc. America Bull., v. 71, p. 1917 (Abst.)
- Malmberg, G. T. and Eakin, T. E., Ground-water appraisal of Sarcobatus Flat and Oasis Valley, Nye and Esmeralda Counties, Nevada: Nevada Dept. Conserv. Nat. Resources, Ground-Water Resources, Reconnaissance Ser. Rept. 10, 39 p.
- Maxey, G. B. and Jameson, G. H., 1948, Geology and Water Resources of Las Vegas, Pahrump and Indian Spring Valleys, Clark and Nye Counties, Nevada State Engineer Water Resources Bull. no. 5, 128 p.
- Mendenhall, Walter C., 1909, Some desert watering places in southeastern California and southwestern Nevada: U.S. Geol. Survey Water-Supply Paper 224, 98 pp., 4 pls.
- Noble, L. F. and Wright, L. A., 1958, Geologic map of California: Death Valley sheet, California Dept. of Nat. Resources Div. Mines.
- Nolan, Thomas B., 1929, Notes on the stratigraphy and structure of the northwest portion of Spring Mountain: Am. Jour. Sci. 5th Ser., v. 17, p. 461-72.
- Palmer, A. R., and Hazzard, J. C., 1956, Age and correlation of Cornfield Springs and Bonanza King formations in southeastern California and southern Nevada: Am. Assoc. Petroleum Geologists Bull., v. 40, No. 10, p. 2494-2499.
- Piper, A. M., and others, 1939, Geology and ground-water hydrology of the Mokelumne area, California: U.S. Geol. Survey Water-Supply Paper 780, 230 p., 22 pls.
- Robinson, T. W., 1958, Phreatophytes: U.S. Geol. Survey Water-Supply Paper 1423, p. 1-84.
- Schoff, S. L. and Winograd, I. J., 1962, Potential aquifers in carbonate rocks, Nevada Test Site, Nevada: U.S. Geol. Survey Prof. Paper 450-C, p. 111-113.
- Scofield, C. S., 1936, The salinity of irrigation water: Smithsonian Inst. Ann. Rept., 1935, p. 275-287.
- U. S. Department of Agriculture, 1954, Diagnosis and improvement of saline and alkali soils: Agriculture handbook no. 60, 160 p.

- U. S. Department of Commerce, Climatic summary of the United States, Supplement for 1931 through 1952, part 11-12 Nevada: Weather Bureau, 27 p.
- U. S. Public Health Service, 1961, Report of the advisory Committee on revision of the Public Health Service, 1946 drinking water standards Jour. Am. Water Assoc., v. 53, No. 8, p. 935-945.
- U. S. Public Health Service, 1962, Drinking water standards: Federal Register, Mar. 6, p. 2152-2155.
- White, Walter N., 1932, A method of estimating ground-water supplies based on discharge by plants and evaporation from soil: U.S. Geol. Survey Water-Supply Paper 659-A, p. 1-165.
- Young, Arthur A., and Blaney, Harry F., 1942, Use of water by native vegetation: California Dept. Public Works, Div. Water Resources Bull. 50, 154 p.

Nevada Department of Conservation and Natural Resources

Previously Published Reports of the  
Ground-Water Resources Reconnaissance Series

Report No.

1. Ground-Water Appraisal of Newark Valley, White Pine Co., Nev.  
Dec. 1960 By Thomas E. Eakin
2. Ground-Water Appraisal of Pine Valley, Eureka and Elko Counties, Nev.  
Jan. 1961 By Thomas E. Eakin
3. Ground-Water Appraisal of Long Valley, White Pine and Elko Counties  
June 1961 By Thomas E. Eakin
4. Ground-Water Resources of Pine Forest Valley, Humboldt Co., Nevada.  
Jan. 1962 By William C. Sinclair
5. Ground-Water Appraisal of the Imlay Area, Humboldt River Basin,  
Pershing County, Nevada.  
Feb. 1962 By Thomas E. Eakin
6. Ground-Water Appraisal of Diamond Valley, Eureka and Elko Counties  
Feb. 1962 By Thomas E. Eakin
7. Ground-Water Resources of Desert Valley, Humboldt County, Nevada.  
April 1962 By William C. Sinclair
8. Ground-Water Appraisal of Independence Valley, Western Elko Co., Nev.  
May 1962 By Thomas E. Eakin
9. Ground-Water Appraisal of Gabbs Valley, Mineral and Nye Counties  
June 1962 By Thomas E. Eakin
10. Ground-Water Appraisal of Sarcobatus Flat and Oasis Valley, Nye Co.  
Oct. 1962 By Glenn T. Malmberg and  
Thomas E. Eakin
11. Ground-Water Resources of Hualapai Flat, Washoe, Pershing and  
Humboldt Counties, Nevada.  
Oct. 1962 By William C. Sinclair
12. Ground-Water Appraisal of Ralson and Stonecabin Valleys, Nye County  
Oct. 1962
13. Ground-Water Appraisal of Cave Valley in Lincoln and White Pine  
Counties, Nevada.  
1962 By Thomas E. Eakin

Table 3.--Record of selected wells in the Amargosa Desert, Nevada-California

Well number and location: See page 4 for description of numbering system.

Depth of well: m, measured by U.S.G.S.; other depths are reported.

Altitude: Land surface above mean sea level. Altitudes given in whole feet are interpolated from topographic maps. Altitudes given in feet and tenths were determined by plane table.

Measuring point: Above land surface: L, land surface; Tc, top of casing;

Ep, entry point; Dp, discharge pipe.

Water level: In feet and tenths if measured by U.S.G.S.; in feet only if reported.

Yield: m, measured by U.S.G.S.; other yields are reported.

Drawdown: m, measured by U.S.G.S.; other drawdowns are reported.

Status or use: Ir, irrigation; Dr, dry; P, public supply; Obs, observation;

D, domestic; E, exploration; U, unused; S, stock; Ind, industry.

Remarks: A, chemical analysis; Ar, radiochemical analysis; D1, drillers log,

Sp, cond., specific conductance in micromhos/centimeter at 25°C.

Well number and location	Owner	Year completed	Depth (feet)	Casing			Altitude (feet)	Meas. point Description	Height (feet)	Water level		Yield (gpm)	Draw-down (feet)	Temperature (°F)	Status or use	Remarks	
				Dia-meter (inches)	Depth (feet)	Perfor-ated zone (feet)				Above (+) or below land surface (feet)	Date						
135/47-35a1	Nuclear Engineering Co.	1961	575	8	573	453 to 493; 513 to 573	2788	Tc	.5	282.3	7-12-62	100	43	84	E	D1	
135/51-30d1	--	1957	1329	12 3/4	1327	1077 to 1097; 1244 to 1300	3443	Tc	3.0	1046	9-13-57	105	48	96	Ind	A	
145/47-24d1	W. Dale	--	484.1	14	--	--	2608	L	--	253.1	7-12-62	180	--	--	U	--	
145/48-32a1	Koosa's Station	--	177.8	42x42	10	--	2542	L	--	--	--	--	--	--	Dr	Depth to water rept. 208' in U.S.G.S. Bull. 308.	
145/50-6a1	--	1957	887	12 3/4	887	793 to 868	3128	Tc	3.0	734	10-31-57	200	--	78	P	A	
155/49-11c1	R. Washburn	1958	243.4	12	--	--	2679	Tc	0	--	--	--	--	--	Dr, U	D1; original depth 986'	
155/49-14a1	R. Washburn	1953	77.7	--	--	--	--	--	--	--	--	--	--	--	Dr, U	D1; A, original depth 90'	
155/49-22a1	J. Shaw	1953	570	14	380	70 to 188	2612.2	Tc	4.0	290.9	12-7-53	300	--	80	Ir	D1; Sp. cond. 276	
155/49-22d1	R. Washburn	1958	486.8	14-10 3/4	500	0 to 500	2572	Tc	.4	255.8	7-12-62	800	10	--	Ir	D1	
155/49-27d1	R. Washburn	1958	442	12 3/4	433	300 to 420	2540	Tc	--	229	10-18-58	--	--	--	Ir	D1	
155/50-18c1	L. Pereira	1952	395	8-6	395	335 to 395	2664	--	--	--	--	--	--	--	U	D1, A	
155/50-18c2	L. Pereira	1950	353	8	373	--	2665	Tc	.9	351.3	6-12-62	--	--	--	U	--	
155/50-18c3	L. Pereira	1955	507	10	507	380 to 507	2665	Tc	.8	358.8	6-12-62	--	--	--	P	D1	
155/50-18c4	B. Bossingham	1961	471	12	471	103.6-122.4 167.7-271.0 293.2-314.0 451.3-471.0	2664	--	--	333	5-20-61	--	--	--	U	D1	
155/50-18c5	Nevada Highway Department	--	360	--	--	--	2656.1	Tc	.3	339.1	6-22-53	--	--	--	P	A, Ar	
155/50-18c6	B. Whellock	1955	505	10	505	360 to 505	2655	Tc	1.8	365.6	6-12-62	--	--	--	P	D1	
165/48-2b1	--	1962	332	12	--	--	2423	Tc	1.8	135.9	7-2-62	--	--	--	Ir	--	
165/48-2d1	D. Heath	1961	409.6	14	422	212 to 422	2409.7	Tc	1.3	124.3	7-2-62	--	--	74	Ir	D1	
165/48-3a1	F. Keefe	1960	234.6	12 3/4	250	120 to 250	2412.3	Tc	0	127.4	7-2-62	650-900	30	72	Ir	D1	
165/48-4d1	E. Mankinen	1961	308	12 3/4	308	203 to 298	--	Ep	.4	108.6	7-2-62	1,900	20	--	Ir	D1	
165/48-5b1	F. Wooldridge	1960	250	12 3/4	250	130 to 250	2405.5	Tc	1.3	127.6	7-2-62	--	--	68	Ir	D1	
165/48-5d1	T. & T. Railroad	--	51.0	14	--	--	--	--	--	--	--	--	--	--	Dr	Original depth 179'	
165/48-8a1	E. Schultz	1962	272.6	12 3/4	315	189 to 315	2382	Tc	.8	109.2	7-2-62	--	--	--	Ir	D1	
165/48-8b1	C. DeFir, Sr.	1959	250	12	250	100 to 250	2384	Tc	.6	111.9	7-2-62	1,400	8-10	--	Ir	D1	
165/48-9b1	C. DeFir, Jr.	1959	242.0	12	250	100 to 250	--	Tc	.8	105.2	7-3-62	--	--	--	Ir	D1	
165/48-9c1	C. Caldwell	1958	350	14	347	105 to 347	2373.1	Tc	.4	100.4	7-3-62	1,150	--	--	Ir	D1	
165/48-9d1	D. Fadenrecht	1959	410	12	410	144 to 410	2385.3	Ep	.6	108.0	7-3-62	1,550	6	--	Ir	D1	
165/48-10a1	A. Mankinen	1961	320	12 3/4	320	150 to 320	--	Ep	.6	107.8	7-2-62	3,000	27	--	Ir	D1	
165/48-10b1	W. Monroe	1958	300	12 3/4	300	200 to 300	2397.8	Ep	.2	116.6	7-3-62	--	--	65	Ir	D1	
165/48-11c1	J. Pierce	1960	288.4	12 3/4	302	130 to 302	--	Tc	.4	112.3	7-4-62	--	--	72	Ir	D1	
165/48-13a1	P. Parker	1958	250	14	--	--	2386.1	Ep	.8	116.8	7-4-62	--	--	--	Ir	D1	
165/48-14b1	T. Gallagher	1955	315.2	12 3/4	349	146 to 158; 170 to 195 240 to 295	2381	Tc	2.0	102.7	7-4-62	--	--	--	Ir	D1	
165/48-14d1	P. Perry	1958	240	12	240	100 to 240	--	--	--	92	11-26-58	--	--	--	Ir	D1	
165/48-15a1	E. Mankinen	1954	156	14	150	--	2375.5	Tc	1.0	96.6	5-23-56	800	40	--	Ir	D1, A	
165/48-15b1	L. Denaby	1954	149	14	149	--	2373.3	Tc	1.0	97.2	7-4-62	700-800	--	--	Ir	D1	
165/48-16a1	E. Seibach	1958	250	12	250	--	2375	--	--	90	8-15-58	1100-1200	--	--	Ir	D1	
165/48-17a1	J. Overhalsner	1959	280	12	280	120 to 280	2370.3	Ep	.2	100.6	8-18-62	1200-1500	--	75	Ir	D1, A, Ar	
165/48-18b1	J. Bell	1961	361.1	16	380	140 to 218; 258 to 380	2363	Ep	.6	90.0	7-3-62	--	--	72	Ir	D1	
165/48-20d1	J. Downey	1961	366	16	264	119 to 255	2340.7	Dp	3.2	65.6	7-4-62	1500	38	72	Ir	D1	
165/48-23a1	H. Gillespie	1960	330	14	330	80 to 330	2358	--	--	84	4-60	1400	--	--	Ir	D1, Sp. cond., 350	
165/48-23b1	H. Gillespie	1960	330	12	330	100 to 330	--	--	--	94	3-23-60	--	--	75	Ir	D1, A, Ar	
165/48-23c1	H. Gillespie	1961	510	14	485	170 to 485	2341.2	Tc	.6	75.7	7-7-62	--	--	74	Ir	D1	
165/48-23d1	V. Gillespie	1961	474.0	14	503	270 to 503	--	Tc	1.2	79.1	7-7-62	--	--	74	U	D1	
165/48-24a1	M. Records	1956	480	14	--	--	2367	--	--	94.4	5-24-56	1600	--	80.5	Ir	D1, Sp. cond., 345	
165/48-24b1	R. Records	1960	289.3	12 3/4	306	110 to 306	2346.9	Tc	.2	84.1	7-9-62	--	--	74	Ir	D1	
165/48-24d1	R. Records	--	421	14	421	--	2357.1	Tc	.3	88.6	5-24-56	1100	--	81.5	Ir	D1, Sp. cond., 325	
165/48-25a1	G. Bettles	1921	164.6	16	164	60 to 150	2343.4	Tc	0	84.6	7-9-62	--	--	--	Obs	D1	

Table 3.--(continued.)

Well number and location	Owner	Year completed	Depth (feet)	Casing			Altitude (feet)	Meas. point		Water level		Yield (gpm)	Draw-down (feet)	Temperature (°F)	Status or use	Remarks
				Diameter (inches)	Depth (feet)	Perforated zone (feet)		Description	Height (feet)	Above (+) or below land surface (feet)	Date					
16S/48-25c1	G. Bettles	--	--	12	--	--	2326.6	Tc	--	67.1	7-9-62	500	18	--	Obs	--
16S/48-26a1	G. Bettles	--	<sup>m</sup> 137.6	16	--	--	2336	Tc	0	75.7	7-4-62	--	--	--	Obs	--
16S/48-27c1	M. Barr	1960	236	12	236	106 to 236	2321.6	Tc	.4	57.0	7-4-62	--	--	74	Ir	D1
16S/48-27c2	C. Barr	1960	<sup>m</sup> 11.43	10½	--	--	--	--	--	--	--	--	--	--	Dr, U	D1, original depth 236'
16S/48-27d1	M. Delph	1956	<sup>m</sup> 188.4	12	200	65 to 200	2324.6	Ep	.4	58.8	7-4-62	--	--	--	Ir	D1
16S/48-36a1	G. Bettles	1917	165	--	--	--	2323.7	Tc	0	67.5	7-5-62	1,000	--	76	Dr, Ir	A, Ar, Sp. cond., 620
16S/48-36d1	R. Watson	1959	407	14	407	165 to 407	2303.3	--	--	42	6-25-59	<sup>m</sup> 940	--	70	Ir	D1, A, Ar, Sp. cond., 675
16S/48-36d2	G. Bettles	--	62	16	--	--	2304	Tc	.6	56.1	7-5-62	--	--	--	Obs	--
16S/49-6a1	--	1962	350	14	--	160 to 350	2441	L	--	148.78	10-12-62	--	--	--	U	--
16S/49-8a1	M. Meese	1962	<sup>m</sup> 290.5	14	300	170 to 300	--	Tc	.3	148.4	6-29-62	--	--	63	Ir	D1
16S/49-9c1	T. Schbach	1958	300	12	300	--	2434	--	--	150	7-15-58	<sup>m</sup> 274	--	75	Ir	D1, A, Ar
16S/49-9d1	Nyc Convey Land Development Co., Inc.	1962	<sup>m</sup> 189.8	6½	--	--	--	Tc	.9	160.8	6-29-62	--	--	--	D	--
16S/49-10c1	Miller Well #1	--	68	60	--	--	2444.2	--	--	--	--	--	--	--	Dr, U	Originally described in U.S.G.S. Bull. 308 as 186' deep and having a water level of 183'
16S/49-12c1	--	--	<sup>m</sup> 448.0	12	--	--	--	Tc	0	173.9	6-29-62	--	--	--	U	--
16S/49-14a1	W. Johns	1959	300	12	290	51 to 290	2450	Tc	.4	158.7	6-29-62	400	--	--	Ir	D1
16S/49-14b1	W. Johns	1960	<sup>m</sup> 370.8	12 3/4	390	150 to 390	--	Tc	.4	157.3	6-29-62	--	--	73	Ir	D1
16S/49-15a1	W. Johns	1960	<sup>m</sup> 390.2	12 3/4	420	150 to 420	--	Ep	.1	168.8	6-29-62	--	--	75	Ir	D1
16S/49-18a1	W. Hanks	1960	420	12 3/4	420	140 to 420	--	Tc	.2	116.2	6-28-62	--	--	73	Ir	D1
16S/49-18d1	--	--	--	--	--	--	2383	Ep	.5	116.3	6-28-62	--	--	--	Ir	--
16S/49-18d2	U.S.R.L.M.	--	<sup>m</sup> 348.1	12	--	--	2375.1	Tc	0	108.5	6-28-62	--	--	--	Obs	--
16S/49-19a1	L. Meeter	1955	<sup>m</sup> 104.5	14	480	130 to 480	2373.6	Tc	3.0	104.6	9-15-59	--	--	--	Dr	D1. Used by U.S.G.S. as obs. well from 1955-59. Well cased in 1960
16S/49-19b1	L. Meeter	1955	725	14-8	725	100 to 725	2370.8	Ep	1.0	106.0	7-9-62	2,400	--	--	Ir	D1, 14" csg. from 0' to 526', 8" csg. from 526 to 725'
16S/49-19c1	R. Records	1960	300	12 3/4	300	100 to 300	2357.9	Tc	.4	98.0	7-9-62	1,200	--	74	Ir	D1
16S/49-19d1	L. Meeter	1954	307	14	307	120 to 307	2362.8	Dp	.5	99.0	7-9-62	--	--	--	Ir	D1
16S/49-20a1	M. Fravis, J. Earl, P. Clement	1959	<sup>m</sup> 204.1	14	300	110 to 150 170 to 190 220 to 240 280 to 300	2384	Tc	1.0	118.4	6-28-62	--	--	60	Tr	D1
16S/49-20d1	E. Easterbrook	1959	410	12	410	136 to 410	2366	--	--	--	--	--	--	--	Ir	D1
16S/49-22b1	--	--	<sup>m</sup> 346.9	12	--	--	2395	Tc	1.1	131.1	6-28-62	--	--	--	Ir	--
16S/49-22d1	--	--	<sup>m</sup> 340.8	16	--	--	--	Ep	.4	112.1	6-28-62	--	--	--	Ir	--
16S/49-23a1	R. Dalton	1961	<sup>m</sup> 381.7	12	500	120 to 500	2403	Tc	1.3	105.9	6-28-62	--	--	--	Ir	D1
16S/49-26d1	D. Ellsborough	1960	<sup>m</sup> 278.2	14	300	--	2351	Tc	.5	82.7	6-26-62	--	--	--	Ir	D1
16S/49-26d2	M. Records	1961	300	10 3/4	300	140 to 300	2352	Ep	.4	106.8	6-26-62	--	--	--	Ir	D1
16S/49-26d3	H. Weimer	1962	200	10 3/4	200	--	--	--	--	112	6-20-62	--	--	--	D	--
16S/49-28a1	M. Wickner	1959	300	16	300	120 to 300	2367	--	--	106	3-15-59	--	--	75	Ir	D1, Sp. cond. 440
16S/49-28c1	E. Mason	1959	<sup>m</sup> 185.2	16	200	107 to 200	2349	Ep	.8	92.0	6-26-62	--	--	65	Tr	D1
16S/49-28d1	M. Wickner	1959	<sup>m</sup> 256.0	16	300	117 to 300	2354	Ep	.1	97.0	6-26-62	--	--	65	Ir	D1
16S/49-29c1	L. Gamell	1956	<sup>m</sup> 82.4	--	--	--	2338	L	0	80.9	6-26-62	--	--	--	U	D1, no csg, hole diameter 14"
16S/49-30b1	G. Bettles	--	<sup>m</sup> 84.6	16	--	--	2348.2	Tc	.4	84.9	9-3-58	--	--	--	Dr, U	Original depth rept. 180'
16S/49-31b1	G. Bettles	--	<sup>m</sup> 152.9	16½	--	--	2326.3	Tc	0	69.4	6-26-62	--	--	--	Obs	Meas. by U.S.G.S. yearly
16S/49-32b1	J. Housell	1956	<sup>m</sup> 74.0	--	--	--	2328	--	--	--	--	--	--	--	Dr	D1, no csg.
16S/49-32c1	J. Housell	1956	<sup>m</sup> 66.2	--	--	--	2317	L	0	63.6	6-26-62	--	--	--	U	D1, no csg.
16S/49-32d1	M. Stephens	1959	<sup>m</sup> 232.8	12 3/4	253	94 to 248	2324	Tc	.9	69.2	6-26-62	--	--	70	Ir	D1
16S/49-33b1	M. Rodkes	1960	<sup>m</sup> 217.1	14	300	100 to 300	2336	Tc	1.2	81.6	6-26-62	--	--	--	Ir	D1
16S/49-33d1	P. Hoalg	1962	<sup>m</sup> 321.0	14	--	--	--	Ep	.7	84.5	6-20-62	--	--	--	Ir	--
16S/49-34c1	--	1962	--	--	--	--	--	L	--	88.17	10-24-62	450	--	--	Ir	--
16S/49-35a1	N. Barry	1957	<sup>m</sup> 170.6	16	200	110 to 200	2323	Ep	.2	99.3	6-27-62	750	--	--	Ir	D1
16S/49-35b1	E. McCoy	1959	325	14	223	100 to 223	2341	--	--	85	3-15-59	--	--	76	Ir	D1, A, Ar
16S/49-36a1	Bradley	--	--	12	--	--	--	--	--	--	--	--	--	--	Ir	--
16S/50-7c1	L. Cook	1961	200	6	200	120 to 200	2480	--	--	140	7-31-62	--	--	--	D	D1, A, Ar
16S/50-7c2	L. Cook	1962	335	12	--	--	2478	Tc	.9	112.8	8-18-62	--	--	--	Ir	--

Table 3.--(continued.)

Well number and location	Owner	Year completed	Depth (feet)	Casing			Perfor- ated zone (feet)	Altitude (feet)	Eleva- tion (feet)	Height (feet)	Water level		Yield (gpm)	Draw- down (feet)	Temp- erature (°F)	Status for use	Remarks
				Dia- meter (inches)	Depth (feet)	Perfor- ated zone (feet)					Above (+) or below land surface (feet)	Date					
168/51-28d1	Miller Well #2	--	29	6	--	--	2370.6	--	--	70	1907	--	--	--	Dr; U	Water level, rept. 70' in U.S.G.S. Bull. 308, 1907	
168/51-36a1	--	1962	--	8	--	--	2444.4	L	0	99.5	8-30-62	--	--	--	Ir	--	
168/52- 8c1	Las Vegas and Tonopah R.R.	--	0	2 3/4	--	--	2777	--	--	--	--	--	--	--	Dr; U	T.D. in 1952 was 149.5; well was dry; well now destroyed	
168/53- 4b1	--	1962	1946	13 3/4 to 6 1/8	1360	800 to 1050	3154	Ep	--	786	7- -62	438	130	89	P	A	
178/48- 1a1	D. Hallowell	1957	135	16	135	73 to 131	2303	Tc	.2	51.6	7- 5-62	750	15	--	Tr	D1	
178/48- 1c1	W. Hoyle	1955	214	14	214	92 to 205	2295.7	Tc	.5	45.2	7- 5-62	--	--	--	Ir	D1	
178/48- 1d1	A. Bettles	1959	203	12	203	60 to 202	--	Dp	.8	43.8	7- 5-62	--	--	--	Ir	D1	
178/48- 1d2	A. Bettles	1960	101.9	14	105	43 to 105	--	Tc	.2	45.6	7- 5-62	--	--	--	Ir	D1	
178/48- 1d3	A. Bettles	1960	188.4	14	197	30 to 197	2292.6	Tc	.5	43.7	7- 5-62	--	--	70	Ir	D1	
178/48-12a1	A. Bettles	1955	85	14	--	--	--	--	--	42	12- 6-55	--	--	--	Tr	D1	
178/48-12a2	A. Bettles	1955	85.4	12	--	--	2284.4	Ep	.8	35.0	6-25-62	--	--	--	Ir	--	
178/48-12d1	--	1962	205	14	205	60 to 205	--	L	--	51.03	10-31-62	--	--	--	U	--	
178/49- 2b1	--	--	174.3	16	--	--	2301	Tc	.1	81.6	6-26-62	--	--	--	Ir	--	
178/49- 2b2	H. Berry	1957	82.2	--	--	--	2305	--	--	60	5- 7-57	850	60	--	Dr; U	D1, well uncased	
178/49- 2c1	--	--	191.2	12	--	--	2292	Tc	.9	71.8	6-26-62	--	--	--	Ir	--	
178/49- 4a1	Nye County Land Development Co., Inc.	1962	630	14	588	--	--	L	--	80.68	10-30-62	650	125	83	Tr	--	
178/49- 4d1	Nye County Land Development Co., Inc.	1962	554	16	554	--	2290	L	--	69.38	9-14-62	--	--	--	B	--	
178/49- 5a1	W. Moore, Jr.	1956	91.2	--	--	--	2317	L	0	84.3	6-26-62	--	--	--	U	D1	
178/49- 5a2	W. Moore, Jr.	1956	49.5	--	--	--	2302	--	--	68	1-20-56	--	--	--	Dr; U	D1, hole diam. 16"	
178/49- 5b1	P. Moore	1956	51.6	--	--	--	2300	--	--	52	1-16-56	--	--	--	Dr; U	D1, hole diam. 16"	
178/49- 5b2	--	--	16.8	--	--	--	2299	--	--	--	--	--	--	--	Dr; U	Hole diam. 16"	
178/49- 6a1	E. Cleveland	1955	56.4	--	--	--	2310	--	--	39	12-22-55	--	--	--	Dr; U	D1	
178/49- 6a2	E. Cleveland	1956	68.6	--	--	--	2298	L	0	66.4	6-26-62	--	--	--	U	D1, hole diam. 16"	
178/49- 6b1	J. Tynan	1955	119.6	12 3/4	155	66 to 155	2305	Tc	1.0	50.1	6-26-62	--	--	--	Ir	D1	
178/49- 7a1	T. Davis	1960	209.3	14	210	55 to 210	--	Tc	1.8	56.7	6-25-62	--	--	74	Ir	D1	
178/49- 7b1	H. Davis	1960	500	16	390	56 to 385	--	Ep	0.0	40.8	6-25-62	--	--	--	Ir	D1	
178/49- 7c1	H. Davis	1955	61	--	--	--	--	--	--	44	12- 3-55	--	--	--	U	D1, well destroyed	
178/49- 7d1	T. Davis	1960	400	16	361	54 to 360	--	Tc	.2	57.5	6-25-62	--	--	74	Ir	D1	
178/49- 8a1	A. Cleveland	1956	59.4	--	--	--	2284.7	Ep	.4	57.7	5-11-56	--	--	--	Dr; U	D1	
178/49- 8c1	F. Cleveland	1956	61.1	--	--	--	--	Ep	.4	49.3	6-25-62	--	--	--	U	D1, hole diam. 16"	
178/49- 8d1	A. Cleveland	1956	50.3	--	--	--	--	Ep	.5	48.1	6-25-62	--	--	--	U	D1, hole diam. 16"	
178/49- 9b1	S. Wall, R. Geers	1959	500	16-12	480	150 to 352 330 to 480	2285.5	Ep	1.5	157.1	6-20-62	800-900	154.7	65	Ir	D1, 16" csg. 0-352; 12" csg. 330-480; Sp. cond., 350	
178/49-11b1	G. Bettles	1955	145.4	10	160	45 to 160	2274.8	Tc	.6	61.6	6-20-62	--	--	--	Ir	D1, Sp. cond., 960	
178/49-11b2	L. Stegel	1962	274.5	14	300	80 to 300	--	Ep	.4	59.4	6-20-62	--	--	70	Ir	D1	
178/49-15b1	J. Steelman	1959	200	10	201	55 to 200	2264.8	Dp	5.0	52.0	6-19-62	--	--	--	Ir	D1	
178/50-15a1	Nye County Land Development Co., Inc.	1962	464.6	16-14	480	100 to 475	2289.8	Tc	1.4	0.0	6-14-62	--	--	67	Ir	D1, A, 16" csg. 0-186; 14" csg. 175-480; measured flow 2.5 gpm on 6-14-62; Sp. cond., 700	
178/50-29d1	Nye County Land Development Co., Inc.	1962	470.6	16	514	150 to 500	2170.9	--	--	0.0	6-16-62	2000	30	67	Ir	D1, A, Ar; measured flow 5.4 gpm on 6-16-62; Sp. cond., 950	
178/51- 1a1	W. White	1959	135	8	135	48 to 135	2402.6	Tc	0.0	59.8	6- 9-62	191.1	11.0	73	Tr	D1, A	
178/51- 1a2	W. White	1959	103	8	103	--	2403	Tc	0.0	60.0	6- 9-62	--	--	--	D	--	
178/51-23b1	--	--	22.8	6	--	--	2328.3	Tc	0.0	0.0	6- 9-62	--	--	68	S	Measured flow 1/6 gpm on 6-9-62; Sp. cond., 600	
178/51-24b1	--	--	22.2	--	--	--	--	L	0.0	15.9	6- 9-62	--	--	--	U	Dug well 5' x 5'	
178/52- 8c1	J. Daniels	1961	400	16	--	39 to 139	2393.4	--	--	33	10-30-61	--	--	--	Tr	D1	
178/52- 8c2	J. Daniels	--	84.7	16	--	--	2397.3	Tc	0	36.8	6- 9-62	--	--	--	P	Supplies water to 8 families	
188/49- 1a1	--	--	21.3	--	--	--	--	Ep	.8	15.1	6-16-62	--	--	--	U	Dug well, diam. 4' x 4'	
188/49- 2c1	B. Embry	1962	402	12 3/4	402	303 to 402	2183.1	Tc	.1	71.6	7-31-62	--	--	--	D	D1	

Table 3.--(continued.)

Well number and location	Owner	Year completed	Depth (feet)	Casing			Altitude (feet)	Meas. point		Water level			Yield (gpm)	Draw-down (feet)	Temperature (°F)	Status or use	Remarks
				Dia-meter (inches)	Depth (feet)	Perforated zone (feet)		De-scription	Height (feet)	Above (+) or below land surface (feet)	Date						
<b>California</b>																	
25N/5-14c1	E. Lee	1935	m 139.2	12	--	65 to 70	2036.7	Ep	2.3	2.4	6-19-62	200	35	74.5	F	A, Sp. cond., 1,350	
25N/5-14c2	E. Lee	--	m 68.6	12	--	125 to 128	--	Tc	0.0	.9	6-18-62	--	--	73	U	Sp. cond., 1,800	
25N/5-15a1	California Div. of Highways	--	m 160	8	160	--	2049	Tc	.9	5.2	7-31-62	--	--	--	P	--	
25N/6-18a1	do	--	m 27.5	12	--	--	2033	Tc	.6	+ 1.1	8-24-62	--	--	67	U	A, Ar, measured flow 2 gpm on 6-21-62; Sp. cond., 1,600	
25N/6-18b1	do	--	m 7.2	30x30	--	--	--	Tc	.3	4.6	6-19-62	--	--	70	U	Sp. cond., 720	
25N/6-19a1	do	--	--	.8	--	--	--	--	--	--	--	--	--	66	U	Sp. cond., 1,400	
25N/6-19a2	do	--	m 6.9	6	--	--	--	Tc	2.2	1.6	6-21-62	--	--	--	U	--	
25N/6-19d1	do	--	m 3.4	9	--	--	2013.7	Tc	.1	0.0	6-21-62	--	--	68	U	Est. flow less than 1 gpm on 6-21-62; Sp. cond., 2,600	
25N/6-20c1	do	--	m 8.1	12	--	--	2015	Tc	.4	+ 4.1	8-24-62	--	--	68	U	A, Ar; meas. flow 2.2 gpm on 6-21-62; Sp. cond., 5,000	
25N/6-30a1	do	--	m 8.6	12	--	--	2011.7	Tc	1.0	+ .5	8-24-62	--	--	70	U	Estimated flow less than .1 gpm on 6-21-62; Sp. cond., 5,000	
25N/6-31d1	do	--	m 3.9	6	--	--	--	--	--	--	--	--	--	--	Dr; U	--	
26N/5-5b1	do	--	m 10.4	--	--	--	2181.7	L	0.0	9.2	6-18-62	--	--	--	U	Franklin's well on topographic map	
26N/5-9d1	do	--	m 3.0	--	--	--	--	--	--	--	--	--	--	--	Dr; U	Dug diam. 5' x 5'	
26N/5-34c1	do	--	m 19.3	--	--	--	--	--	--	--	--	--	--	--	Dr; U	Dug diam. 4' x 4'; Kelly's well on topographic map	
27N/4-25b1	do	--	m 22.8	60x60	--	--	2231	Tc	2.0	20.7	6-18-62	--	--	--	U	Scranton well on topographic map	
27N/4-26b1	Morris & Van Der Lendon	--	m 393.4	14	--	--	2237.2	Tc	.2	25.2	6-19-62	--	--	--	U	--	
27N/4-26c1	Morris & Van Der Lendon	--	300	14	--	--	2234.6	Ep	0.0	32.0	6-19-62	--	--	--	Tr	--	
27N/4-27a1	Morris & Van Der Lendon	1960	300	14	--	--	2241.9	--	--	--	--	m 912.7	--	72	Ir	Sp. cond., 1,100	
27N/4-27b1	Morris & Van Der Lendon	--	m 124.0	14	--	--	2243.8	Tc	0.0	42.6	6-19-62	--	--	--	U	--	
27N/4-27b2	Morris & Van Der Lendon	1962	300	14	--	--	2247.4	--	--	45	6-19-62	m 1275	--	72	Ir	A, Ar; meas. yield 8-18-62; Sp. cond., 970	
27N/4-27c1	Morris & Van Der Lendon	1961	m 284.4	14	--	--	2244.8	Ep	.9	40.6	6-19-62	--	--	--	Ir	--	





Table 4.--(continued.)

Material	Thickness (feet)	Depth (feet)	Material	Thickness (feet)	Depth (feet)
<b>16S/48-14bl. T. Callagher</b>			<b>16S/48-20bl. J. Downey</b>		
Topsoil	2	2	Topsoil	8	8
Sand and gravel	93	95	Sand	22	30
Clay	9	104	Rock	4	34
Sand and gravel, water	32	136	Sand, brown	151	185
Sand and fine gravel	10	146	Limestone	2	187
Gravel, large	12	158	Sand, brown	68	255
Sand and fine gravel	12	170	Limestone, broken	6	261
Gravel, medium	11	181	Limestone	14	275
Pea gravel	14	195	Limestone, broken	11	286
Sand, fine, and small gravel	8	203	Limestone, broken	50	336
Sand, fine, and light red clay	37	240	Sand, hard	30	366
Pea gravel and boulders	6	246	Total depth		366
Pea gravel and sand	17	263			
Sand and small gravel	32	295			
Clay	6	301	<b>16S/48-23al. H. Gillespie</b>		
Clay, fine, sandy	48	349	Sand and gravel	25	25
Total depth		349	Pea gravel	70	95
			Sand	80	175
			Gravel	155	330
			Clay	25	330
			Total depth		330
<b>16S/48-14dl. P. Perry</b>			<b>16S/48-23bl. H. Gillespie</b>		
Rock, sandy	90	90	Gravel, coarse	84	84
Clay	5	95	Gravel	230	314
Sand and gravel	15	110	Gravel and clay	10	324
Sand, hardpack	18	128	Clay	6	330
Clay	18	146	Total depth		330
Sand, fine	18	164			
Clay	16	180	<b>16S/48-23cl. H. Gillespie</b>		
Sand and gravel	30	210	Topsoil	10	10
Clay	18	228	Soil, sandy, tight	57	67
Sand and gravel	12	240	Sand, fine, and gravel	18	85
Total depth		240	Clay, light, sandy	77	162
			Clay, red, with streaks of gravel	33	195
			Clay, red, sandy, with streaks of white lime	128	323
			Sand and fine gravel	120	443
			Clay, sticky	37	480
			Sand, coarse, and gravel	21	501
			Clay, hard, sticky	9	510
			Total depth		510
<b>16S/48-15al. E. Mankinea</b>			<b>16S/48-23dl. V. Gillespie</b>		
Topsoil	4	4	Topsoil	8	8
Clay	9	13	Soil, sandy, tight	54	62
Sand, red, and gravel	31	44	Sand, fine, and gravel	19	81
Sand	45	89	Clay, light, sandy	77	158
Clay, red	8	97	Clay, red, with streaks of gravel	32	190
Sand and gravel, water	53	150	Clay, red, sandy, with streaks of white lime	130	320
Total depth		150	Sand and fine gravel	125	445
			Clay with streaks of white lime	35	480
			Pea gravel	21	501
			Clay, sticky	2	503
			Total depth		503
<b>16S/48-15bl. L. Danaby</b>			<b>16S/48-24al. M. Records</b>		
Topsoil	4	4	Surface soil	2	2
Clay	17	21	Gravel and sand	9	11
Clay	9	30	Clay	10	21
Sand and clay	15	45	Sand and gravel	10	31
Sand, hard, brown	22	67	Clay	15	46
Sand, hard	8	75	Sand and gravel	8	54
Gravel, red	5	80	Clay	12	66
Clay, brown, and sand	7	87	Gravel and sand	13	79
Clay, brown, and sand	6	93	Clay	12	91
Sand, water	9	102	Sand, gravel, and boulders	18	109
Sand and gravel	20	122	Clay	5	114
Gravel, water	7	129	Gravel and boulders	15	129
Gravel	8	137	Clay	19	148
Gravel, water	8	145	Sand and gravel	8	156
Clay and gravel	4	149	Clay	18	174
Total depth		149	Sand and gravel	23	197
			Clay	21	218
			Boulders and gravel	13	231
			Clay and boulders	23	254
			Sand and gravel	8	262
			Clay	14	276
			Sand, gravel, and boulders	8	284
			Clay	13	297
			Sand, gravel, and boulders	19	316
			Clay	11	327
			Sand and gravel	12	339
			Clay	23	362
			Boulders and clay	7	369
			Clay	18	387
			Boulders and clay	5	392
			Clay	22	414
			Boulders	7	421
			Clay, hard	48	469
			Boulders	3	472
			Rock	8	480
			Total depth		480
<b>16S/48-14bl. T. Callagher</b>			<b>16S/48-18bl. J. Bell</b>		
Topsoil	2	2	Topsoil	5	5
Sand and gravel	93	95	Sand	10	15
Clay	9	104	Sand, coarse	23	38
Sand and gravel, water	32	136	Sand and gravel	202	240
Sand and fine gravel	10	146	Sand	52	292
Gravel, large	12	158	Rock, broken	6	298
Sand and fine gravel	12	170	Sand, red	82	380
Gravel, medium	11	181	Total depth		380
Pea gravel	14	195			
Sand, fine, and small gravel	8	203			
Sand, fine, and light red clay	37	240			
Pea gravel and boulders	6	246			
Pea gravel and sand	17	263			
Sand and small gravel	32	295			
Clay	6	301			
Clay, fine, sandy	48	349			
Total depth		349			

Table 4.--(continued.)

Material	Thickness (feet)	Depth (feet)	Material	Thickness (feet)	Depth (feet)
<b>165/48-24cl. R. Records</b>			<b>165/48-27dl. M. Delph</b>		
Surface soil, sand, and gravel	35	35	Top soil	25	25
Gravel, medium	60	95	Limestone, very hard	4	29
Clay	40	135	Soil, sandy	20	49
Lime shale	70	205	Sandstone, crumbly	26	75
Clay	25	230	Clay, light and sand	50	125
Lime shale and gravel	76	306	Clay, pink and sand	15	140
Total depth		306	Sandstone, light brown	45	185
			Clay, red, and little sand	15	200
			Total depth		200
<b>165/48-24dl. R. Records</b>			<b>165/48-36dl. Mrs. H. Watson</b>		
Surface soil	2	2	Surface soil	32	32
Sand and gravel	6	8	Limestone, cemented, and gravel	13	45
Clay	6	14	Clay, reddish, cemented, and gravel	15	60
Sand and gravel	14	28	Clay, light colored, and sand	35	95
Clay	9	37	Sandstone, gray	10	105
Sand and gravel	6	43	Limestone, hard	5	110
Clay	11	54	Clay, red, and little sand	41	151
Sand and gravel	15	69	Clay, red, sticky	14	165
Clay and gravel	74	93	Clay, red, and sand	25	190
Sand and gravel	4	97	Clay, red, and gravel	10	200
Clay	6	103	Clay, brown	43	243
Sand and gravel	15	118	Limestone, hard	9	252
Clay	11	129	Clay, white (trace)?	43	295
Boulder and gravel	8	137	Clay, gray, with occasional boulder	55	350
Clay, hard	6	143	Limestone, gray (medium)	12	362
Gravel and sand	19	162	Clay, gray	33	395
Clay, hard	10	172	Limestone, gray (medium)	12	407
Clay, sandy	12	184	Total depth		407
Gravel, sandy	17	195			
Clay	17	213			
Sand, boulders, and gravel	14	227			
Clay	12	239			
Sand and gravel	16	255			
Clay	12	267			
Clay	16	283			
Sand, boulders, and gravel	16	299			
Clay	13	312			
Boulders and gravel	21	333			
Clay	1	334			
Gravel and sand	5	339			
Clay	22	361			
Boulders and gravel	17	378			
Clay	4	382			
Gravel and boulders	6	388			
Clay	3	391			
Gravel and sand	20	411			
Clay	10	421			
Total depth		421			
<b>165/48-25al. G. Bertles</b>			<b>165/48-8al. M. Neese</b>		
Pit	25	25	Surface soil	8	8
Gravel, coarse, and sand	6	31	Loose rock and gravel	82	90
Gravel, hard, fine, and sand	12	43	Dry gravel	6	96
Sand, hard, fine, with streaks of clay	7	50	Conglomerate	54	150
Gravel, cemented, and limestone	3	53	Sand, yellow	20	170
Gravel, hard, and limestone	6	59	Sand, light colored	20	190
Gravel, hard, and sand	6	65	Gravel, large, water	5	195
Gravel, fine, and sand	9	74	Clay, red, with lens of gravel and sand a few inches thick every 4 or 5 feet	105	300
Limestone, hard(?)	6	80	Total depth		300
Gravel, cemented	9	89			
Gravel, loose	4	93			
Sand, fine	8	101			
Gravel, coarse	3	104			
Gravel, fine	21	125			
Gravel, hard, coarse, clay, and limestone	3	128			
Clay, sandy	6	134			
Clay, hard, sandy, gravel, and limestone	12	146			
Gravel, with streaks of clay	9	155			
Gravel, hard, and limestone	5	160			
Gravel, cemented, and limestone	5	165			
Limestone	10	175			
Gravel, cemented	8	183			
Limestone, hard	3	186			
Gravel, cemented	4	190			
Gravel and some clay	5	195			
Limestone, sandy, very hard	3	198			
Total depth		198			
<b>165/48-27cl. M. Barr</b>			<b>165/49-9cl. T. Seibach</b>		
Sand and limestone	53	53	Sand and rock	11	11
Sand and gravel	20	73	Sand, hard pack, and rock	3	14
Gravel	10	83	Clay and rock	18	32
Rock and gravel	10	93	Sand and rock	37	69
Gravel, coarse	19	112	Clay, sandy	41	110
Gravel	30	142	Sand and rock	3	113
Sand and gravel	10	152	Clay, sandy	7	120
Sand	10	162	Sand	8	128
Sand and gravel	10	172	Sand and clay	14	142
Gravel	20	192	Sand and rock	8	150
Sand, fine	10	202	Clay and rock	30	180
Gravel	5	207	Clay	18	198
Gravel, coarse	10	217	Sand and gravel	12	210
Sand, clay, and gravel	10	227	Clay	25	235
Sand, fine, and clay	9	236	Sand, hard	7	242
Total depth		236	Clay	18	260
			Sand and rock	8	268
			Clay	22	290
			Sand and rock	8	298
			Clay	2	300
			Total depth		300
			<b>165/49-14al. W. Johns</b>		
			Loam, brown, sandy	2	2
			Sand and gravel	5	7
			Boulders	16	23
			Gravel, large	32	55
			Gravel, hard, compacted, and sand	55	110
			Clay and boulders	14	124
			Clay, light gray	5	129
			Clay, brown	36	165
			Clay and large gravel	10	175
			Limestone, hard	2	177
			Clay, brown	31	208
			Sand, hard, compacted	2	210
			Conglomerate composed of clay and gravel	90	300
			Total depth		300
			<b>165/49-14bl. W. Johns</b>		
			Surface soil, sand, and gravel	140	140
			Sand and gravel	150	290
			Gravel	100	390
			Clay		390
			Total depth		390

Table 4.--(continued.)

Material	Thickness (feet)	Depth (feet)	Material	Thickness (feet)	Depth (feet)
16S/49-15al. W. Johns			16S/49-19cl. R. Records		
Sand	23	23	Sand and gravel	26	24
Sand and gravel	13	36	Sand and coarse gravel	30	54
Gravel	28	64	Gravel, coarse	100	154
Sand and gravel	114	200	Clay	20	174
Clay, brown	109	309	Clay and gravel	10	184
Clay, gray	33	342	Gravel	10	194
Clay, brown	28	370	Clay and gravel	60	254
Sand	50	420	Sand and clay	20	274
Total depth		420	Clay and gravel	10	284
16S/49-18al. W. Hanks			Clay and small amount of gravel	10	294
Surface soil, sand, and gravel	80	80	Clay	6	300
Sand and pea gravel	280	360	Total depth		300
Sand, hard	25	385	16S/49-19dl. L. Meeter		
Gravel	15	400	Surface soil	2	2
Sand, hard	20	420	Sand and gravel	1	3
Clay		420	Hardpan	6	9
Total depth		420	Sand and gravel	13	22
16S/49-19al. L. Meeter			Clay	3	25
Surface soil	2	2	Boulders and clay	2	27
Gravel and sand	9	11	Clay	6	33
Clay	10	21	Sand and gravel	14	47
Sand and gravel	10	31	Clay and sand	17	64
Clay	15	46	Sand and gravel	9	73
Sand and gravel	8	54	Clay and sand	12	85
Clay	12	66	Gravel and boulders	22	107
Sand and gravel	13	79	Clay and sand	8	115
Clay	12	91	Gravel and sand	15	130
Sand, gravel, and boulders	18	109	Clay and gravel	12	142
Clay	5	114	Sand and gravel	15	157
Sand, boulders, and gravel	15	129	Clay and sand	8	165
Clay	19	148	Boulders	18	183
Sand and gravel	8	156	Clay and gravel	17	200
Clay	18	174	Boulders and gravel	10	210
Sand and gravel	23	197	Sand and gravel	13	223
Clay	21	218	Clay	7	230
Sand, boulders, and gravel	13	231	Gravel	20	250
Clay and boulders	23	254	Clay and gravel	7	257
Sand and gravel	9	263	Gravel and sand	12	269
Clay	13	276	Clay, hard	5	274
Sand, gravel, and boulders	8	284	Sand, boulders, and gravel	7	281
Clay	13	297	Clay	6	287
Sand, gravel, and boulders	19	316	Sand and gravel	4	291
Clay	11	327	Total depth		307
Sand and gravel	12	339	16S/49-20al. M. Travis, J. Earl, and P. Clement		
Clay	23	362	Sand and ash	80	80
Boulders and clay	7	369	Gravel, coarse	10	90
Clay	18	387	Sand, fine	20	110
Boulders and clay	5	392	Sand and gravel	58	168
Clay	22	414	Gravel	15	183
Boulders	7	421	Sand, coarse	24	207
Clay, hard	48	469	Sand, fine, and gravel in layers	57	264
Boulders	3	472	Sand, coarse	36	300
Rock	8	480	Total depth		300
Total depth		480	16S/49-20dl. E. Easterbrook		
16S/49-19bl. L. Meeter			Topsoil	2	2
Surface soil	3	3	Sand and rock	22	24
Hardpan	2	5	Sand, hard, and rock	18	42
Sand	6	11	Clay, white	8	50
Clay	12	23	Clay, and rock	60	110
Sand and gravel	18	41	Sand, hard, and rock	25	135
Clay	8	49	Clay	17	152
Sand and gravel	27	76	Sand, hard, and rock	58	210
Clay	31	107	Clay	25	235
Sand	22	129	Sand and gravel	22	257
Clay	19	148	Clay	19	276
Sand and gravel	16	164	Sand and gravel	22	298
Clay	13	177	Sand, hard, and gravel	34	332
Sand, gravel, and boulders	22	199	Clay, red	26	358
Clay	22	221	Sand and rock	40	400
Sand, gravel, and boulders	20	241	Total depth		410
Clay	21	262	16S/49-23al. Mrs. R. Dalton		
Sand and gravel	16	278	Clay	10	10
Clay	16	294	Sand and clay	30	40
Sand and gravel	26	320	Boulders	10	50
Clay	17	337	Sand and gravel	53	103
Sand and gravel	11	348	Sand	14	117
Clay	24	372	Clay, brown	3	120
Boulders and gravel	15	387	Gravel with streaks of clay	35	155
Clay	16	403	Clay, brown	10	165
Sand and gravel	23	426	Gravel	2	167
Clay	13	439	Clay, brown	43	210
Sand, gravel, and boulders	13	452	Gravel	45	255
Clay	17	469	Clay, brown	50	305
Sand	13	482	Gravel	27	332
Clay, hard	6	488	Clay, brown, sandy	27	359
Sand, gravel, and boulders	14	502	Gravel	3	362
Clay	19	521	Clay, brown, sandy	38	400
Sand, gravel, and boulders	44	565	Gravel	2	402
Clay	39	604	Clay, brown, sandy	31	433
Sand, gravel, and boulders	22	626	Sand, hard	37	470
Clay	17	643	Clay, brown	15	485
Sand, gravel, and boulders	18	661	Sand, hard	5	490
Clay	18	679	Clay, brown	10	500
Sand, gravel, and boulders	22	701	Total depth		500
Clay	10	711			
Sand and gravel	7	718			
Clay	7	725			
Total depth		725			

Table 4.--(continued.)


Material	Thickness (feet)	Depth (feet)	Material	Thickness (feet)	Depth (feet)
16S/49-26d1. D. Bilsborough			16S/49-33b1. M. Hodges		
Surface soil	2	2	Surface soil	9	9
Sand, gravel, and boulders	98	100	Sand and gravel	18	27
Sand	7	107	Clay, sandy	5	32
Gravel and boulders	11	118	Sand and gravel	40	72
Sand	6	124	Clay	7	79
Sand and gravel	56	180	Sand	26	105
Boulders, loose	22	202	Gravel and boulders	37	142
Sand and gravel	28	230	Clay, hard	20	162
Clay	2	232	Sand and gravel	51	213
Sand and gravel	68	300	Clay, sandy	25	238
Total depth		300	Sand and gravel	11	249
			Clay, sandy	51	300
16S/49-26d2. M. Records			Total depth		
Topsoil	6	6			300
Tight soil	9	15	16S/49-35a1 N. Berry		
Limestone, hard	7	22	Soil	4	4
Clay, light colored	18	40	Clay and gravel	21	25
Clay, brown or reddish	50	90	Boulders, large, and clay	15	40
Clay, light, with an occasional hard streak every 2 or 3 feet	50	140	Clay	50	90
Clay, light colored, with lens of sand and gravel	140	280	Boulders and clay	20	110
Clay, sticky	20	300	Sand	4	114
Total depth		300	Clay	46	160
			Clay and boulders	20	180
16S/49-28a1. M. Wickner			Total depth		
Topsoil	8	8			200
Conglomerate with few boulders	30	38	16S/49-35b1. E. McCoy		
Limestone, hard	2	40	Topsoil	12	12
Conglomerate with larger boulders	75	115	Clay, yellow	112	124
Sand, light colored	35	150	Boulders, large	11	135
Gravel, cemented	100	250	Clay, yellow	85	220
Gravel; water	3	253	Boulders and gravel	18	238
Gravel, cemented, with red clay lens	47	300	Clay, white	87	325
Total depth		300	Total depth		325
			16S/50-7c1. L. Cook		
16S/49-28c1. E. Mason			Sand	23	23
Topsoil	7	7	Boulders	66	89
Conglomerate with large boulders	33	40	Gravel, fine	15	104
Limestone	8	48	Clay	40	144
Conglomerate	67	115	Gravel, fine, and boulders	46	190
Sand, light colored	40	155	Boulders	4	194
Gravel, cemented	15	170	Clay	6	200
Sand and gravel	14	184	Total depth		200
Gravel, cemented	16	200	17S/48-1a1. D. Hallowell		
Total depth		200	Sand	35	35
			Limestone, white, soft, (?) or tufa	30	65
16S/49-28d1. M. Wickner			Gravel and sand; water	10	75
Topsoil	8	8	Gravel	60	135
Conglomerate with few boulders	27	35	Total depth		135
Limestone	7	42	17S/48-1c1. W. Hoyle		
Conglomerate	78	120	Surface soil	3	3
Sand, light colored	40	160	Sand	5	8
Gravel, cemented	120	280	Clay	5	13
Gravel; water	5	285	Sand and gravel	6	19
Clay, reddish, with little gravel	15	300	Clay	2	21
Total depth		300	Boulders and gravel	2	23
			Limestone	7	30
16S/49-29c1. L. Gamell			Clay with gravel	3	33
Surface soil	15	15	Clay	21	54
Soil, sandy	17	32	Sand and gravel	4	58
Soil and rocks	13	45	Boulders and gravel	6	64
Sand, light colored	25	70	Clay and boulders	3	67
Sand and gravel	27	97	Limestone	18	85
Total depth		97	Clay	7	92
			Sand and gravel	9	101
16S/49-32b1. J. Housell			Clay and gravel	10	111
Surface soil	15	15	Clay	5	116
Soil, sandy	17	32	Sand and gravel	12	128
Gravel, small, cemented	33	65	Clay	9	137
Gravel, large, cemented	23	88	Clay and gravel	14	151
Total depth		88	Limestone broken up with gravel	63	214
			Total depth		214
16S/49-32c1. J. Housell			17S/48-1d1. A. Bettles		
Surface soil	5	5	Topsoil	6	6
Rocks and soil	27	32	Clay, yellow	18	24
Gravel and reddish clay	28	60	Gravel and boulders	5	29
Gravel, fine, and sand	20	80	Clay, yellow	13	42
Total depth		80	Boulders	18	60
			Limestone	38	98
16S/49-32d1. M. Stephen			Clay, yellow	6	104
Clay and sand	70	70	Sand and gravel	16	120
Sand and gravel; water	48	118	Limestone	8	128
Clay and limestone	135	253	Limestone, hard	2	130
Total depth		253	Clay, yellow	10	140
			Clay, white	11	151
			Limestone	6	157
			Clay, white	23	180
			Gravel and sand	2	182
			Clay, brown	20	202
			Boulder	1	203
			Total depth		203

Table 4.--(continued.)

Material	Thickness (feet)	Depth (feet)	Material	Thickness (feet)	Depth (feet)
<b>178/49-8cl. F. Cleveland</b>			<b>178/50-15al. Nye County Land and Development Co., Inc.</b>		
Surface soil			Limestone; small amount water	40	40
Soil with gravel	12	12	Limestone, broken, and yellow clay	85	125
Limestone, white	20	32	Sand and gravel; small amount water	5	130
Clay, pink colored, and gravel	5	37	Limestone, gravel, and clay	112	242
Total depth	28	65	Limestone, gravel, sand, and clay	103	345
<b>178/49-8dl. A. Cleveland</b>			Gravel, cemented	55	400
Surface soil			Gravel, sand; small amount water	5	405
Soil, sandy	20	20	Gravel, cemented	92	497
Sand, cemented, and gravel	12	32	Total depth		497
Total depth	28	60	<b>178/50-29dl. Nye County Land and Development Co., Inc.</b>		
<b>178/49-9bl. S. Wall</b>			Topsoil	3	3
Topsoil			Limestone, hard	19	22
Sand, hard, and rock	8	8	Limestone, fractured; water	10	32
Clay, sandy	26	34	Clay, brown, sand, and limestone	11	43
Sand and gravel	46	80	Limestone	27	70
Sand, hard, and rock	28	108	Limestone, hard	5	75
Sand and rock	44	152	Limestone, fractured	65	140
Clay, sandy	36	188	Clay, gray	60	200
Sand and rock	22	210	Limestone, fractured	10	210
Clay and rock	30	240	Clay, gray and clay	17	227
Sand and rock	32	272	Sand; water	18	245
Limestone, hard	78	350	Sand, clay, and gravel	5	250
Sand, gray	6	356	Sand and gravel	30	280
Clay, gray	64	420	Gravel, cemented	40	320
Clay, light colored	40	460	Sand, gravel, and quartz	18	338
Total depth	40	500	Gravel, cemented	4	342
<b>178/49-11bl. G. Battles</b>			Sand; water	73	415
Surface soil			Clay, red, and lava	75	490
Clay	26	26	Clay, red	35	525
Gravel and sand	18	44	Total depth	5	530
Clay and boulders	4	48	<b>178/51-1al. W. White</b>		
Sand and gravel	14	62	Sand and clay		
Boulders and clay	7	69	Rocks	30	30
Sand and gravel	9	78	Sand, coarse, and clay	5	35
Boulders and clay	7	85	Mud, sticky, gray	20	55
Sand and gravel	6	91	Clay	9	64
Boulders and clay	50	141	Clay, slipping, and boulders	16	80
Sand and gravel	3	144	Clay, white	22	102
Total depth	41	185	Clay and gravel	20	122
<b>178/49-11b2. Mrs. L. Siegel</b>			Total depth	13	135
Topsoil			<b>178/52-8cl. J. Daniels</b>		
Loose rocks and soil	4	4	Clay		
Limestone, hard, light colored	13	17	Boulders	33	33
Sand, reddish	53	70	Gravel, large	12	45
Sand and gravel	30	100	Boulders	7	52
Sand and clay	158	258	Limestone, black	268	320
Clay, white	20	278	Total depth	80	400
Clay, red	7	285	<b>188/49-2cl. B. Embry</b>		
Total depth	15	300	Sand and gravel		
<b>178/49-15bl. J. Steelman</b>			Clay, sandy	10	10
Topsoil			Conglomerate, hard	12	22
Gravel	4	4	Clay, gray	7	29
Caliche	7	11	Gravel, large	11	40
Gravel, cemented	27	38	Clay, gray	2	42
Sand and gravel; water	17	55	"Opalite"	83	125
Gravel, cemented	2	57	Clay, brown	2	127
Gravel; water	9	66	"Opalite"	13	140
Clay	8	74	Clay, brown	10	150
Clay with gravel lens 3 to 6 feet thick; water	5	79	Clay, brown, sandy	66	200
Conglomerate	64	143	Clay, blue	46	246
Gravel; water	3	146	Clay, brown	45	291
Limestone, very porous; water	18	164	Boulders and large gravel	13	304
Sand and gravel; water	13	177	Clay, brown, sandy	16	320
Total depth	23	200	Total depth	82	402
		200			402

Table 4.--(continued.)

Material	Thickness (feet)	Depth (feet)	Material	Thickness (feet)	Depth (feet)
<b>17S/48-1d2. A. Bettles</b>			<b>17S/49-6a1. E. Cleveland</b>		
Surface material	43	43	Topsoil	10	10
Limestone, hard	15	58	Soil, sandy	25	35
Limestone, porous, altered	47	105	Sand and gravel	33	68
Total depth		105	Total depth		68
<b>17S/48-1d3. A. Bettles</b>			<b>17S/49-6a2. E. Cleveland</b>		
Unrecorded	24	24	Topsoil	15	15
Sand and rock, water	30	54	Soil, sandy	20	35
Sand, gravel, and limestone	30	84	Sand and gravel	35	70
Limestone and sand	30	114	Sand, hard, cemented, and gravel	10	80
Sand and clay	29	143	Total depth		80
Clay and gravel	31	174			
Gravel; water	41	215			
Total depth		215			
<b>17S/48-12a1. A. Bettles</b>			<b>17S/49-6b1. J. Tynan</b>		
Surface soil	30	30	Topsoil	4	4
Limestone, cemented, and gravel	35	65	Soil, tight	16	20
Sandstone, reddish, porous, with gravel	20	85	Soil, sandy	2	22
Total depth		85	Clay and gravel	48	70
			Sand, light colored	2	72
			Clay, reddish, and gravel in layers	80	152
			Clay, red, with little sand	3	155
			Total depth		155
<b>17S/49-2b2. H. Berry</b>			<b>17S/49-7a1. T. Davis</b>		
Sand and gravel	40	40	Surface material	40	40
Clay and sand	10	50	Limestone, hard	15	55
Hardpan	10	60	Limestone, porous	155	210
Sand, and some granite	20	80	Total depth		210
Sand, gravel, and rock	40	120			
Sand and coarse gravel	30	150			
Sand, coarse gravel, and some clay	50	200			
Total depth		200			
<b>17S/49-4a1. Nye County Land and Development Col. Inc.</b>			<b>17S/49-7b1. H. Davis</b>		
Sand and pebble gravel Pink and yellow, rounded to angular and clear, rounded to euhedral, very fine to very coarse quartz. Rounded to angular, sand and pebble gravel (to a maximum of 10 mm) fragments of white to red, brown, and gray welded tuff. Caliche with very fine to very coarse quartz and magnetite. Some black obsidian either angular or rounded with calcareous deposit on outside, chert, and magnetite. Sand and gravel varies in percentage, throughout with either reaching a maximum of 80 to 85 percent. Tan to light brown, silty, calcareous clay between 340 and 250 feet	340	340	Topsoil	10	10
Clay, tan to light brown, silty, calcareous. Some very fine to very coarse quartz and magnetite, as above. Some white, calcareous material between 360 and 390 feet	100	440	Soil, tight	28	38
Sand and granule gravel. Pink and yellow, rounded to angular, and clear, rounded to euhedral, very fine to very coarse, silty quartz. Rounded to angular, sand and granule gravel fragments of white to red, brown, and gray welded tuff. Caliche with very fine to very coarse quartz and magnetite. Some black obsidian either angular or rounded with calcareous deposit on outside, chert and magnetite. Clay cuttings present throughout, probably cavings	70	510	Gravel, cemented, interbedded with hard limestone	97	135
Clay, tan to light brown, silty, calcareous. Some very fine sand as above. White calcareous material between 550 and 600 feet. Sandy with very fine to coarse quartz, welded tuff, caliche, obsidian, magnetite, and some very fine to very coarse fragments of basalt with calcite in basal 10 feet	90	600	Clay, reddish, sand and gravel, interbedded	55	190
Basalt, gray to black, subrounded to angular fragments, dense, vesicular, and calcitic. Some yellow material(?) both loose and with basalt	30	630	Clay, light colored, and sand	60	250
Total depth		630	Clay, light colored	35	285
			Limestone, white, chalky	13	298
			Clay, reddish, interbedded white limestone and gray, porous limestone	42	340
			Gravel, coarse, and sand	3	343
			Clay, red, interbedded with white limestone	42	385
			Sand and gravel	5	390
			Sand, mostly green	17	407
			Clay, red, interbedded with white limestone	28	435
			Clay, red, interbedded with gray porous limestone	45	480
			Sand, dark	5	485
			Clay, light colored	15	500
			Total depth		500
<b>17S/49-5a1. W. Moore, Jr.</b>			<b>17S/49-7c1. H. Davis</b>		
Topsoil	4	4	Surface soil	32	32
Soil and rocks	16	20	Limestone, cemented, and gravel	29	61
Soil, sandy	25	45	Total depth		61
Gravel, reddish, cemented	49	94			
Total depth		94			
<b>17S/49-5a2. W. Moore, Jr.</b>			<b>17S/49-7d1. T. Davis</b>		
Surface soil	7	7	Topsoil	10	10
Soil and rocks	23	30	Soil, tight, with gravel and rocks	27	37
Soil, sandy	10	40	Clay, light colored, with fine sand	33	70
Gravel, reddish, cemented	43	83	Clay, white	30	100
Total depth		83	Clay, pink, with streaks of sand	50	150
			Clay, light colored	12	162
			Clay, red, with streaks of gravel	13	175
			Clay, red, with thin layers of white limestone	25	200
			Limestone(?) Did not bail any mud through this formation. Bailor only brought up very small amounts of limestone cuttings	80	280
			Clay, red, with an occasional layer of white limestone	20	300
			Limestone, white, with few layers of sticky clay	30	330
			Limestone, white, with different changes of hardness	70	400
			Total depth		400
<b>17S/49-5b1. P. Moore</b>			<b>17S/49-8a1. A. Cleveland</b>		
Surface soil	18	18	Surface soil	25	25
Sand and gravel cemented with clay	42	60	Soil, sandy	15	40
Gravel, large (caving)	3	63	Soil, sandy, and gravel	38	78
Total depth		63	Total depth		78

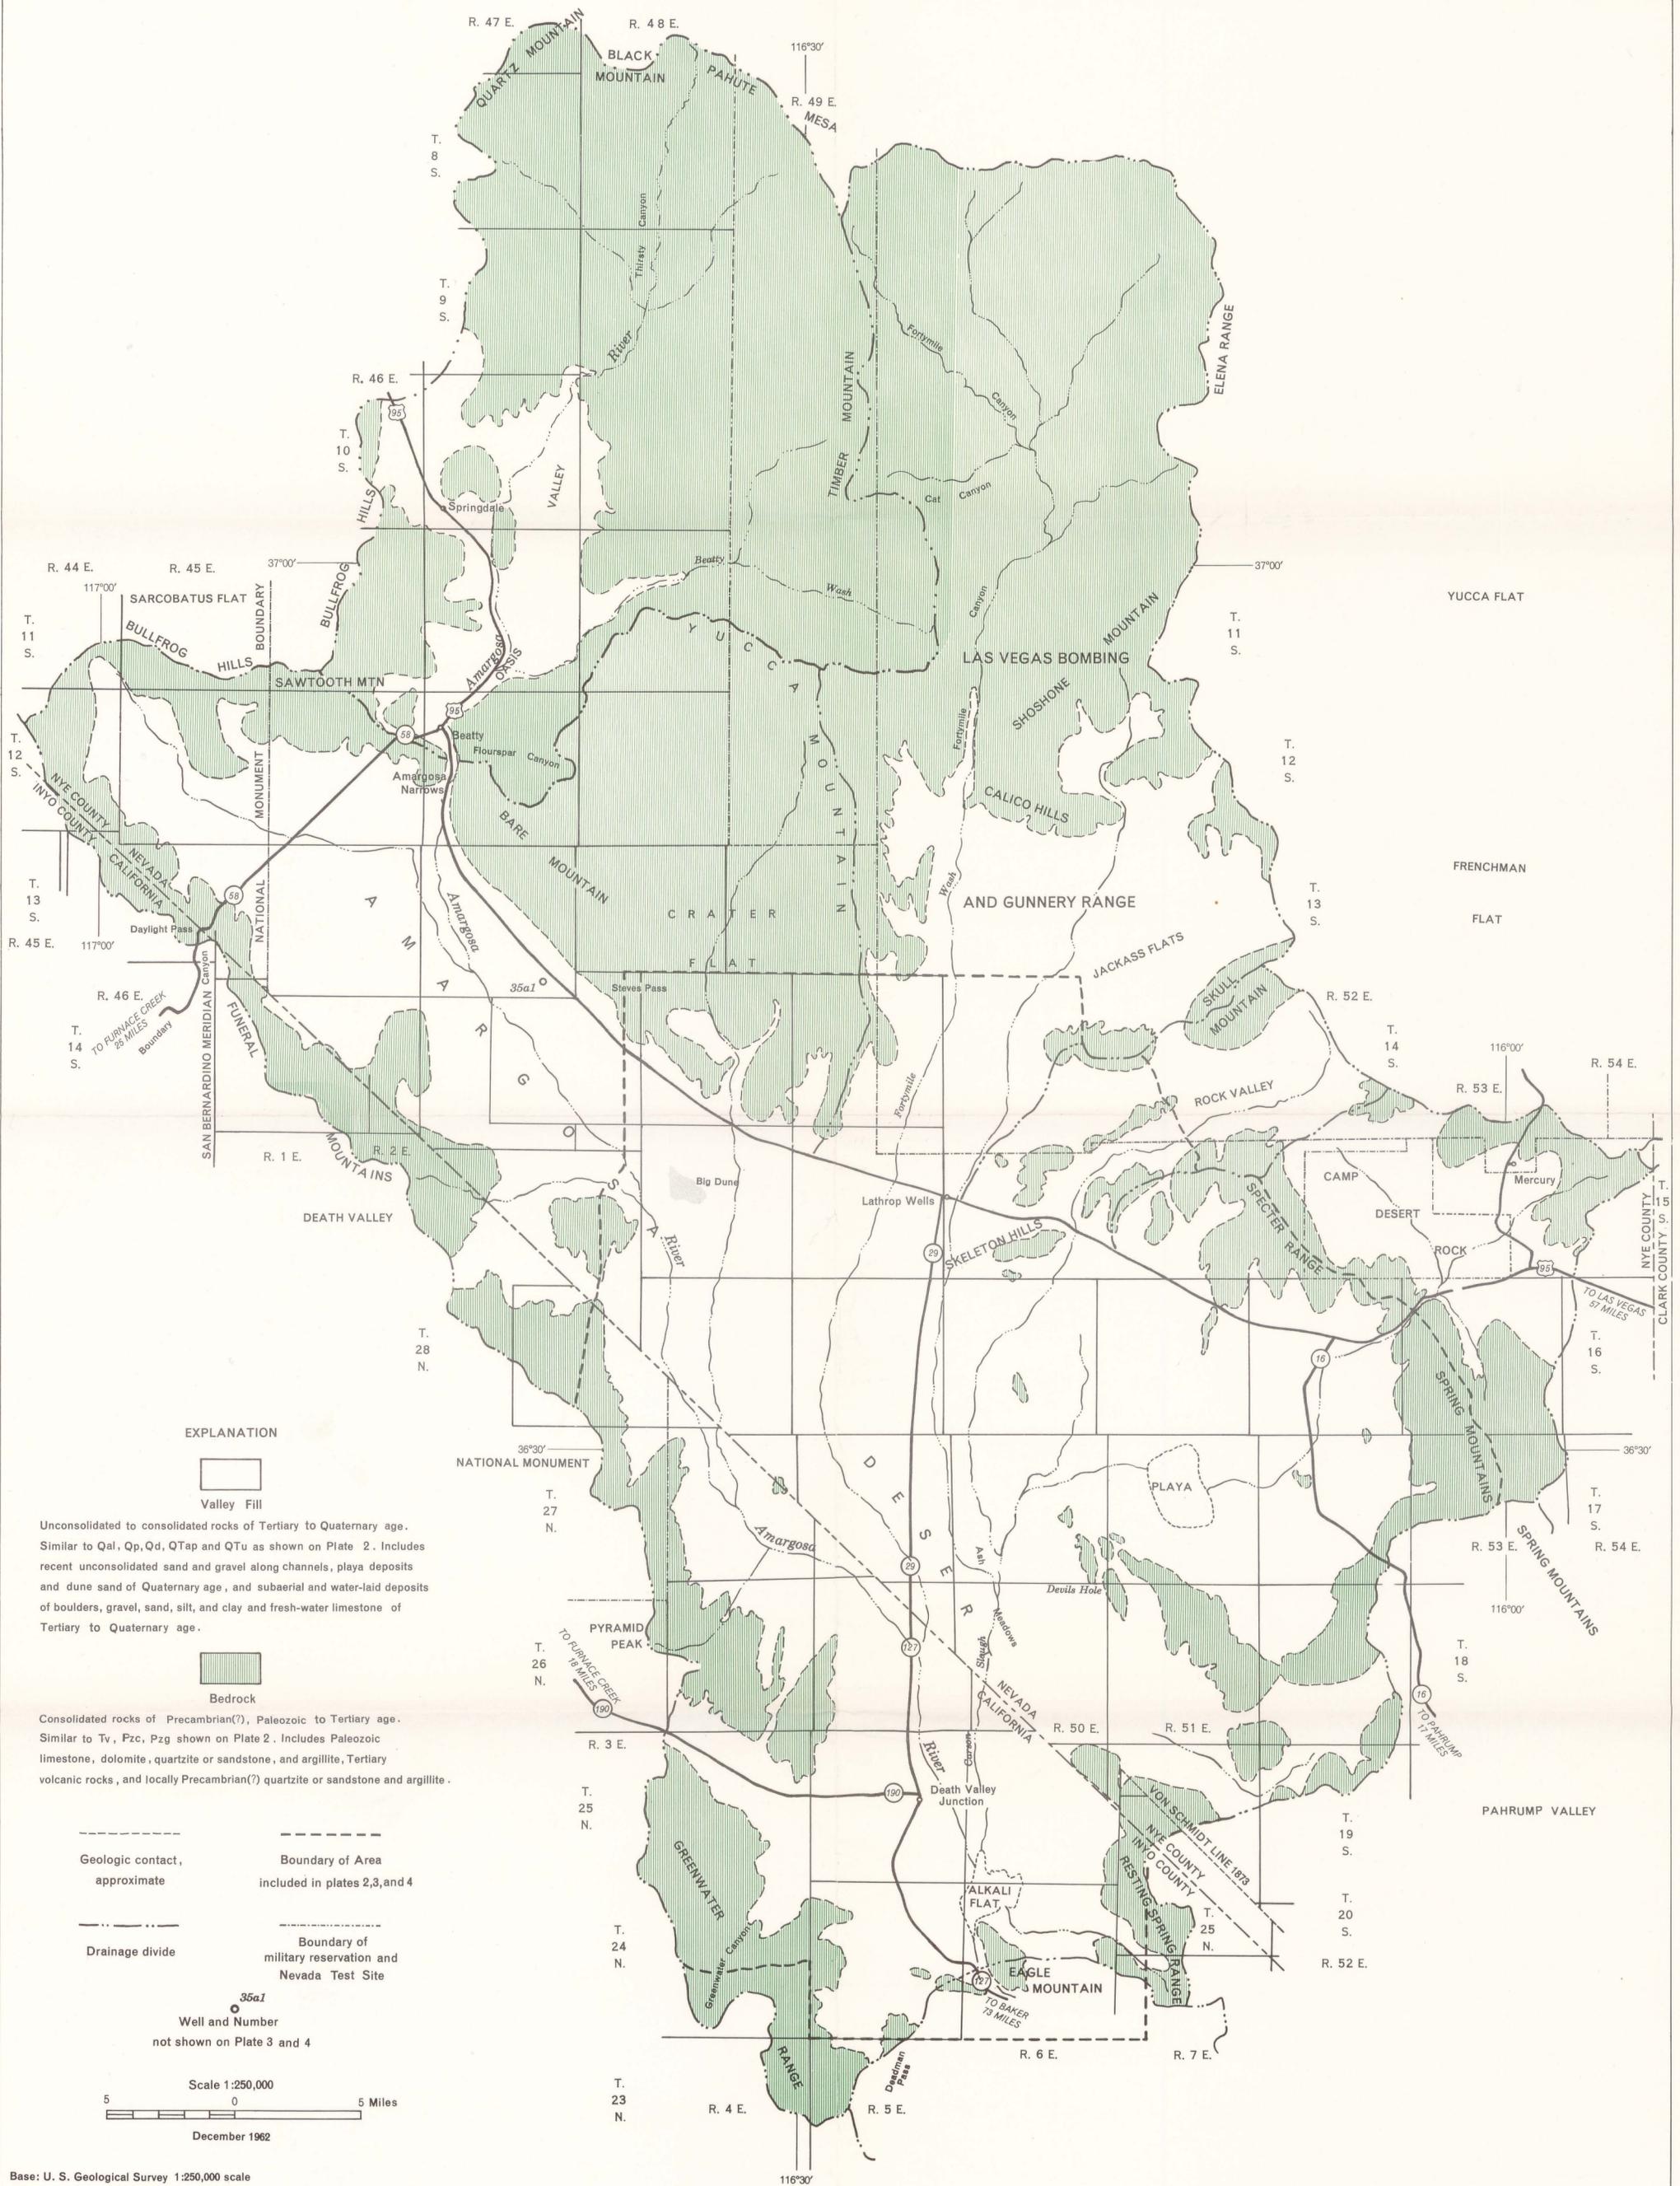

**EXPLANATION**




Valley Fill

Unconsolidated to consolidated rocks of Tertiary to Quaternary age. Similar to Qal, Qp, Qd, QTap and QTu as shown on Plate 2. Includes recent unconsolidated sand and gravel along channels, playa deposits and dune sand of Quaternary age, and subaerial and water-laid deposits of boulders, gravel, sand, silt, and clay and fresh-water limestone of Tertiary to Quaternary age.




Bedrock

Consolidated rocks of Precambrian(?), Paleozoic to Tertiary age. Similar to Tv, Pzc, Pzg shown on Plate 2. Includes Paleozoic limestone, dolomite, quartzite or sandstone, and argillite, Tertiary volcanic rocks, and locally Precambrian(?) quartzite or sandstone and argillite.




Geologic contact, approximate



Boundary of Area included in plates 2,3, and 4




Drainage divide



Boundary of military reservation and Nevada Test Site

35a1  
Well and Number not shown on Plate 3 and 4




Scale 1:250,000

December 1962

Base: U. S. Geological Survey 1:250,000 scale  
Topographic quadrangles; Death Valley (1958),  
Goldfield (1958), and Las Vegas (1959).

Geology by G. E. Walker, R. A. Young, and T. E. Eakin, 1962

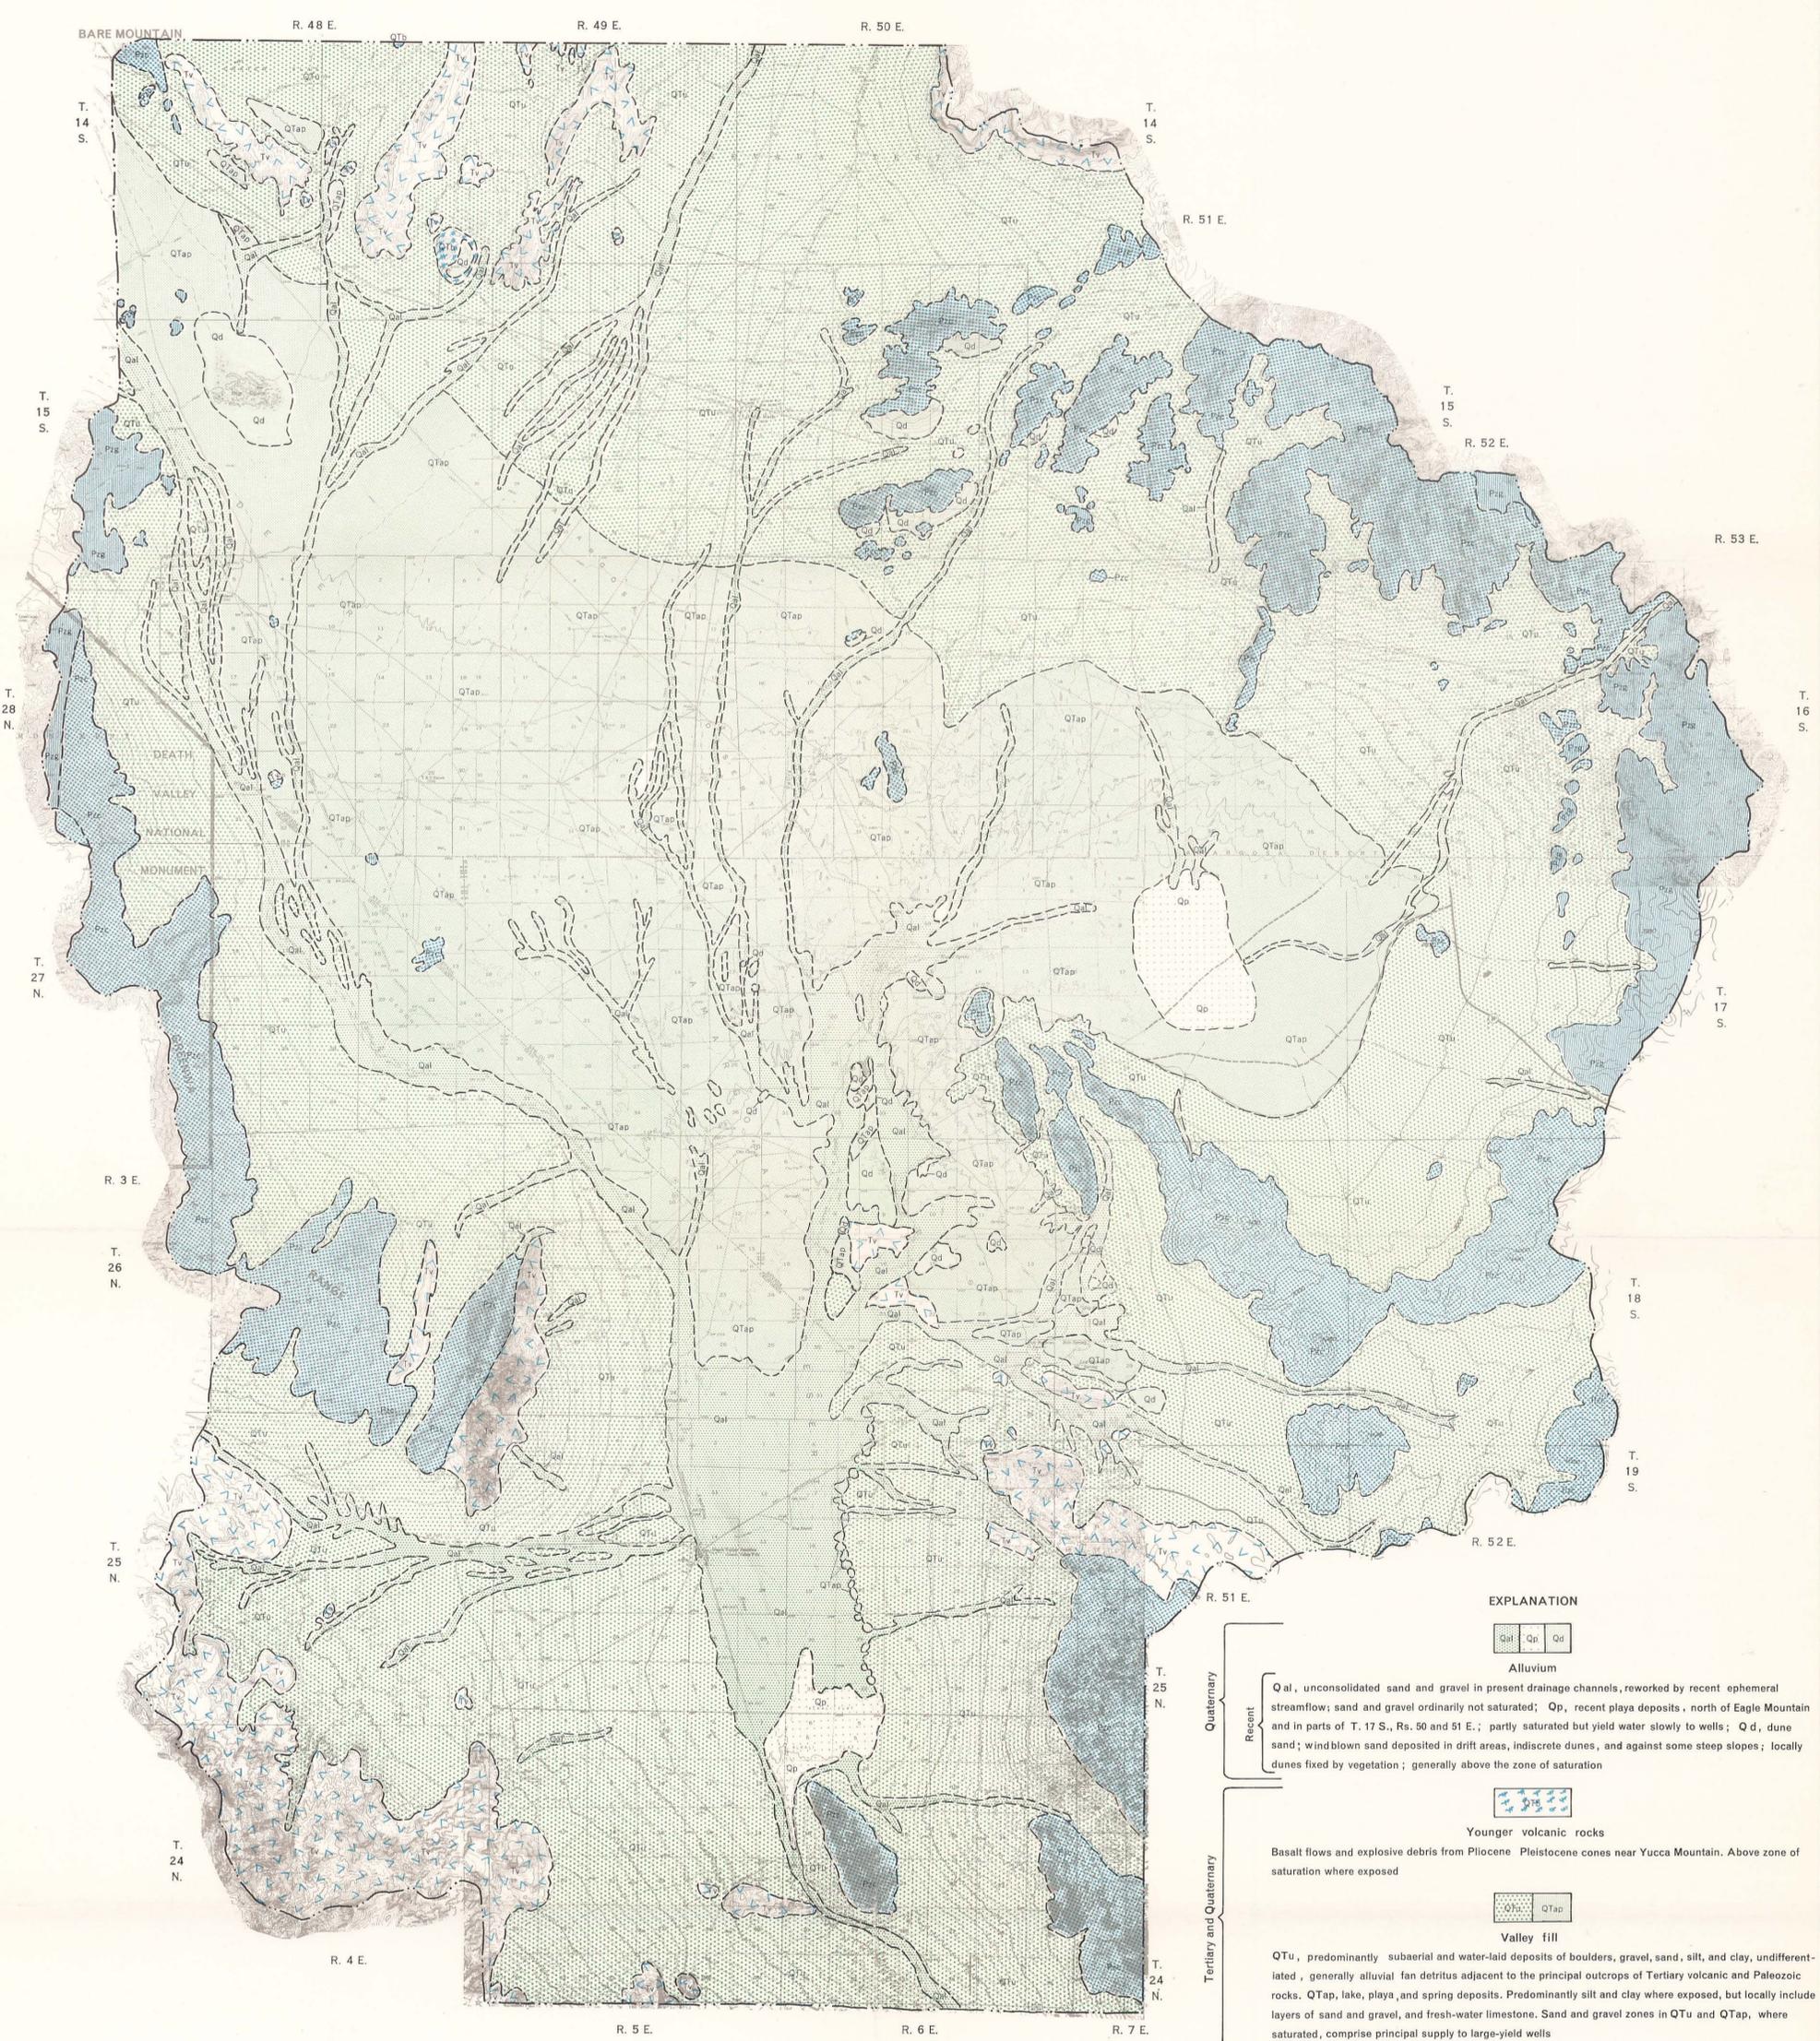

**EXPLANATION**

Quaternary	Recent		<b>Alluvium</b>
		Qal, unconsolidated sand and gravel in present drainage channels, reworked by recent ephemeral streamflow; sand and gravel ordinarily not saturated; Qp, recent playa deposits, north of Eagle Mountain and in parts of T. 17 S., Rs. 50 and 51 E.; partly saturated but yield water slowly to wells; Qd, dune sand; wind blown sand deposited in drift areas, indistinct dunes, and against some steep slopes; locally dunes fixed by vegetation; generally above the zone of saturation	
Tertiary and Quaternary			<b>Younger volcanic rocks</b>
		Basalt flows and explosive debris from Pliocene Pleistocene cones near Yucca Mountain. Above zone of saturation where exposed	
Tertiary			<b>Valley fill</b>
		QTu, predominantly subaerial and water-laid deposits of boulders, gravel, sand, silt, and clay, undifferentiated, generally alluvial fan detritus adjacent to the principal outcrops of Tertiary volcanic and Paleozoic rocks. QTap, lake, playa, and spring deposits. Predominantly silt and clay where exposed, but locally include layers of sand and gravel, and fresh-water limestone. Sand and gravel zones in QTu and QTap, where saturated, comprise principal supply to large-yield wells	
Paleozoic			<b>Volcanic rocks</b>
		Largely volcanic tuff and ash fall material, locally welded; includes some flows. Yields to wells small unless developed throughout thick section of saturated tuff or in highly fractured welded tuff	
Paleozoic			<b>Sedimentary rocks</b>
		Pzc, Limestone and dolomite of Paleozoic age; transmits water freely where highly fractured or where solution openings occur; Pzg, quartzite or sandstone and argillite of Paleozoic age or, southwest of Big Dune, of Precambrian (?) age	


Geologic contact, approximate      Boundary of Death Valley National Monument  
 Boundary of plate, in part drainage divide      Boundary of military reservation

Scale 1:125,000

Base: U. S. Geological Survey 1:62,500 scale Topographic quadrangles; Ash Meadows (1952), Big Dune (1952), Eagle Mountain (1951), Ryan (1952), and Specter Range (1952); and Lathrop Wells (unpublished); and 1:250,000 scale Topographic quadrangle, Death Valley (1958)


PLATE 2. GENERALIZED GEOLOGY MAP OF THE AMARGOSA DESERT IN THE VICINITY OF LATHROP WELLS, NEVADA, AND DEATH VALLEY JUNCTION, CALIFORNIA

135/51-30d1

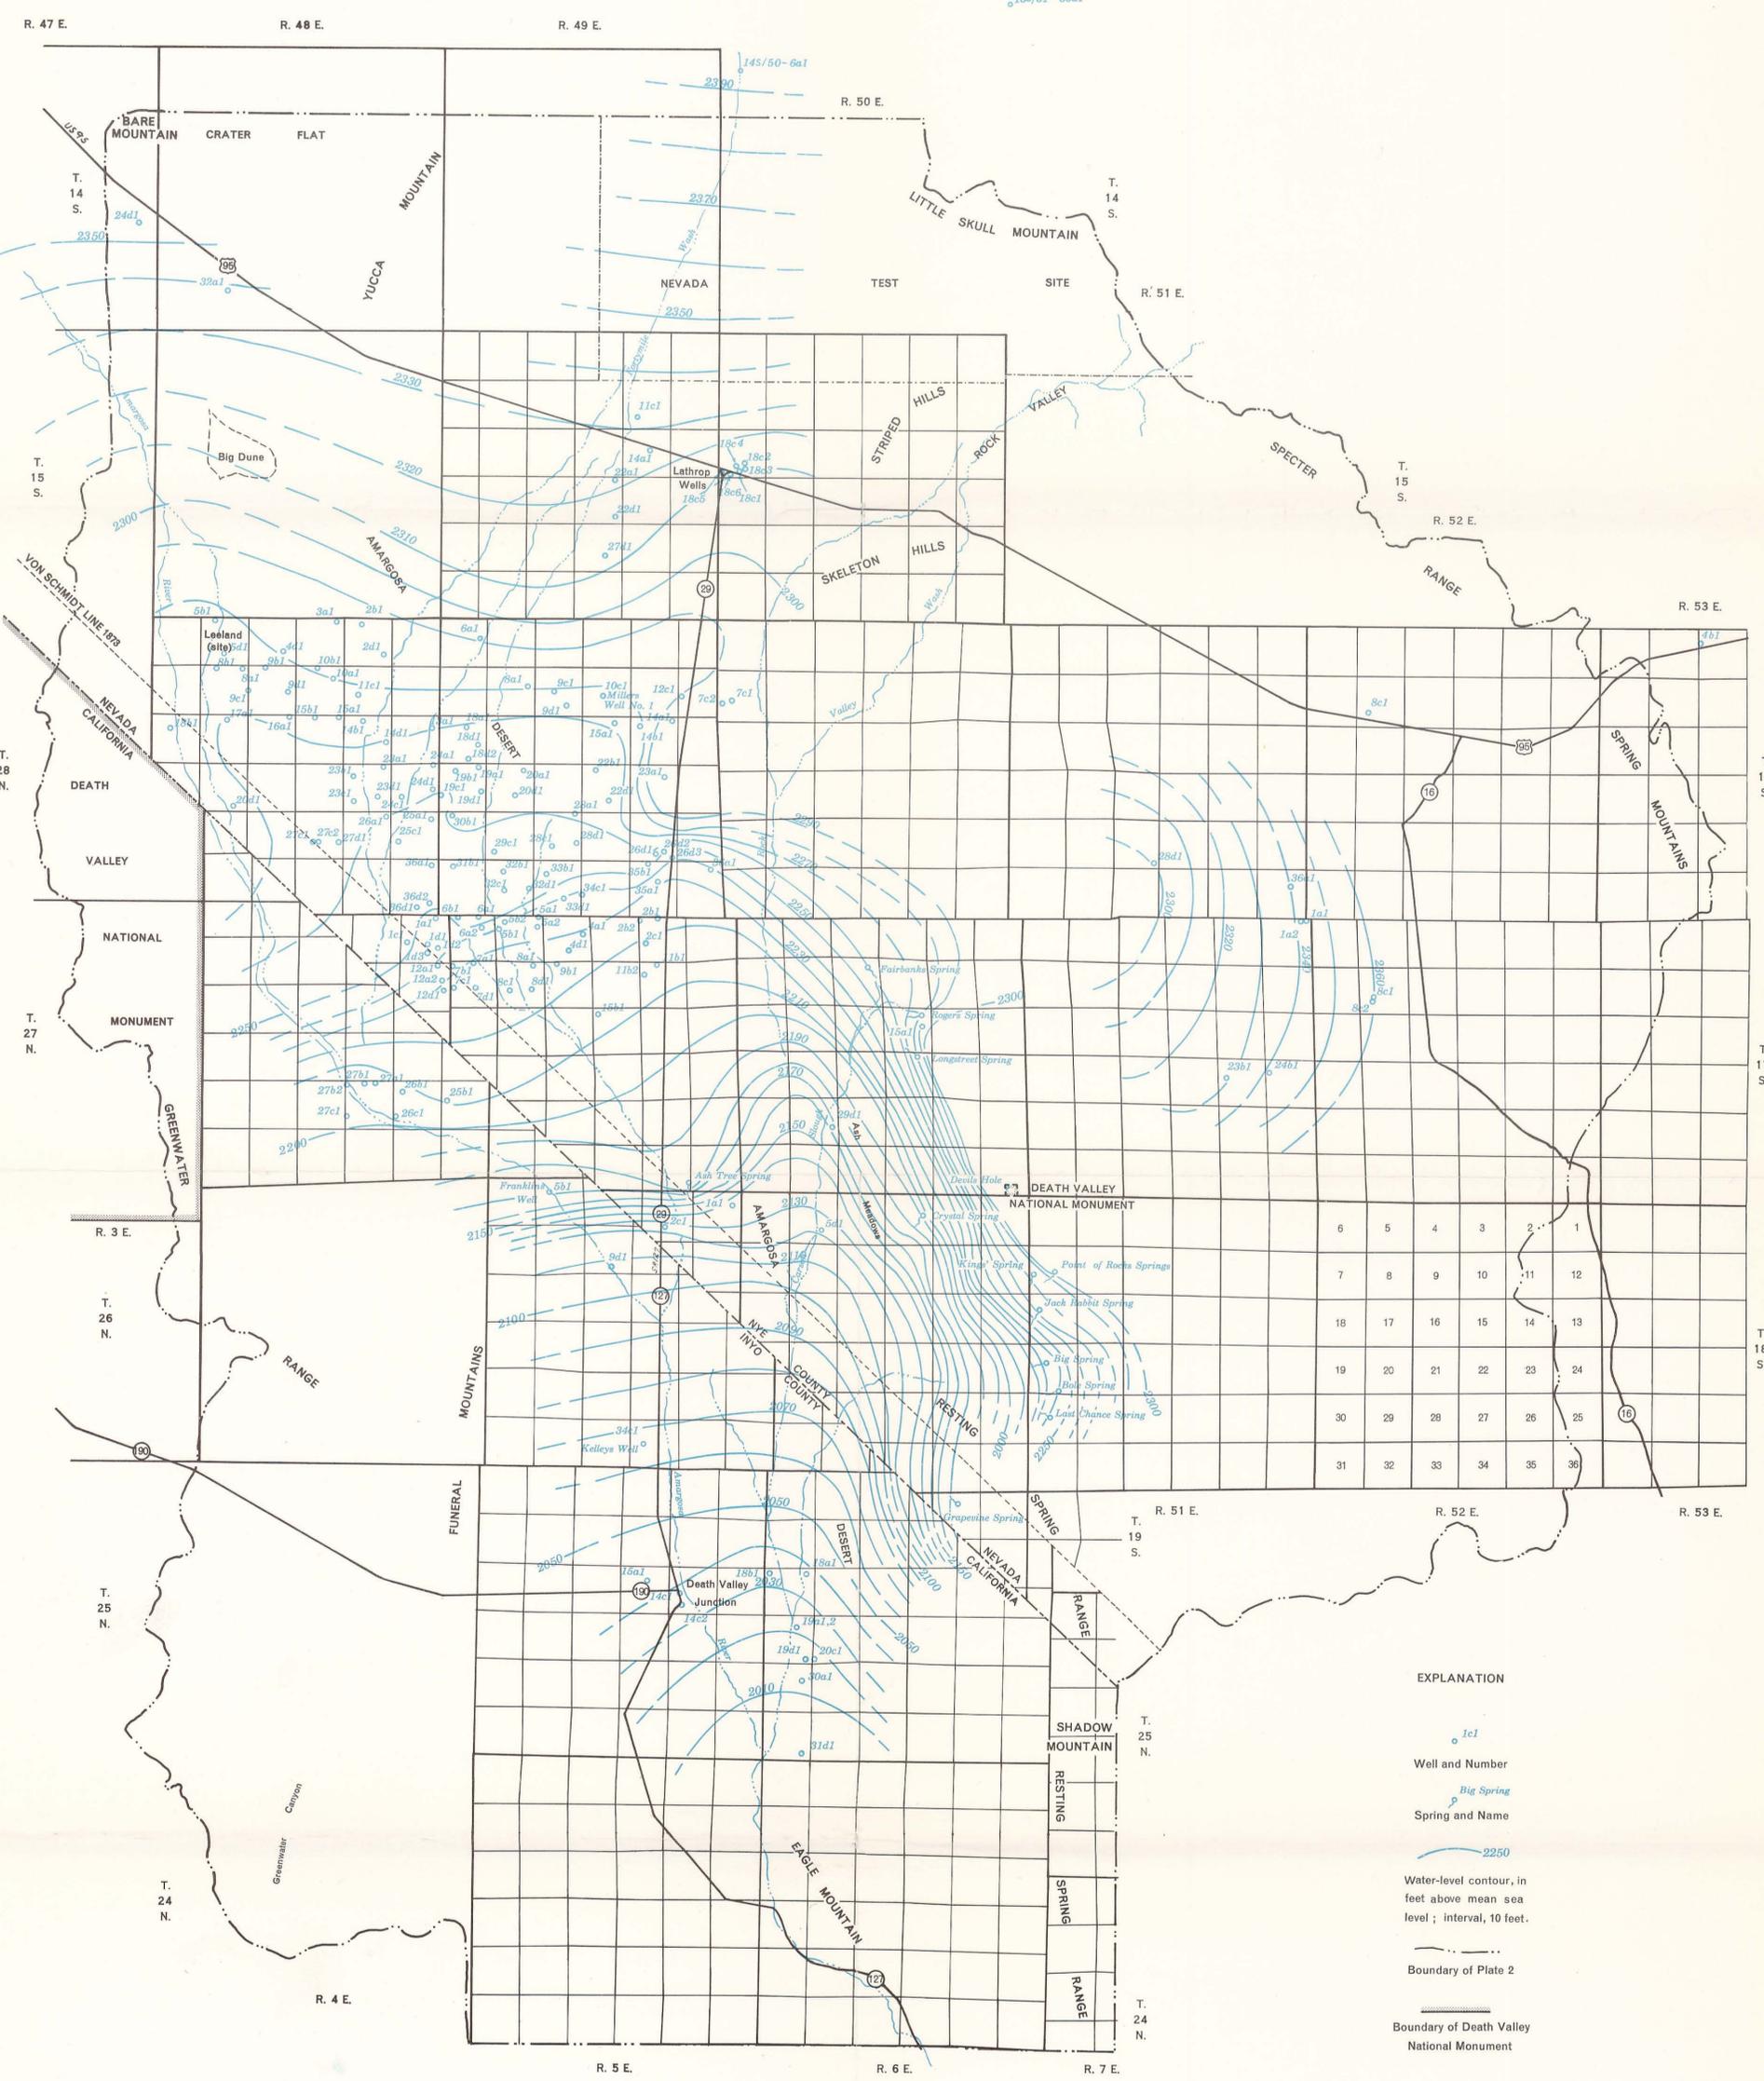

EXPLANATION

- Well and Number
- Spring and Name
- Water-level contour, in feet above mean sea level; interval, 10 feet.
- Boundary of Plate 2
- Boundary of Death Valley National Monument



December 1962

Hydrology by G. E. Walker and T. E. Eakin, 1962

PLATE 3. HYDROLOGIC MAP OF THE AMARGOSA DESERT IN THE VICINITY OF LATHROP WELLS, NEVADA AND DEATH VALLEY JUNCTION, CALIFORNIA SHOWING LOCATION OF WELLS AND SPRINGS, AND GENERALIZED WATER-LEVEL CONTOURS IN 1962

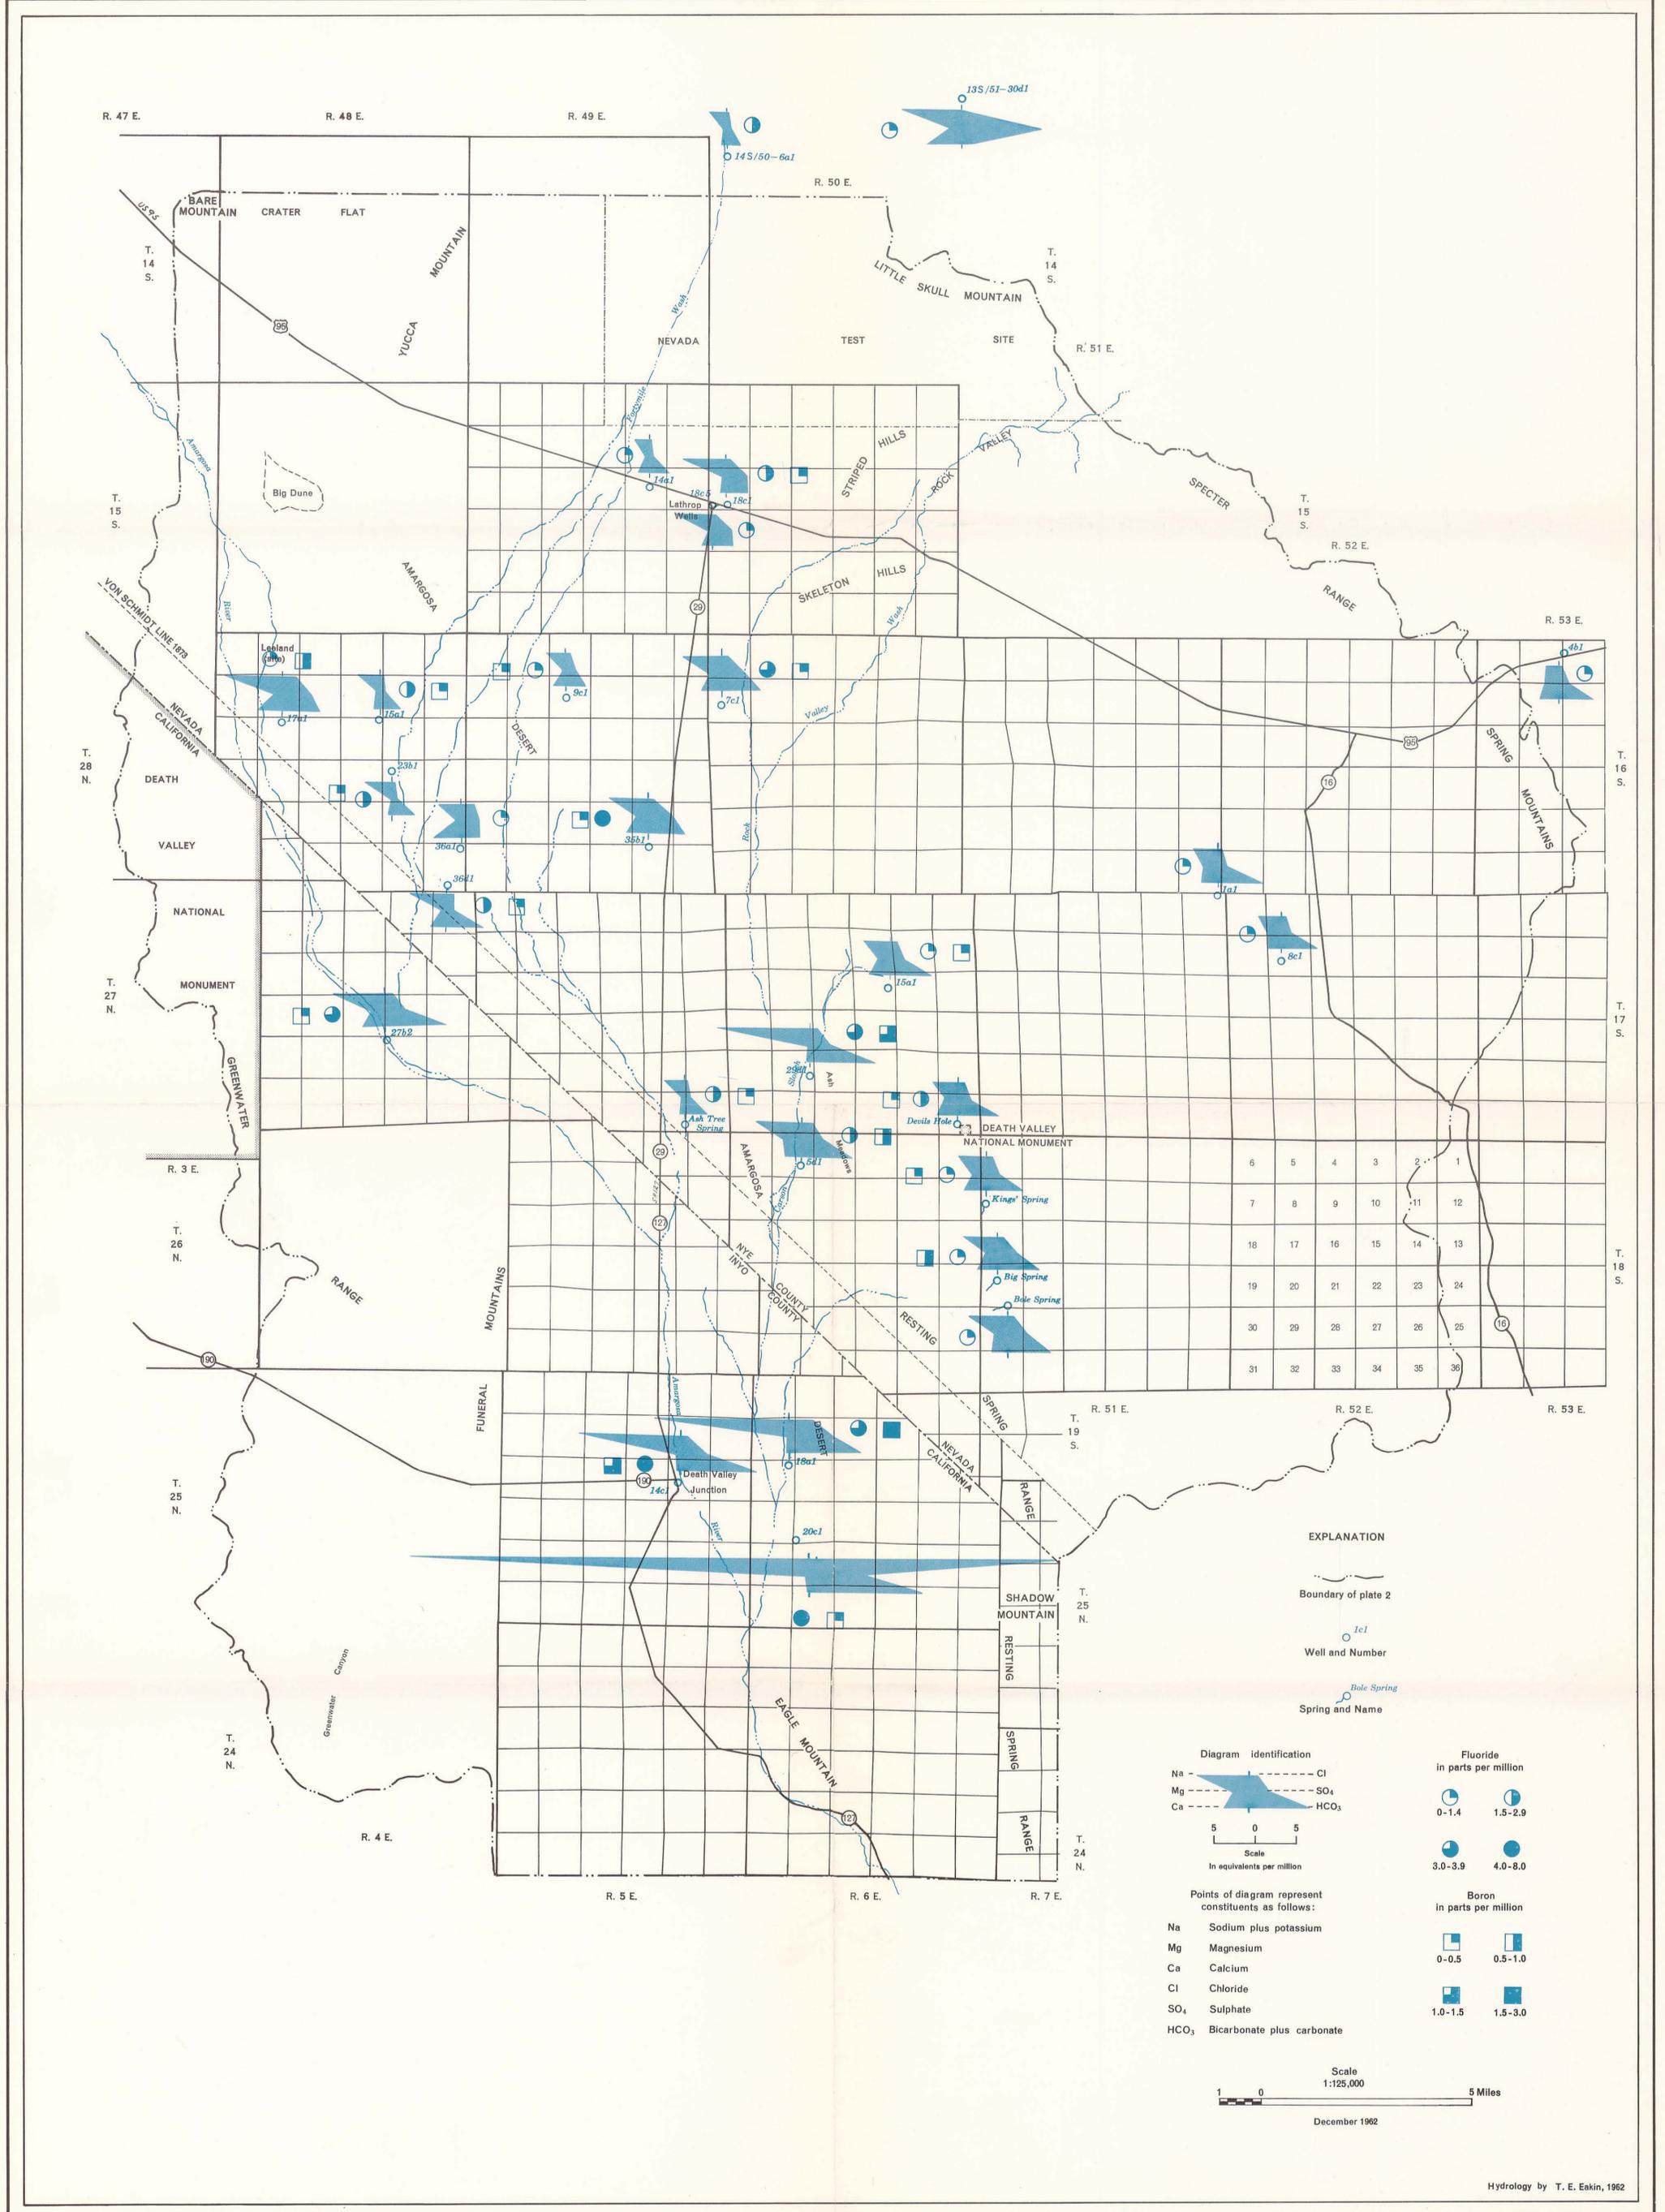


PLATE 4. MAP OF THE AMARGOSA DESERT IN THE VICINITY OF LATHROP WELLS, NEVADA AND DEATH VALLEY JUNCTION, CALIFORNIA, SHOWING DIAGRAMS REPRESENTING CHEMICAL QUALITY FOR WATER SAMPLES COLLECTED FROM SELECTED WELLS AND SPRINGS.