


STATE OF NEVADA  
DIVISION OF WATER RESOURCES  
**WELL DRILLER'S REPORT**

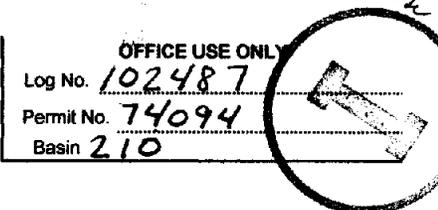

OFFICE USE ONLY  
Log No. 102487  
Permit No. 74094  
Basin 210

PRINT OR TYPE ONLY  
DO NOT WRITE ON BACK

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 54891

1. OWNER Coyote Springs Investment LLC ADDRESS AT WELL LOCATION 1 mile north of interscetion US 93 & SR168, 1mile east of SR168  
MAILING ADDRESS 300 S. 4th Street, Suite 1406  
CSI Well No.3 Las Vegas, NV 89101 Subdivision Name: NA County: Clark

2. LOCATION SW ¼ SE ¼ Sec 10 T 13S N/S R 63 E Latitude \_\_\_\_\_ UTM E  NAD 27  
PERMIT/WAIVER No. W-2110/ 74094 009-00-01-013 Longitude \_\_\_\_\_ N  NAD 83/WGS 84  
Issued by Water Resources Parcel No.

3. WORKED PERFORMED  New Well  Replace  Recondition  Deepen  Other  
4. PROPOSED USE  Domestic  Irrigation  Test  Monitor  Stock  
5. WELL TYPE  Cable  Rotary  RVC  Air  Other

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thick-ness
Sandy Gravel		0	35	35
Light tan gravel sand		35	100	65
Light tan sandy silt		100	320	220
Buff silty clay, discharge deposit		320	360	40
Light tan sandy silt		360	421	61
Medium gray limestone		421	685	264
Medium gray limestone, fractured	x	685	700	15
Medium gray limestone		700	752	52
Medium gray limestone, fractured	x	752	768	16
Dark gray limestone		768	909	141
Fractured limestone, calcite fill	x	909	956	47
Dark gray limestone	x	956	1000	44
Fractured limestone, calcite fill	x	1000	1012	12
Dark gray limestone		1012	1155	143

9. WELL CONSTRUCTION

Depth Drilled	1156	Feet	Depth Cased	1152	Feet
HOLE DIAMETER (BIT SIZE)					
	From		To		
48	Inches	0	Feet	40	Feet
40	Inches	40	Feet	421	Feet
30	Inches	421	Feet	1156	Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
32	127	0.375	+0.5	421
20.625	81	0.375	2.5	1152
TD inside casing 1147'		Cement Grout from	1147	1156

Perforations:

Type of perforation Full Flow louver, ASTM 606 type 4  
Size of perforation 0.150 inch

From 571.7 feet to 811.9 feet  
From 852.0 feet to 1132 feet  
From \_\_\_\_\_ feet to \_\_\_\_\_ feet  
From \_\_\_\_\_ feet to \_\_\_\_\_ feet  
From \_\_\_\_\_ feet to \_\_\_\_\_ feet

Annular Seal:  Yes  No

Neat Cement to \_\_\_\_\_  Pumped  Poured  
 Cement Grout 0 to 421  Pumped  Poured  
 Concrete Grout to \_\_\_\_\_  Pumped  Poured  
 ≥30% Bentonite Grout to \_\_\_\_\_  Pumped  Poured

Gravel Pack:  Yes  No 0 to 1135  Pumped  Poured  
Type: 3/8 x 1/4 Quartz pebbles, 185 tons

Bentonite Chips:  Yes  No to \_\_\_\_\_  Pumped  Poured  
Type: \_\_\_\_\_

Date started: 7-Jun 20 06  
Date completed: 30-Nov 20 06

7. Water Level  
Static water level: 511.94 feet below land surface  
Artesian Flow: \_\_\_\_\_ G.P.M. \_\_\_\_\_ P.S.I.  
Water Temperature: 96 °F  
Quality: \_\_\_\_\_

8. WELL TEST DATA

TEST METHOD:	G.P.M.	Draw Down (Feet Below Static)	Time (Hours)
<input type="checkbox"/> Bailer <input checked="" type="checkbox"/> Pump <input type="checkbox"/> Air Lift			
Constant Rate	3263	63.46	12

10. DRILLER'S CERTIFICATION

This well was drilled under my supervision and the report is true to the best of my knowledge.  
Name Layne-Christensen Company  
Contractor  
Address 11001 Etiwanda Ave, Fontana, CA 92337  
Contractor  
0019101  
Nevada contractor's license number  
issued by the State Contractor's Board 1964  
Nevada driller's license number issued by the  
Division of Water Resources, the on-site driller Victor Olveda  
Signed \_\_\_\_\_  
by driller performing actual drilling on site or contractor  
Date 2/14/07