


STATE OF NEVADA
DIVISION OF WATER RESOURCES
WELL DRILLER'S PLUGGING REPORT

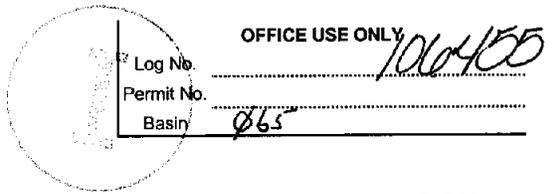

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

Please complete this form in its entirety in
accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 61360

1 OWNER Newmont Mining Corporation
MAILING ADDRESS PO Box 388
Valmy, NV 89435

ADDRESS AT WELL LOCATION Lone Tree Mine
Hole #WW-13
Subdivision Name: County: Humboldt

2 LOCATION SW 1/4 SE 1/4 Sec 11 T 34N N/S R 42 E
PERMIT/WAIVER No. 54763
Issued by Water Resources Parcel No.

Latitude 40.831521 UTM E 481965 NAD 27
Longitude 117.213994 N 4519865 NAD 83/WGS 84

3 TYPE OF WELL
 Domestic Irrigation Test
 Municipal/Industrial Monitor Stock

Is this well being plugged because a replacement well was drilled? No
If yes, what is replacement well NOI?

Is there an existing well log? Yes
If yes, what is NDWR well log #? 42677

4 EXISTING WELL CONSTRUCTION
Depth Drilled 1235 Feet Depth Cased 1230 Feet

7 WELL PLUGGING PROCEDURE
Was well cleaned out to total depth? yes no
If well was not cleaned out to total depth, please explain why:

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
40	159	.375	0	40
20	66	.3125	+2	240
20	66	.3125	640	720
20	66	.3125	800	840

Was the well contaminated? yes no
Was the casing pulled? yes no
Was the casing over drilled? yes no
If casing was left in place, please show where additional perforations were made:
Additional Perforations:

Existing Perforations:

Type of perforation	Size of perforation	From	To
Louver			
	240 feet to	640 feet	
	720 feet to	800 feet	
	840 feet to	1040 feet	
	1060 feet to	1220 feet	

Star

Type of perforator used	From	To	Number of perfs per linear foot
	55 feet to	240 feet	12
	240 feet to	640 feet	4
	640 feet to	720 feet	12
	720 feet to	800 feet	4
	800 feet to	840 feet	12
	840 feet to	1040 feet	4

5 WATER LEVEL
Static water level 537 feet below land surface
Artesian flow No G.P.M. N/A P.S.I.
Water temperature Cool °F Quality Rusty

8 WELL PLUGGING MATERIALS

From	To	Material Used	<input checked="" type="checkbox"/> Pumped	<input type="checkbox"/> Poured
1230 feet to	110 feet	Bentonite Grout	<input checked="" type="checkbox"/>	<input type="checkbox"/>
110 feet to	24 feet	3/4" Chip	<input type="checkbox"/>	<input checked="" type="checkbox"/>
24 feet to	0 feet	Neat Cement	<input type="checkbox"/>	<input checked="" type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>

6 Additional Notes or Comments
Additional Existing Casing Schedule:
Size: OD 20", Weight/Ft. 66, Wall Thickness .3125
from 1040' to 1060'
Size: OD 20", Weight/Ft. 66, Wall thickness .3125
from 1220' to 1230'
Additional Perforations:
From 1040' to 1060' 12 perfs per foot
From 1060' to 1220' 4 perfs per foot
From 1220' to 1230' 12 perfs per foot

Neat Cement Fluid Weight 15.3 lbs/gal
Bentonite Grout 12.5 % bentonite
Date Started 5/21/2008
Date Completed 5/28/2008

9 DRILLER'S CERTIFICATION
This well was plugged and abandoned under my supervision and the report is true to the best of my knowledge.
Name Eklund Drilling Company, Inc. Contractor
Address PO Box 2748 Contractor
Elko, NV 89803
Nevada contractor's license number issued by the State Contractor's Board 0030823
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 2347
Signed Abraham Schaeber By (Signature)
Date 5/30/2008

9 DRILLER'S CERTIFICATION
This well was plugged and abandoned under my supervision and the report is true to the best of my knowledge.
Name Eklund Drilling Company, Inc. Contractor
Address PO Box 2748 Contractor
Elko, NV 89803
Nevada contractor's license number issued by the State Contractor's Board 0030823
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 2347
Signed Abraham Schaeber By (Signature)
Date 5/30/2008