


STATE OF NEVADA
DIVISION OF WATER RESOURCES
WELL DRILLER'S PLUGGING REPORT

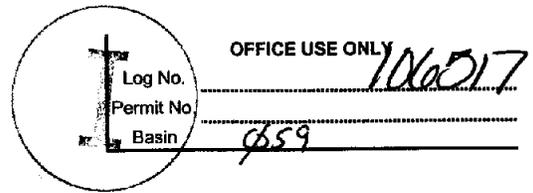

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

Please complete this form in its entirety in
accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 61336

1 OWNER Newmont Mining Corporation
MAILING ADDRESS PO Box 388
NW Valmy, NV 89435

ADDRESS AT WELL LOCATION Phoenix Mine
Hole #CM-32
Subdivision Name: County: Lander

2 LOCATION SW 1/4 SE 1/4 Sec 27 T 31N N/S R 43 E
PERMIT/WAIVER No. M/O - 6518
Issued by Water Resources Parcel No.

Latitude 40.5279 UTM E 375423.8
Longitude 117.11484 N 2103749.4
 NAD 83
 NAD 83/WGS 84

3 TYPE OF WELL
 Domestic Irrigation Test
 Municipal/Industrial Monitor Stock

Is this well being plugged because a replacement well was drilled? No
If yes, what is replacement well NOI?

Is there an existing well log? Yes
If yes, what is NDWR well log #? 45926 & 45924

4 EXISTING WELL CONSTRUCTION
Depth Drilled 460 Feet Depth Cased 260 Feet

7 WELL PLUGGING PROCEDURE
Was well cleaned out to total depth? yes no
If well was not cleaned out to total depth, please explain why:

| EXISTING CASING SCHEDULE | | | | |
|--------------------------|---------------------|-------------------------|-------------|-----------|
| Size O.D. (Inches) | Weight/Ft. (Pounds) | Wall Thickness (Inches) | From (Feet) | To (Feet) |
| 2 | PVC | Sch 80 | 0 | 260 |
| 1 | PVC | Sch 80 | 0 | 260 |

Was the well contaminated? yes no
Was the casing pulled? yes no
Was the casing over drilled? yes no
If casing was left in place, please show where additional perforations were made:
Additional Perforations:
Type of perforator used: N/A

Existing Perforations:

| From | Type of perforation | Size of perforation | feet to | feet |
|------|---------------------|---------------------|---------|----------|
| From | 2" 260 | | feet to | 460 feet |
| From | 1" 260 | | feet to | 460 feet |
| From | | | feet to | feet |
| From | | | feet to | feet |
| From | | | feet to | feet |

Additional Perforations:

| From | Type of perforator used: | feet to | feet | Number of perfs per linear foot |
|------|--------------------------|---------|------|---------------------------------|
| From | | feet to | feet | Number of perfs per linear foot |
| From | | feet to | feet | Number of perfs per linear foot |
| From | | feet to | feet | Number of perfs per linear foot |
| From | | feet to | feet | Number of perfs per linear foot |
| From | | feet to | feet | Number of perfs per linear foot |
| From | | feet to | feet | Number of perfs per linear foot |

5 WATER LEVEL
Static water level 201 feet below land surface
Artesian flow No G.P.M. N/A P.S.I.
Water temperature N/A °F Quality

8 WELL PLUGGING MATERIALS
Material Used
From 2" 260 feet to 0 feet Neat Cement Pumped Poured
From 1" 260 feet to 0 feet Neat Cement Pumped Poured
From feet to feet Pumped Poured

6 Additional Notes or Comments
Run trimmy in 2" PVC to 260' pumped down approx. 50 gallons of cement.
Poured down 1" well approximately 18 gallons of cement.

Neat Cement Fluid Weight 16.2 lbs/gal
Bentonite Grout % bentonite
Date Started 4/7/2008
Date Completed 4/7/2008

12-MAR-2008 11:21

9 DRILLER'S CERTIFICATION
This well was plugged and abandoned under my supervision and the report is true to the best of my knowledge.
Name Eklund Drilling Company, Inc. Contractor
Address PO Box 2748 Contractor
Elko, NV 89803
Nevada contractor's license number issued by the State Contractor's Board 0030823
Nevada driller's license number issued by the Division of Water Resources, the on-site driller M-1769
Signed Warren Hartley By driller performing actual drilling on site or contractor
Date 4/30/2008