

STATE OF NEVADA  
DIVISION OF WATER RESOURCES  
WELL DRILLER'S REPORT

OFFICE USE ONLY  
Log No. 107813  
Permit No. \_\_\_\_\_  
Basin 212

PRINT OR TYPE ONLY  
DO NOT WRITE ON BACK

Please complete this form in its entirety in  
accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 34869

1. OWNER Subdivision Common Area (non assessed)  
MAILING ADDRESS 500 South Grand Central Parkway  
Lv, NV 89101

ADDRESS AT WELL LOCATION Common Area @ south end  
of Theme Rd Alignment  
Subdivision Name: \_\_\_\_\_ County: Clark

2. LOCATION S 1/2 NE 1/4 Sec 15 T 21S N 3/4 R 62 E  
PERMIT/WAIVER No. DW-1267 16115897024  
Issued by Water Resources Parcel No.

Latitude \_\_\_\_\_ UTM E \_\_\_\_\_  NAD 27  
Longitude \_\_\_\_\_ N \_\_\_\_\_  NAD 83/WGS 84

3. WORKED PERFORMED  
 New Well  Replace  Recondition  
 Deepen  Other

4. temp demetering PROPOSED USE  
 Domestic  Irrigation  Test  
 Municipal/Industrial  Monitor  Stock

5. WELL TYPE  
 Cable  Rotary  RVC  
 Air  Other

6. LITHOLOGIC LOG				
Material	Water Strata	From	To	Thick-ness
SEE ATTACHED				
MH # 7				
MAR 24 2008				

9. WELL CONSTRUCTION				
Depth Drilled	30	Feet	Depth Cased	30
HOLE DIAMETER (BIT SIZE)				
	From	To		
	24	0	30	Feet
	Inches	Feet	Feet	Feet
	Inches	Feet	Feet	Feet

CASING SCHEDULE				
Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
8	6	3/8	0	30

Perforations:  
Type of perforation machine  
Size of perforation 0.032  
From 10 feet to 30 feet  
From \_\_\_\_\_ feet to \_\_\_\_\_ feet  
From \_\_\_\_\_ feet to \_\_\_\_\_ feet  
From \_\_\_\_\_ feet to \_\_\_\_\_ feet

Annular Seal:  Yes  No  
 Neat Cement to \_\_\_\_\_  Pumped  Poured  
 Cement Grout to \_\_\_\_\_  Pumped  Poured  
 Concrete Grout to \_\_\_\_\_  Pumped  Poured  
 ≥30% Bentonite Grout 10 to 12  Pumped  Poured

Gravel Pack:  Yes  No 12 to 30  Pumped  Poured  
Type: 3/8's pea gravel  
Bentonite Chips:  Yes  No 10 to 12  Pumped  Poured  
Type: 3/8's chips

Date started: 2-5-8, 20  
Date completed: 2-5-8, 20

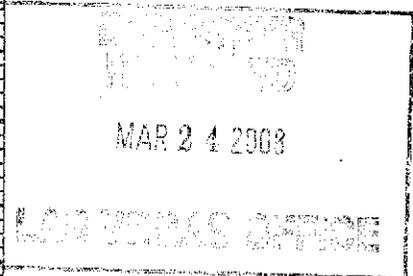
7. Water Level  
Static water level: \_\_\_\_\_ feet below land surface  
Artesian Flow: \_\_\_\_\_ G.P.M. \_\_\_\_\_ P.S.I.  
Water Temperature: \_\_\_\_\_ °F  
Quality: \_\_\_\_\_

8. WELL TEST DATA			
TEST METHOD:	G.P.M.	Draw Down (Feet Below Static)	Time (Hours)
<input type="checkbox"/> Bailor <input type="checkbox"/> Pump <input type="checkbox"/> Air Lift			

10. DRILLER'S CERTIFICATION  
This well was drilled under my supervision and the report is true to the best of my knowledge.  
Name Viking Drillers Inc.  
Contractor  
Address 801 Northport Dr.  
Contractor  
West Sacramento, CA 95691  
Nevada contractor's license number \_\_\_\_\_  
issued by the State Contractor's Board 0034680  
Nevada driller's license number issued by the \_\_\_\_\_  
Division of Water Resources, the on-site driller m-2091  
Signed \_\_\_\_\_  
By driller performing actual drilling on site or contractor  
Date 3/12/08

THIS BORING LOG IS FOR VIKING'S INTERNAL PURPOSES ONLY. IT DOES NOT REPRESENT INFORMATION PROVIDED BY A SOILS ENGINEER.

LOG FOR BORING NO. #7		JOB NAME: Las Vegas <i>Rowing</i>			
DATE STARTED 3/4/08	DATE COMPLETED 3/4/07	LOGGED BY EB	DRILLED BY GB	TYPE OF DRILL RIG #36	JOB NO. 1058
DEPTH OF HOLE 30'	DIAMETER OF HOLE 24"	CASING 8"	PERFORATIONS 20'	SAMPLING METHOD	ELEVATION
LOCATION END OF LINE @ The WASH. on Theme				DRILLERS NOTES: Alignment LA PH 16115897024	
DEPTH	SAMPLES	GRAPHIC	DESCRIPTION		
10'			PRE LUG CLAY		
20'			CLAY		
			BASE ROCK		
			SILTY SAND		
30'			CLAY		
40'					
50'					
60'					
70'					
80'					
90'					
100'					


  
 EXAMINED BY [signature]  
 MAR 24 2008  
 LAS VEGAS OFFICE