

Log# 108466



McGinley & Associates
www.mcgin.com

Project #: GGP-002

Log: MW-3

Project: Baldini's Grand Pavilion

Client: Monte Baldwin

Supervisor: L. Johnson

Site Location: 1055 Rock Blvd, Sparks, NV Reviewed by: T. Johnston

SAMPLES/LITHOLOGIC/MEASUREMENTS					BOREHOLE/WELL	
Depth (ft/gs)	Sample Interval	Lithologic Symbol	Lithologic Description	PID (ppm)	Water Levels	Construction/Completion Schematic
0			Ground Surface			
			Asphalt			
1			Fill			
2						
3			Well-Graded GRAVEL (GW)			
4			Reddish brown to light gray, moist to dry, no petroleum odor. 55% fine to coarse, angular to subrounded, gravel with clasts up to 4". 40% fine to coarse, angular to subangular sand. 5% fines, silt, nonplastic.			
5						
6			GRAVEL w/ Sand, Silt (GW-GM)			
7			Light gray, dry, no petroleum odor. 55% fine to coarse, angular to subrounded, gravel with cobbles up to 6". 30% fine to coarse, angular to subangular, sand. 15% fines, silt, nonplastic.			
8						
9						
10						
11						
12						
13						
14						
15						
16						
17			GRAVEL w/ clay (GW-GC)			
18			Light gray to grayish brown, dry to wet, no petroleum odor. 50% fine to coarse, angular to subrounded, gravel with cobbles up to 6". 35% fine to coarse, angular to subrounded, sand. 15% fines, silt and clay, low plasticity.			
19						
20						

Driller: Cascade Drilling, Inc.

Hole Diameter: 5 1/2"

Well Casing: 2" Sch 40 PVC

Method: Sonic

Elevation: 4424.10

Well Screen: 0.02-inch slot

Date: 27-Jul-09

Northing: 14863715.1

Well Screen: 3 Monterey Sand

Easting: 2290706.2

Seal: Bentonite

Note: Lithology based on soil samples and rig observations.

STATE ENGINEERS OFFICE

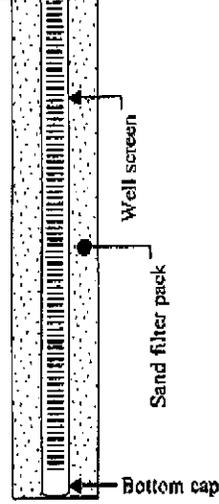
RECEIVED
SEP 8 8 13 PM '09

Log # 108466

Project #: GGP-002

Log (Cont.): MW-3

www.mcgin.com

SAMPLES/LITHOLOGIC/MEASUREMENTS					BOREHOLE/WELL	
Depth (ft/gs)	Sample Interval	Lithologic Symbol	Lithologic Description	PID (ppm)	Water Levels	Construction/Completion Schematic
21						
22			<p><i>Well-Graded GRAVEL (GW)</i> Grayish brown, wet, no petroleum odor. 50% fine to coarse, angular to subrounded gravel with clasts up to 3". 45% coarse, angular to subrounded, sand. 5% or less fines, silt, nonplastic.</p>			
23						
24						
25						
26						
27						
28						
29						
30			End of Borehole			
31						
32						
33						
34						
35						
36						
37						
38						
39						
40						
41						
42						
43						
44						
45						
46						
47						
48						
49						
50						

STATE ENGINEERS OFFICE

2009 SEP - 8 PM 1: 35

RECEIVED