WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY
NDEP #4-000061
PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 109728
Permit No.
Basin 090 pg 1 of 3

NOTICE OF INTENT NO. 60455

1. OWNER Chevron Env. Management Co. ADDRESS AT WELL LOCATION 947 Tahoe Blvd
MAILING ADDRESS 6001 Bollinger Cyn Rd Incline Village, NV 89451
San Ramon, CA 94583

2. LOCATION NW ¼ NE ¼ Sec. 15 T. 16 N/S R. 18 E. Washoe County
PERMIT NO. Issued by Water Resources | 132-231-10 Parcel No. | Incline Subdivision Name

3. WORK PERFORMED
☑ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Abandon ☐ Other

4. PROPOSED USE Air Sparge
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☑ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☐ Rotary ☐ RVC
☐ Air ☑ Other Sonic

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
reddish brn sand w/gravel		0	8	8
brn sand w/gravel fine to coarse		8	19	11
brn sand w/ silt & cl, some gravel		19	29	10
brn silty cl w/gravel		29	32	3
brn sand wet fine to med trace cl	32	32	37	5
greyish br sand w/ silt & cl		37	46	9

AG-5

N: 1476760.37 NAD 83
E: 2238979.83
39.258499°N
119.944469°W NAD 27

Date started 7-19, 20 07
Date completed 7-20, 20 07

7. WELL TEST DATA
TEST METHOD: ☐ Bailer ☐ Pump ☐ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)
1/4	35	1.5

8. WELL CONSTRUCTION
Depth Drilled 46 Feet Depth Cased 38.5 Feet

HOLE DIAMETER (BIT SIZE)

	From	To
6 Inches	0 Feet	46 Feet
Inches	Feet	Feet
Inches	Feet	Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
2 3/8	Schd 80		0	38.5

Perforations:
Type perforation Slotted
Size perforation .020
From 37 feet to 38 feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☑ Yes ☐ No
Depth of Seal 1'-34 / 34-36
Placement Method: ☐ Pumped ☑ Poured med chips
Seal Type: ☐ Neat Cement ☑ Cement Grout ☐ Concrete Grout

Gravel Packed: ☑ Yes ☐ No
From 36 feet to 38.5 feet

9. WATER LEVEL
Static water level 31.7 feet below land surface
Artesian flow — G.P.M. — P.S.I.
Water temperature C °F Quality

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name Mario Romero / Prosonic Contractor
Address 12464 McCann Dr Contractor
Santa Fe Springs CA 90670
Nevada contractor's license number issued by the State Contractor's Board 0057765
Nevada driller's license number issued by the Division of Water Resources, the on-site driller M-2313
Signed By driller performing actual drilling on site or contractor
Date 8-23-07

RECEIVED 2007 OCT -1 AM 10:09
RECEIVED 2007 OCT 10 AM 10:15

(Rev. 12-01) USE ADDITIONAL SHEETS IF NECESSARY (O)-627

Log# 1097228 pg2of3

Map of Site:

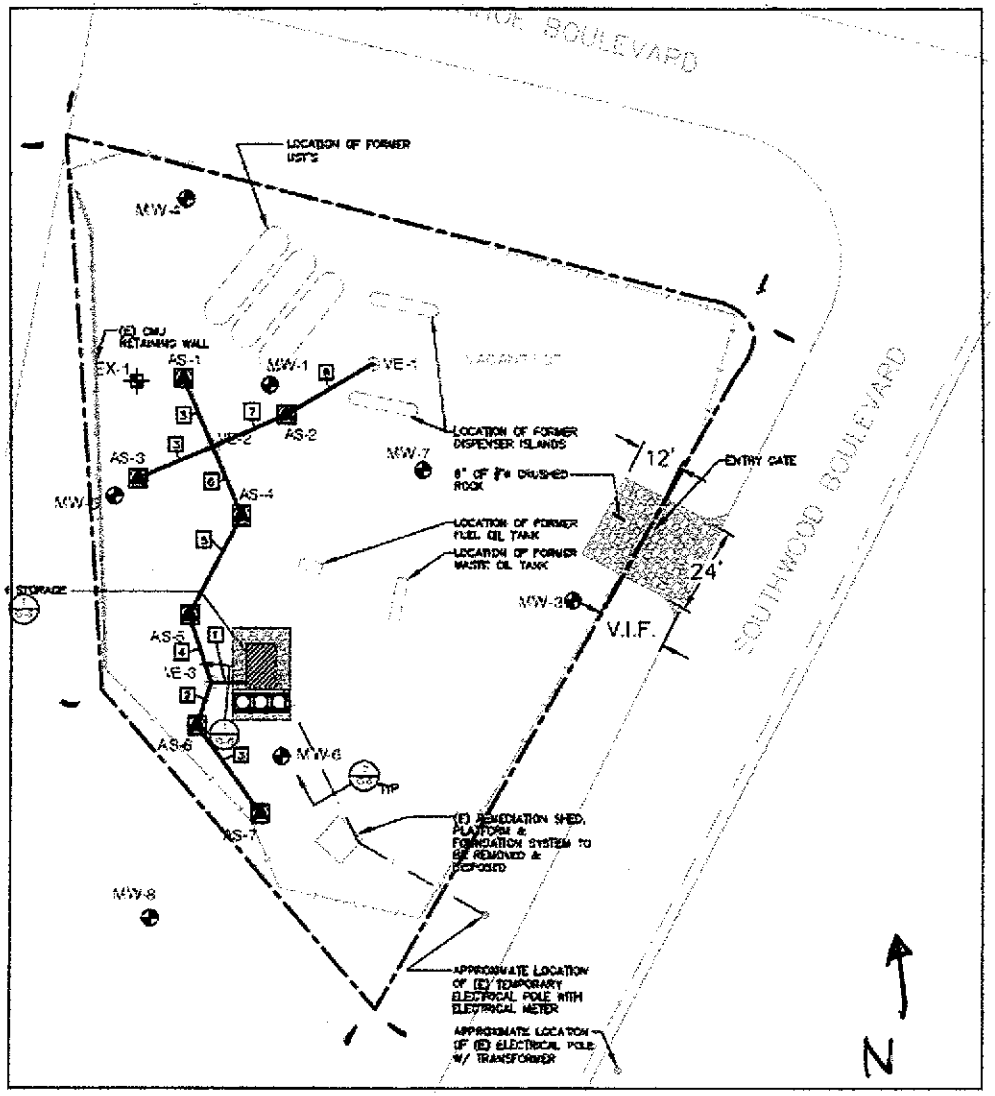

RECEIVED
2008 JUL 10 AM 10: 15
STATE ENGINEERS OFFICE

RECEIVED
2007 OCT -1 AM 10: 09
STATE ENGINEERS OFFICE

Log# 109728 pg 3 of 3

SECOR

JOB NAME _____
JOB NO. _____
CALCULATED BY _____ DATE _____
CHECKED BY _____ DATE _____
SHEET _____ OF _____

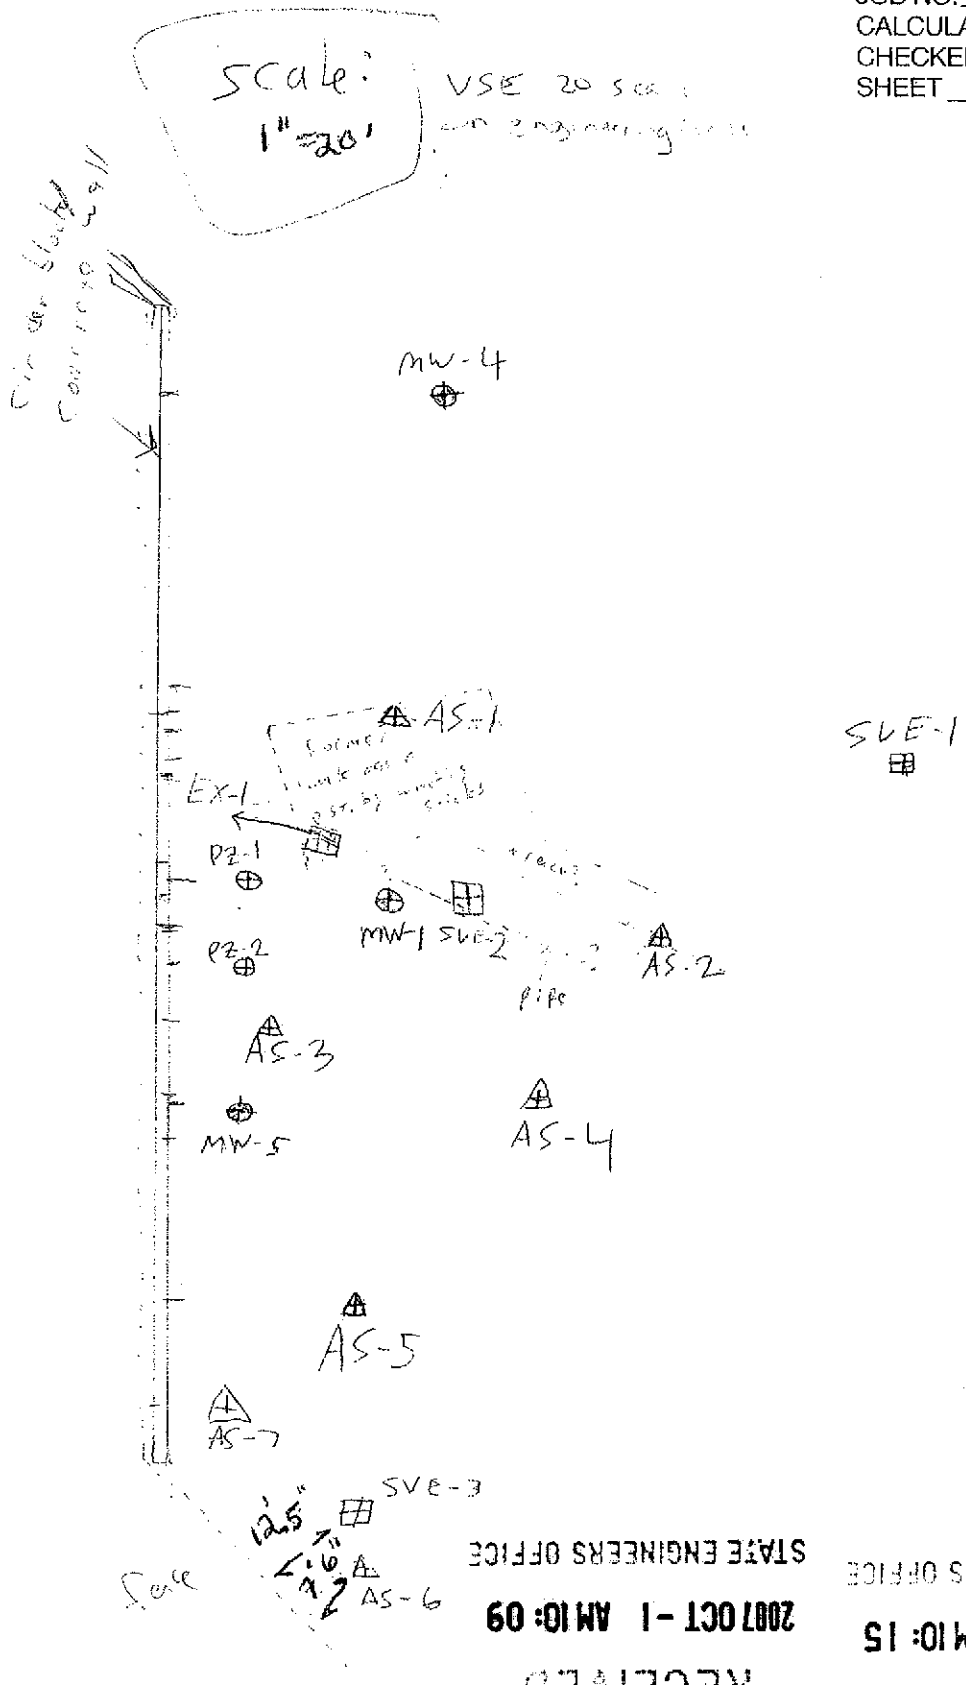

RECEIVED
2008 JUL 10 AM 10: 15
STATE ENGINEERS OFFICE

RECEIVED
2007 OCT -1 AM 10: 09
STATE ENGINEERS OFFICE