WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY
NDEP #4-000061
PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 109730
Permit No.
Basin Ø9Ø pg 1 of 3

NOTICE OF INTENT NO. 60452

1. OWNER Chevron Env. Management Co.
MAILING ADDRESS 6001 Bollinger Cyn Rd
San Ramon, CA 94583
ADDRESS AT WELL LOCATION 947 Tahoe Blvd.
Incline Village, NV 89451

2. LOCATION NW ¼ NE ¼ Sec. 15 T. 16 N/S R. 18 E. Washoe County
PERMIT NO. (Issued by Water Resources) 132-231-10 (Parcel No.) Incline (Subdivision Name)

3. WORK PERFORMED
☑ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Abandon ☐ Other

4. PROPOSED USE Air Sparge
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☑ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☐ Rotary ☐ RVC
☐ Air ☐ Other Sonic

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
brn sand w/some Gravel		0	10	10
brn gravel fine to coarse some cobbles		10	17	7
brnish grey Sand w/ some gravel, cobbles		17	24	7
Greyish br silty CL		24	29	5
Brn Sand med coarse, moist		29	31	2
brn sand med coarse	31	31	34	3
Gr to Drk Gr Sand w Gravel & some silt		34	39	5
Drd Grey Sand med to coarse		39	46	7

AS-4

N:14767627.88 NAD 83
E:2238998.05
39.258546°N
119.944406°W NAD 27 (TM)

Date started 7-18, 2007
Date completed 7-18, 2007

7. WELL TEST DATA
TEST METHOD: ☑ Bailer ☑ Pump ☐ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)
2.5	36' 4"	1 Hr

STATE ENGINEER'S OFFICE
2007 OCT -1 AM 10:09
2008 JUL 10 AM 10:15
RECEIVED RECEIVED

8. WELL CONSTRUCTION
Depth Drilled 46 Feet Depth Cased 45.5 Feet

HOLE DIAMETER (BIT SIZE)
8 Inches From 0 Feet To 46 Feet
Inches Feet Feet
Inches Feet Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
2 3/8	Schd	80	0	45.5

Perforations:
Type perforation Slotted
Size perforation .020
From 44 feet to 45 feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☑ Yes ☐ No
Depth of Seal 1'-41 / 41-43
Placement Method: ☐ Pumped ☑ Poured med chips
Seal Type: ☐ Neat Cement ☑ Cement Grout ☐ Concrete Grout
Gravel Packed: ☑ Yes ☐ No
From 43 feet to 45.5 feet

9. WATER LEVEL
Static water level 31.2 feet below land surface
Artesian flow — G.P.M. — P.S.I.
Water temperature C °F Quality

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name Mario Romero / Prosonic (Contractor)
Address 12464 McCann Dr (Contractor)
Santa Fe Springs, CA
Nevada contractor's license number issued by the State Contractor's Board 0051765
Nevada driller's license number issued by the Division of Water Resources, the on-site driller M-2313
Signed [signature] By driller performing actual drilling on site or contractor
Date 8-23-07

(Rev. 12-01) USE ADDITIONAL SHEETS IF NECESSARY (O)-627

Map of Site:

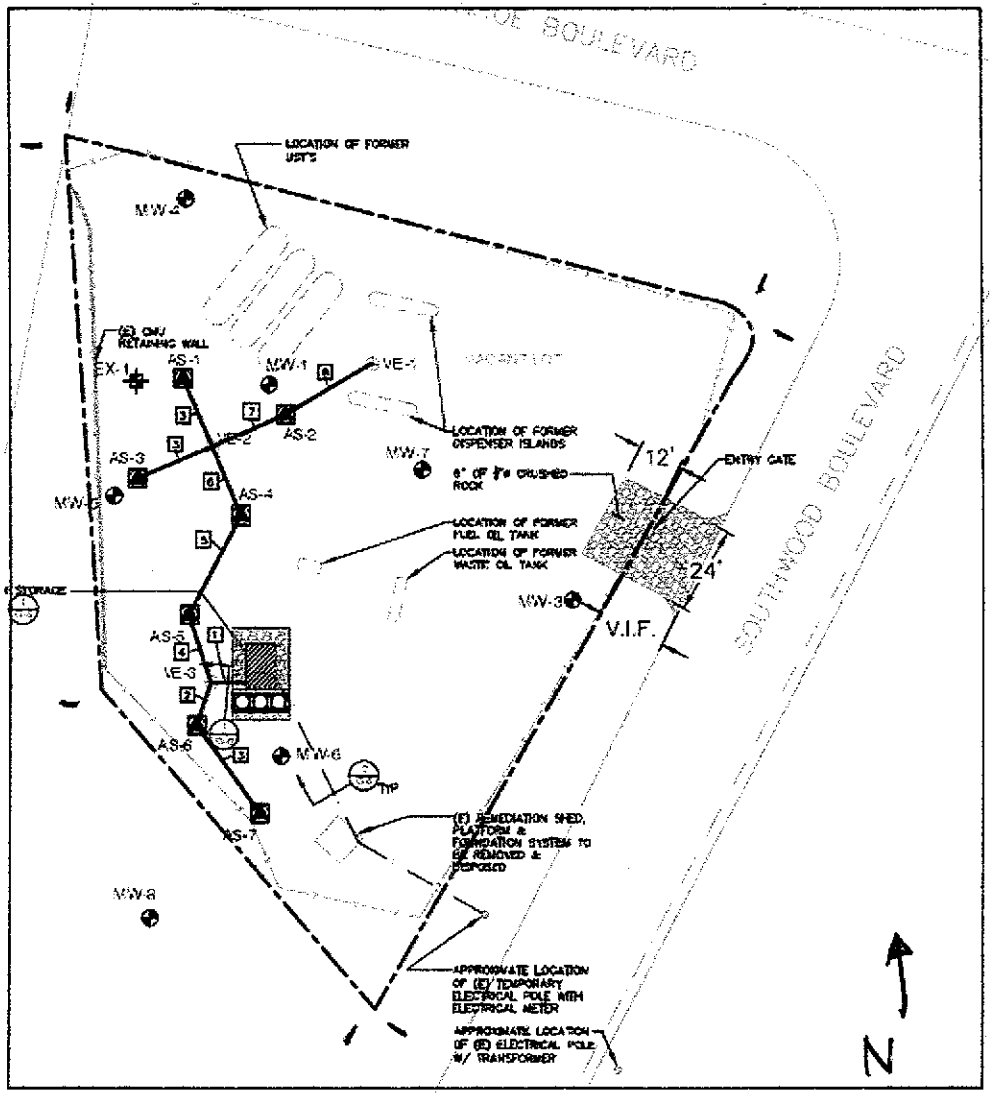

RECEIVED
2007 OCT -1 AM 10: 09
STATE ENGINEERS OFFICE

RECEIVED
2008 JUL 10 AM 10: 15
STATE ENGINEERS OFFICE

Log # 109730
Page 3 of 3

Log # 109730 pg 3 of 3

SECOR

JOB NAME _____
JOB NO. _____
CALCULATED BY _____ DATE _____
CHECKED BY _____ DATE _____
SHEET _____ OF _____

Scale: 1" = 20'

VSE 20 scale on engineering

MW-4

AS-1

SVE-1

EX-1

PZ-1

PZ-2

MW-1

SVE-2

AS-2

pipe

AS-3

MW-5

AS-4

AS-5

AS-7

SVE-3

12.5'

N

RECEIVED
2008 JUL 10 AM 10:15
STATE ENGINEERS OFFICE

RECEIVED
2007 OCT -1 AM 10:09
STATE ENGINEERS OFFICE