

STATE OF NEVADA
DIVISION OF WATER RESOURCES
WELL DRILLER'S PLUGGING REPORT

OFFICE USE ONLY
Log No. 118009
Permit No. 661
Basin 661

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

Please complete this form in its entirety in
accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 68540

1 OWNER BARRICK GOLDSTRIKE
MAILING ADDRESS PO BOX 29
ELKO, NV 89803

ADDRESS AT WELL LOCATION BARRICK GOLDSTRIKE MINESITE
Subdivision Name: _____ County: EUREKA

2 LOCATION SW 1/4 SE 1/4 Sec 17 T 36 N/S/R 50 E
PERMIT/WAIVER No. _____
Issued by Water Resources _____ Parcel No. _____

Latitude _____ UTM E 11T0555338 NAD 27
Longitude _____ N 4537799 NAD 83/WGS 84

3 TYPE OF WELL
 Domestic Irrigation Test
 Municipal/Industrial Monitor Stock

Is this well being plugged because a replacement well was drilled? NO
If yes, what is replacement well NOI? _____
Is there an existing well log? _____
If yes, what is NDWR well log #? _____

4 EXISTING WELL CONSTRUCTION
Depth Drilled 550 Feet Depth Cased 550 Feet

7 WELL PLUGGING PROCEDURE
Was well cleaned out to total depth? yes no
If well was not cleaned out to total depth, please explain why: ARTESIAN

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
<u>2"</u>			<u>71</u>	<u>550</u>

Was the well contaminated? yes no
Was the casing pulled? yes no
Was the casing over drilled? yes no
If casing was left in place, please show where additional perforations were made:
Additional Perforations: _____

Existing Perforations:

From	Type of perforation	Size of perforation	feet to	feet
	<u>Mill slot</u>	<u>1/8 inch</u>	<u>245</u>	<u>545</u>

Type of perforator used:

From	feet to	feet	Number of perfs per linear foot

5 WATER LEVEL
Static water level _____ feet below land surface
Artesian flow 3.6 GPM G.P.M. 1.0 P.S.I.
Water temperature _____ °F Quality _____

8 WELL PLUGGING MATERIALS

From	feet to	feet	Material Used	<input type="checkbox"/> Pumped	<input type="checkbox"/> Poured

6 Additional Notes or Comments
HOOKED UP THE GEOLOOP GROUT PUMP TO THE GATE VALVE AT THE TOP OF THE CASING HOLE HAD 10 PSI AND WAS AN ARTESIAN AT 3GPM MIXED UP ABANDONMENT SLURRY SUPER PLUG AND BARITE. PUMPED THE SLURRY, PRESSURED IT UP INTO THE FORMATION PUMPED NEAT CEMENT FROM 50' TO SURFACE MIXED 400 GALLONS OF WATER TO 15 BAGS (50LBS EA) OF SUPER PLUG & 15 BAGS (100LBS EA) OF BARITE USED 600 GALLONS OF SLURRY AND NEAT CEMENT FROM 50' TO SURFACE WEIGHT: 10.3LBS PER GAL

Neat Cement Fluid Weight _____ lbs/gal
Bentonite Grout _____ % bentonite
Date Started 12/22/2011
Date Completed 12/22/2011

9 DRILLER'S CERTIFICATION
This well was plugged and abandoned under my supervision and the report is true to the best of my knowledge.
Name ROBERT OESCHGER Contractor
Address 5905 SKY TERRACE CT Contractor
RENO, NV 89511
Nevada contractor's license number issued by the State Contractor's Board 0048915A
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 1670
Signed [Signature] By driller performing actual drilling or site or contractor
Date 12-22-2011

USE ADDITIONAL SHEETS IF NECESSARY

40.991401° N
116.342115° W
VA027


(Rev. 05-06)

log# 30823 Basin #61

MONITORING WELL		PROJECT	NEWMONT GOLD COMPANY	WELL NO.
JOB NO.	SITE	COORDINATES		PWE-5

.9547	POST AREA	N 15955; E 19101		
BEGUN	COMPLETED	HYDROGEOLOGIST	REFERENCE POINT FOR MEASUREMENTS	

11/6/88	11/8/88	G. A. DAY	GROUND SURFACE	
---------	---------	-----------	----------------	--

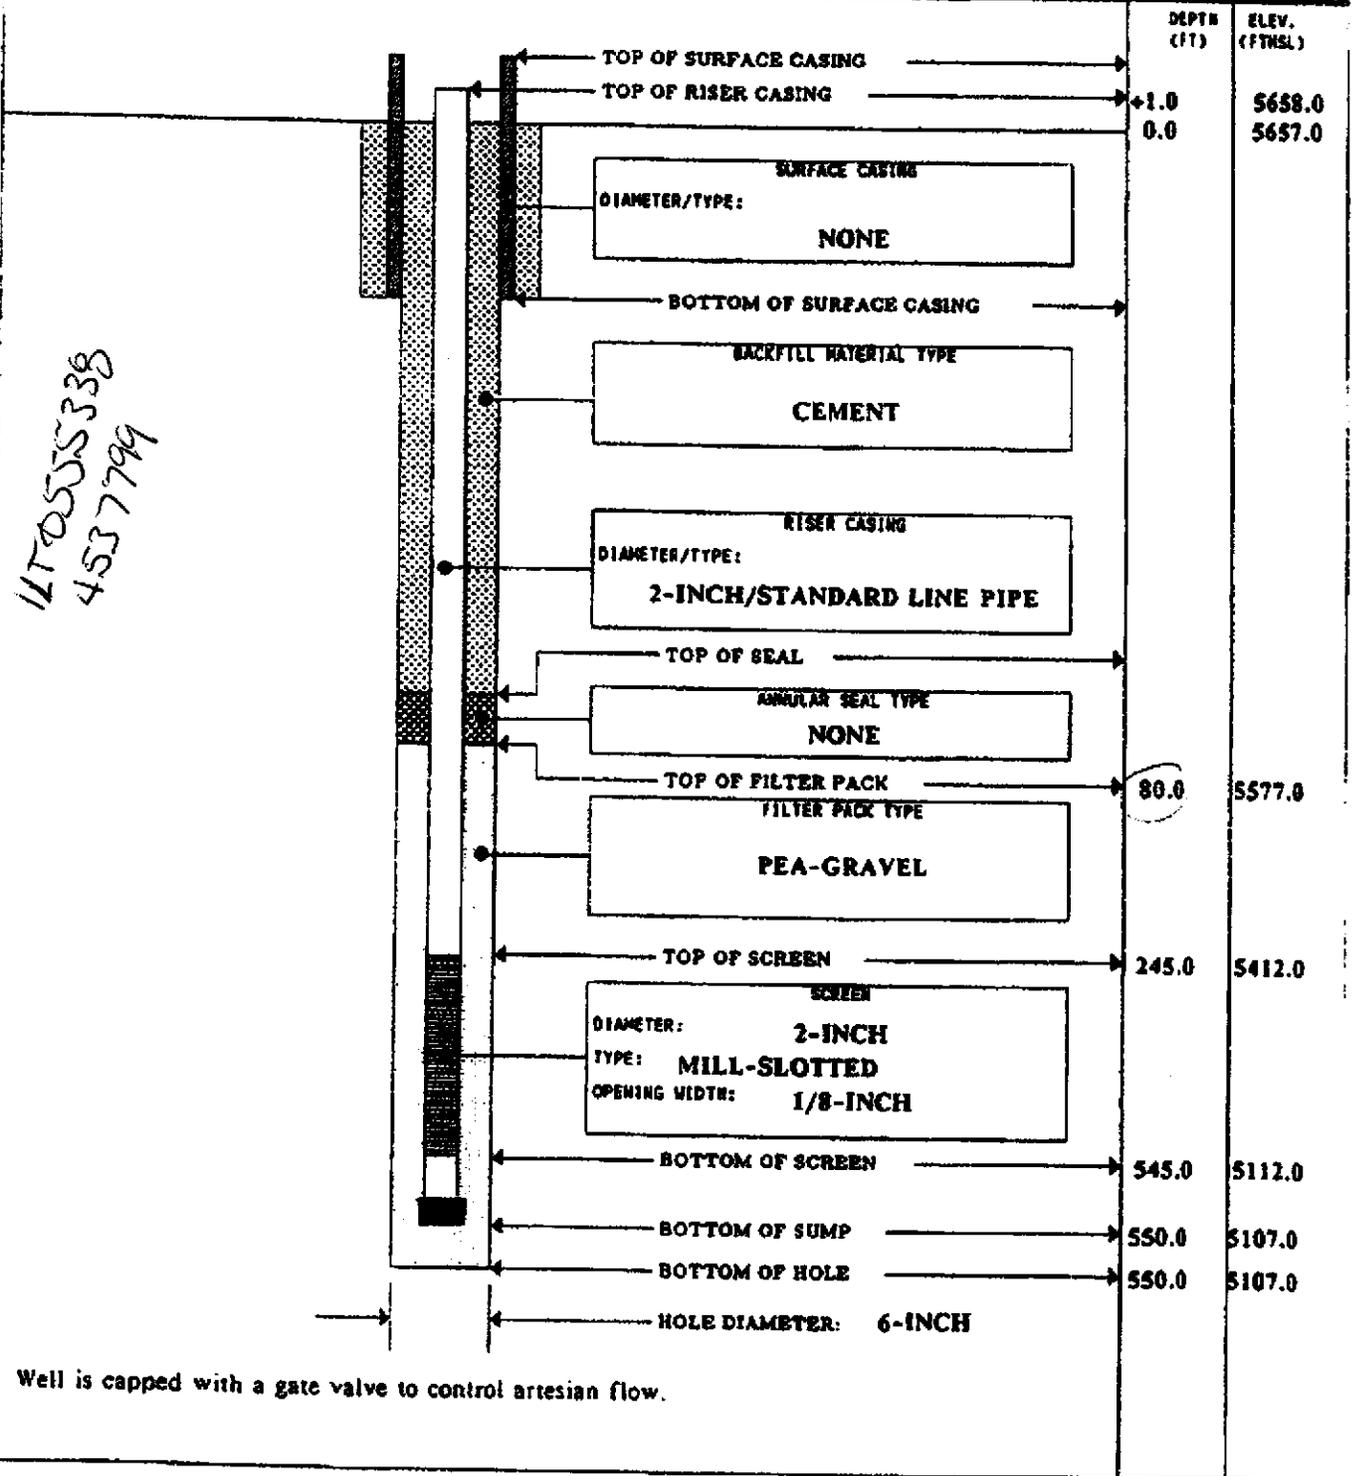

Well is capped with a gate valve to control artesian flow.