

PZ97-8

STATE OF NEVADA
DIVISION OF WATER RESOURCES
WELL DRILLER'S PLUGGING REPORT

OFFICE USE ONLY
Log No. 11549
Permit No. 68741
Basin 601

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

Please complete this form in its entirety in
accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 68741

1 OWNER BARRICK GOLDSTRIKE
MAILING ADDRESS PO BOX 29
ELKO, NV 89803

ADDRESS AT WELL LOCATION BARRICK GOLDSTRIKE MINESITE
Subdivision Name: County: EUREKA

2 LOCATION NE 1/4 NE 1/4 Sec 30 T 36N N/S R 50 E
PERMIT/WAIVER No. MO441A N/A
Issued by Water Resources Parcel No.

Latitude UTM E 11T0554124 NAD 27
Longitude N 4535900 NAD 83/WGS 84

3 TYPE OF WELL
 Domestic
 Municipal/Industrial
 Irrigation
 Monitor
 Test
 Stock

Is this well being plugged because a replacement well was drilled? NO
If yes, what is replacement well NOI?
Is there an existing well log? YES
If yes, what is NDWR well log #? 69501

4 EXISTING WELL CONSTRUCTION
Depth Drilled 540 Feet Depth Cased 500 Feet

7 WELL PLUGGING PROCEDURE
Was well cleaned out to total depth? yes no

EXISTING CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
8 3/4	22.36	.250	+3	40
1.660	2.27	.140	+2	500

If well was not cleaned out to total depth, please explain why:
Was the well contaminated? yes no
Was the casing pulled? yes no
Was the casing over drilled? yes no
100' seal

Existing Perforations:

Type of perforation	Size of perforation	From	feet to	feet
SLOTTED	0.125	480	500	

If casing was left in place, please show where additional perforations were made:
Additional Perforations:
Type of perforator used:
From _____ feet to _____ feet Number of perfs per linear foot _____
From _____ feet to _____ feet Number of perfs per linear foot _____
From _____ feet to _____ feet Number of perfs per linear foot _____
From _____ feet to _____ feet Number of perfs per linear foot _____
From _____ feet to _____ feet Number of perfs per linear foot _____

5 WATER LEVEL
Static water level _____ feet below land surface
Artesian flow _____ G.P.M. P.S.I.
Water temperature _____ °F Quality _____

8 WELL PLUGGING MATERIALS

6 Additional Notes or Comments
DRY HOLE
RAN 3/4" TRIMMY PIPE TO 500'
AND THEN PUMPED ABANDONMENT WHILE TRIPPING UP
MIXED 200 GALLONS OF WATER TO 7 BAGS (50LBS EA)
OF SUPER PLUG & 7 BAGS (100LBS EA) OF BARITE
RAN 20' OF 3/4" TRIMMY PIPE AND PUMPED
NEAT CEMENT TO SURFACE
WEIGHT: 10.3LBS PER GAL
plugs well log 69501

From	feet to	feet	Material Used	<input checked="" type="checkbox"/> Pumped	<input type="checkbox"/> Poured
From 500	feet to 20	feet	BENTONITE/BARITE	<input checked="" type="checkbox"/>	<input type="checkbox"/>
From 20	feet to 0	feet	NEAT CEMENT	<input checked="" type="checkbox"/>	<input type="checkbox"/>
From _____	feet to _____	feet		<input type="checkbox"/>	<input type="checkbox"/>
From _____	feet to _____	feet		<input type="checkbox"/>	<input type="checkbox"/>
From _____	feet to _____	feet		<input type="checkbox"/>	<input type="checkbox"/>
From _____	feet to _____	feet		<input type="checkbox"/>	<input type="checkbox"/>

Neat Cement Fluid Weight _____ lbs/gal
Bentonite Grout _____ % bentonite
Date Started 12/13/2011
Date Completed 12/17/2011

9 DRILLER'S CERTIFICATION
This well was plugged and abandoned under my supervision and the report is true to the best of my knowledge.
Name ROBERT OESCHGER Contractor
Address 5905 SKY TERRACE CT Contractor
RENO, NV 89511
Nevada contractor's license number issued by the State Contractor's Board 0048915A
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 1670
Signed _____
Date 12-17-2011

(Rev. 05-06)

USE ADDITIONAL SHEETS IF NECESSARY

40.974377°N NAD27
116.356713°W

STATE ENGINEER
APR 19 2012
FACSIMILE RCVD

1st

10/08/97

WELL COMPLETION DIAGRAM

G. DAVIS
8-OCTOBER-97

PZ 97-8
Multi point Transducer


LANG	LK-1
HOLE SIZE	7 7/8"
START DRILLING	25-Sep-97
FINISH DRILLING	27-Sep-97
HOLE COMPLETE	29-Sep-97

CASING

DEPTH DRAWING ELEV.

NOT TO SCALE

SURFACE CASING
8" x 1/2" x 40'

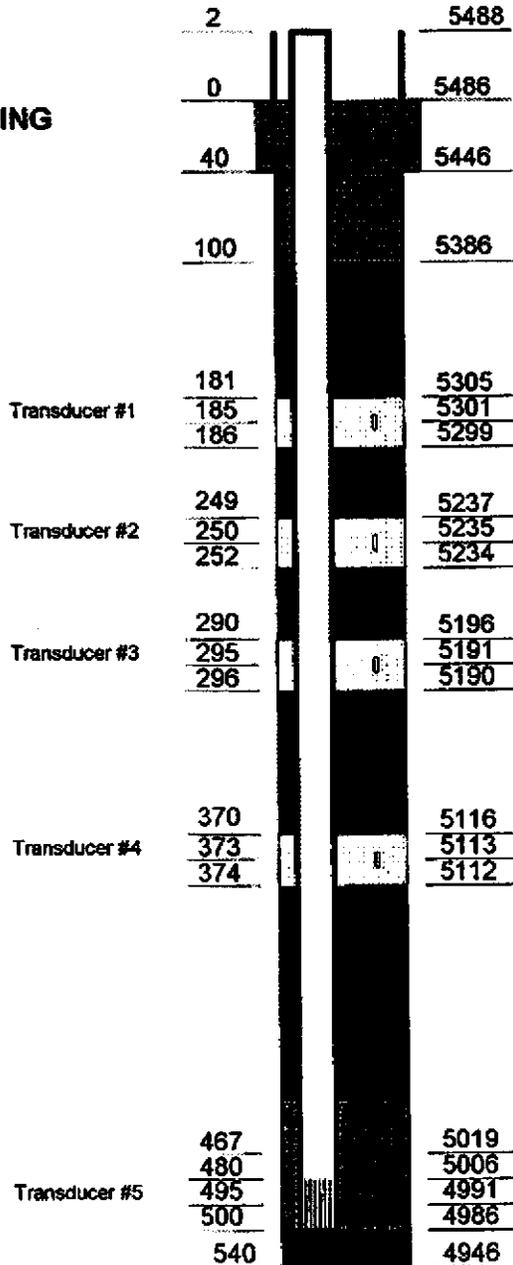

NE of NE	
Sec. 30	T36N, R50E
EUREKA COUNTY	

Waiver # M/O 441A

	CEMENT
	BENTONITE
	#12 SAND
	3/8" GRAVEL

MONITOR PIPE

1 1/4" Flush Joint

GRAVEL

Silica Resources Inc.
#12 SAND
3/8" GRAVEL

WATER TEMPERATURE

75 deg. F

STATIC WATER LEVEL

394.3 ft.

COORDINATES

9701.677 NORTH
15180.424 EAST

STATE ENGINEER

APR 19 2012

FACSIMILE RCVD

