

PRINT OR TYPE ONLY  
 DO NOT WRITE ON BACK

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 14581

1. OWNER LTR Stagelines ADDRESS AT WELL LOCATION \_\_\_\_\_  
 MAILING ADDRESS c/o Allison, McKenzie & Hartman 1155 Glendale  
P.O. Box 646, Carson City, NV 89703 Sparks, NV  
 2. LOCATION SW 1/4 NE 1/4 Sec. 8 T. 19 N. R. 20 E. Washoe County  
 PERMIT NO. M10-264 Issued by Water Resources Parcel No. \_\_\_\_\_ Subdivision Name \_\_\_\_\_

3. WORK PERFORMED  
 New Well  Replace  Recondition  
 Deepen  Abandon  Other \_\_\_\_\_  
 4. PROPOSED USE  
 Domestic  Irrigation  Test  
 Municipal/Industrial  Monitor  Stock  
 5. WELL TYPE  
 Cable  Rotary  RVC  
 Air  Other Perforation

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thick-ness
Asphalt		0	0.5	0.5
Brown Silty Clay		0.5	3.5	3
Gray Gravelly Sand		3.5	7.5	4
Brown Gravel		7.5	16.5	9
Boulders (Granite)		16.5	18.5	2
Brown Sandy Silt		18.5	22	3.5
Brown Sandy Gravel		22	24	2
Brown Clayey Silt		24	30	6
Tan Clay w/ sand & Gravel		30	33.5	3.5
Brown Gravel & Cobbles		33.5	60	26.5
Brown Silty Sand w/ Gravels		60	65	5

8. WELL CONSTRUCTION  
 Depth Drilled 65 Feet Depth Cased 65 Feet  
 HOLE DIAMETER (BIT SIZE)  
 From 10 Inches To 0 Feet 65 Feet  
 \_\_\_\_\_ Inches \_\_\_\_\_ Feet \_\_\_\_\_ Feet  
 \_\_\_\_\_ Inches \_\_\_\_\_ Feet \_\_\_\_\_ Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
<u>4</u>	<u>PVC</u>	<u>Sch 40</u>	<u>-0.5</u>	<u>65</u>

Perforations:  
 Type perforation hand sawn  
 Size perforation \_\_\_\_\_  
 From 45 feet to 65 feet  
 From \_\_\_\_\_ feet to \_\_\_\_\_ feet  
 From \_\_\_\_\_ feet to \_\_\_\_\_ feet  
 From \_\_\_\_\_ feet to \_\_\_\_\_ feet  
 Surface Seal:  Yes  No Seal Type:  
 Depth of Seal 39  Neat Cement  
 Placement Method:  Pumped  Cement Grout  
 Poured  Concrete Grout  
 Gravel Packed:  Yes  No  
 From 41 feet to 65 feet

9. WATER LEVEL  
 Static water level 11.0 feet below land surface  
 Artesian flow \_\_\_\_\_ G.P.M. \_\_\_\_\_ P.S.I.  
 Water temperature \_\_\_\_\_ °F Quality \_\_\_\_\_

10. DRILLER'S CERTIFICATION  
 This well was drilled under my supervision and the report is true to the best of my knowledge.  
 Name Layne Western Contractor  
 Address \_\_\_\_\_ Contractor  
From written Report by:  
 Nevada contractor's license number issued by the State Contractor's Board \_\_\_\_\_  
 Nevada driller's license number issued by the Division of Water Resources the on-site driller 1468  
 Signed [Signature]  
 By driller performing actual drilling on site or contractor  
 Date 9/12/91

Date started 6/25/91 1991  
 Date completed 6/25 1991

7. WELL TEST DATA



TEST METHOD:	G.P.M.	Draw Down (Feet Below Static)	Time (Hours)
<input type="checkbox"/> Bailer <input type="checkbox"/> Pump <input type="checkbox"/> Air Lift			

LOG# 35269



Christy Box

locking cap  
Air tight

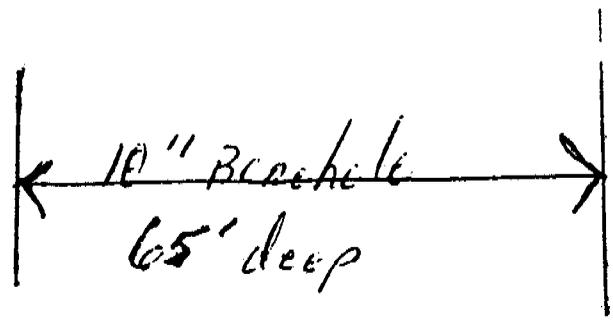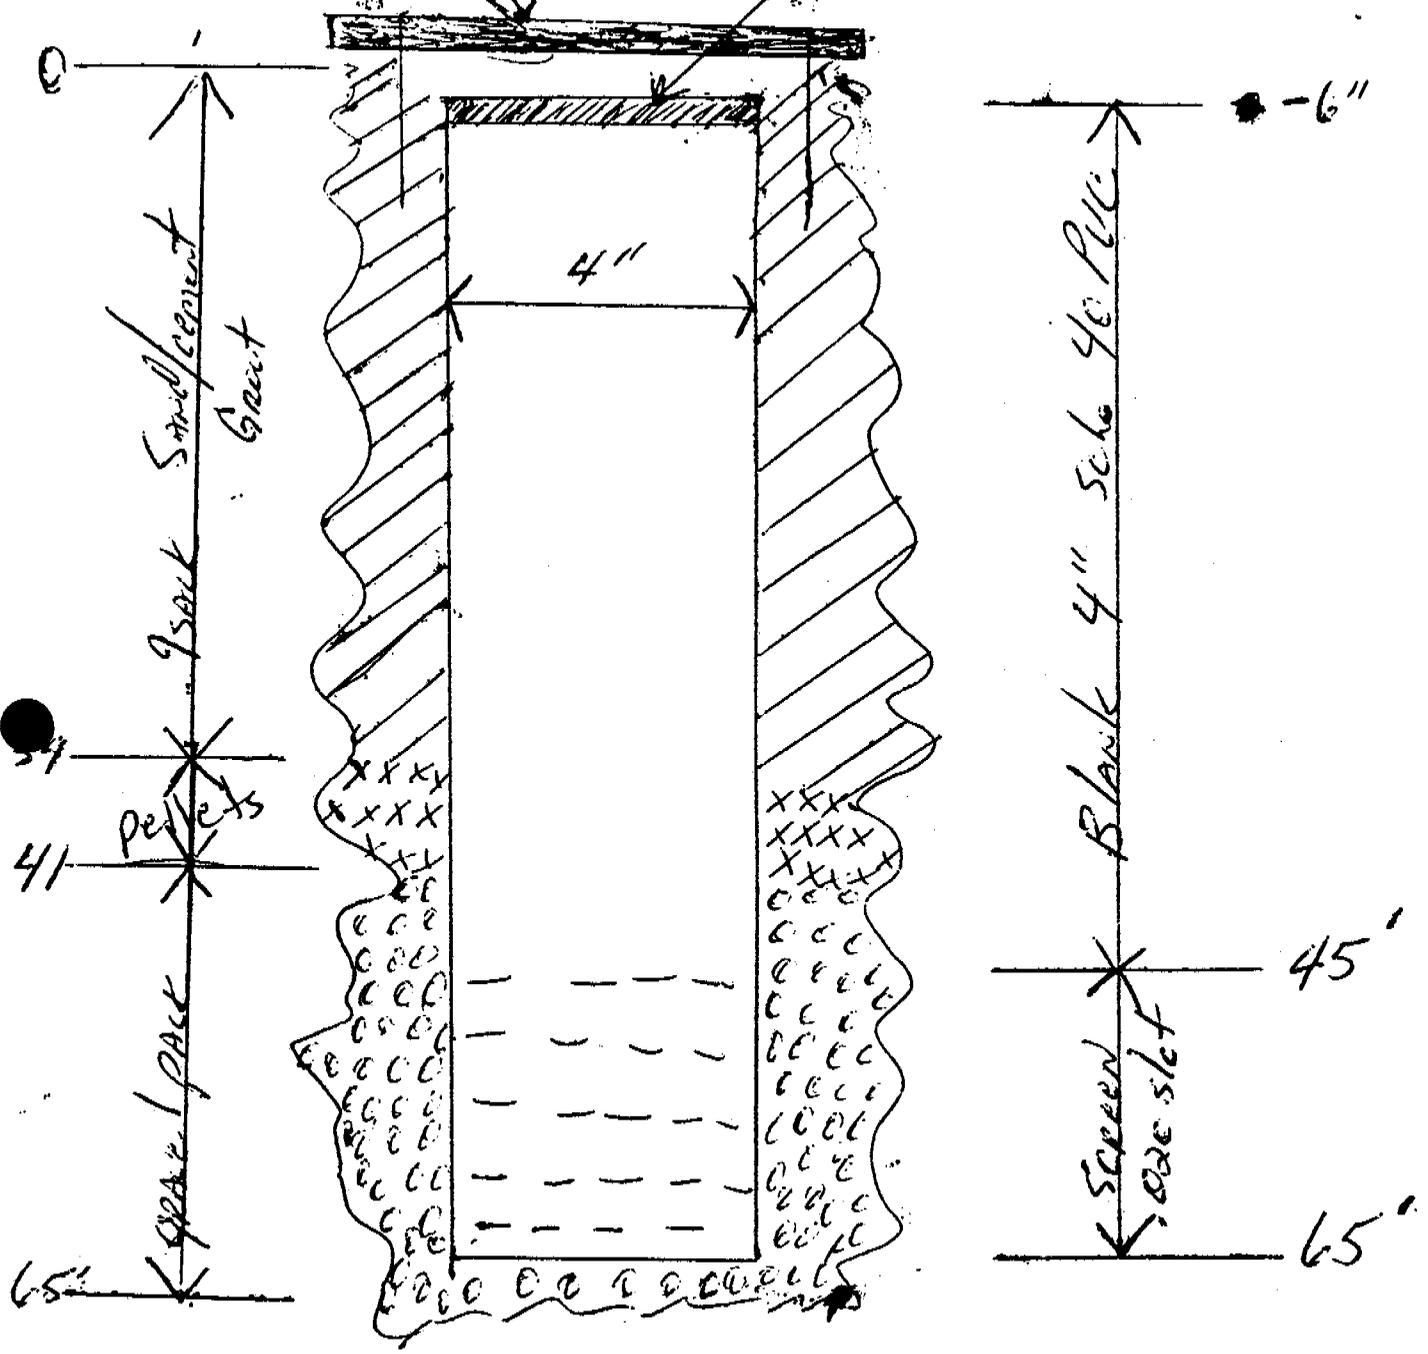



## Hydro-Search, Inc.

5250 So. Virginia Street, Suite 280 • Reno, Nevada 89502  
HYDROLOGISTS - GEOLOGISTS - ENGINEERS  
Phone (702) 829-1200 FAX (702) 829-1243  
WATS (800) 347-4937

August 25, 1989  
(49161-89)

Mr. Peter G. Morros  
State Engineer  
Division of Water Resources  
201 S. Fall Street  
Carson City, Nevada 89710

Attn: Thomas K. Gallagher

Subject: Waiver MO-133  
Abandonment of Two Monitor Wells  
Vacated Minwax Facility  
1695 Industrial Way  
Sparks, Nevada  
SW 1/4, SE 1/4, Sec. 8, T.19N., R.20E.

Dear Mr. Gallagher:

This report is to notify the State Engineer's office that the two monitor wells drilled under the authority of Waiver MO-133 have been abandoned as per state regulations. The wells were located at and near 1695 Industrial Way, Sparks, Nevada in the SW 1/4, SE 1/4, Sec. 8, T.19N., R.20E. as reported in the Hydro-Search, Inc. (HSI) letter to the State Engineer dated June 21, 1989. The wells were originally drilled by Sargent Drilling, Inc. of Reno, Nevada under Notice of Intent No. 10191, and Well Driller's Reports were filed by them dated March 30, 1989.

Abandonment was done by Andresen Exploration Drilling under the supervision of HSI on August 18, 1989, using a hollow stem auger drilling rig. For each well, PVC casing was pulled out of the hole until it broke off (15 feet in MW-1, 5 feet in MW-2). Then a 6 5/8-inch bore hole was re-drilled to total original depth (26.5 feet in MW-1, 30 feet in MW-2). Finally, the holes were filled by pouring the neat cement down the hollow stem of the auger and pulling back the auger 5 feet at a time until the hole was completely filled with neat cement.

Mr. Peter G. Morros  
August 25, 1989  
Page 2

49161\MORROS.LTR

If you have any questions please contact HSI at (702) 829-1200.

Very truly yours,

HYDRO-SEARCH, INC.



Jeffrey S. Edwards  
Hydrogeologist

JSE:mrl

cc: Roger Lytle-Minwax Co., Inc.