One Dollar fi[illegible] fee must accompany affidavit

WELL LOG AND REPORT TO THE STATE ENGINEER OF NEVADA

(Statutes 1939, chapter 178, section 7. See page 2 of this form)

FILED
SEPT. 14, 1943
State Eng. Off.

Log # 51569

PERMIT TO APPROPRIATE WATER, SERIAL NUMBER 10844

Permittee A. C. Delkin Driller Bert Hairgrove

Address 1100 So. 4th Ave., Arcadia, Calif. Address 215 No. 11th, Las Vegas, Nevada

Location of well NW¼ NW¼ Sec. 36 T. 20S R. 61 E. M.D.B. & M.
(Describe in legal subdivisions.)

Water will be used for Manufacturing and Domestic Total depth of well 325 feet

Size of drilled hole 8" Thickness of casing ¼"

Weight of casing per linear foot 19 lbs. Quality of casing used (fair)

Diameter and length of casing 7 /8 I.D. 300 ft.
(Casing 12" in diameter and under give inside diameter; casing over 12" in diameter give outside diameter.)

If flowing well give flow in c.f.s. and pressure 30 G.P.M.

If nonflowing well give depth of standing water from surface

If flowing well describe control works 2" valve
(Type and size of valve, etc.)

Date of commencement of well June 1, 1942 Date of completion of well June 12, 1942

Type of well rig Rebuilt commercial

Screens, seals, plugs, grouts, etc.	Well diagram	Formations. State if dry or water bearing	Kind of casing, liner, shoe, etc.
3 yds. cement	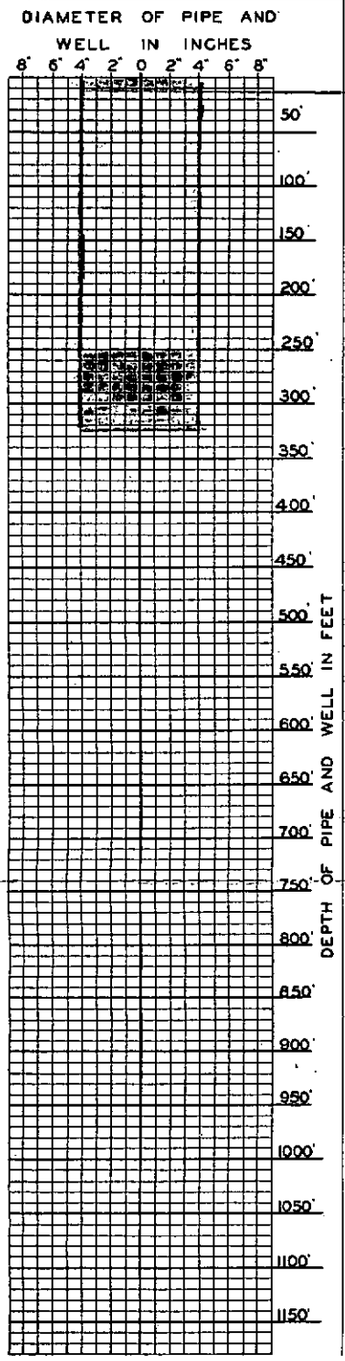	0- 10 soil 10-- 15 gravel (surface water) 15-- 250 yellow clay (Dry) 250- 300 Sandy Clay (Dry) 300- 325 Quick sand (flow)	

This well plugged 6/23/67 [illegible]

Chief aquifer (water-bearing formation)
from 300 to 325 ft.

Other aquifers none

Casing perforated
from ..... to ..... ft.

Size of perforations

60