LOG OF FORMATIONS—*Continued*

From feet	To feet	Thickness	Type of material
179	193	14	Cemented Gravel
193	196	3	Red Clay
196	200	4	Cemented Gravel

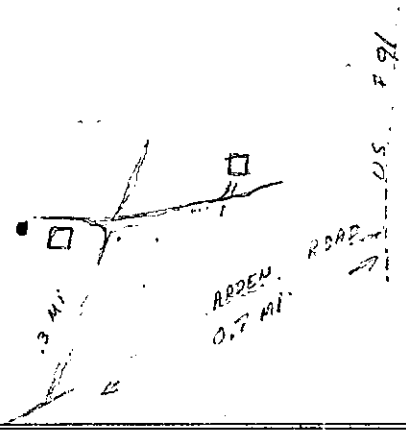

CASING RECORD

Diam. casing	From feet	To feet	Length	"Remarks"—Seals, Grouting, Etc.
8 3/16 I.D.	0	40'	40 Ft.	This Casing isn't Cemented in at all, This procedure was ordered by Mr. Paul Mc Kesson whom Well was Drilled for. I let mud from Bailer flow between Casing an Earth, so as to act as a Seal to hold the Casing, also the Casing was Driven into the Hole.

GENERAL INFORMATION—Pumping Test, Quality of Water, Etc.

Bailed 200 Gallons out of Well in 17 Minutes, Well dropped to ~~145~~ 150 Ft.
Well recovered to Static Level in 17 Minutes (Static Level is ~~[illegible]~~ 134 Ft.)

WELL DRILLER'S STATEMENT

This well was drilled under my jurisdiction and the above information is true to my best information and belief.

Signed Douglas Sleeff
Well Driller

By Self

License No. 137

Dated November 25, 1953

(Not to be filled in by Driller)

1 5 people use water — no lawn
2 F.M. Sub set at approx 140' 1/2 H.P.
3 1 3/4" discharge line
4 generate power with 4900 RPM gasoline motor