




WELL SUMMARY				USCS	Profile
Depth in Feet	Sample Type & Number	Recovery/Drive (inches)	Blows per Foot		
					Driller: Gordon A. Jensen
					Total Depth: 22' Ground Surface El:
					Date Began: 3/27/96 Top of Casing El: 3934.74
					Date Finished: 3/27/96
0					4" asphalt on 4" of base rock, parking area
1	SP/01	18/12	12 20	SC	Brown sandy silt with clay binder, clean fine sand Brown and Moist
3				SW	Clean well graded sand interbedded with fine and coarse lenses, granitic Dry
5	SP/02	18/18	5 16		Water at 6.8' bs
10	SP/03	18/18	5 16	SP	Coarse to medium grain sand, poorly graded Saturated
15	Grab from augers			SP	Heaving sand, pulled augers, installed wooden plug Drill to depth - Saturated
20	Grab from augers			CL	Brown clayey silt
25					Readings taken after Well Development pH: <u>7.12</u> Temperature: <u>57.0</u> Conductivity: <u>3.74</u>

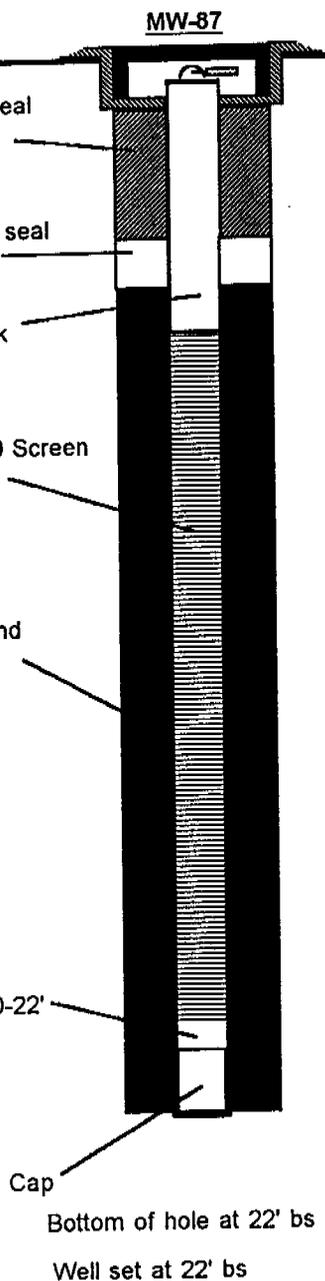

All samples are grabs

Drill Method: Hollow Stem Auger, 8.25" O.D. X 4.25" I.D.  
 Sampling Method: California Modified Sampler/Grab  
 Project No: N62474-95-D-3457  
 Client: Engineering field Activity, West  
 Location: Naval Air Station Fallon, Nevada

bs - Below Grade Surface  
 Denotes Water Table