


WELL SUMMARY				Driller: Gordon A. Jensen	
Depth in Feet	Sample Type & Number	Recovery/Drive (inches)	Blows per Foot	USCS	Profile
0					Well graded area
0-1	SP/01	18/12	12 84		Dark brown sandy silt with some binders Damp
1-2				SM	
2-3					
3-4					
4-5					Brown silty sand, appearance of fill, broken up Moist
5-6	SP/02	18/12	6 29		Water at 6.0' bs
6-10				SM ML	Sandy silt turning to a brown to yellow silty clay organics present, mottled in color Saturated
10-15	SP/03	18/12	12 39		Interbedded silts and sands, fine in grain
15-20	SP/04	18/12	6 38		Clayey silt, brown to tan in color Moist
20-25	SP/05	18/12			Silty clay, dark brown to tan in color, Interbedded with fine sands - Moist
25					

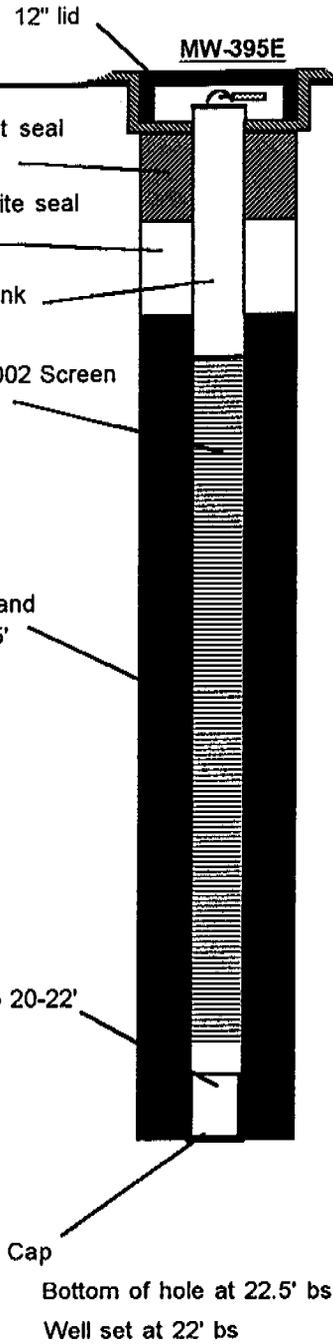

Readings taken after Well Development
 pH: 7.12
 Temperature: 64.6
 Conductivity: Conductivity is higher than range on meter

Drill Method: Hollow Stem Auger, 8.25" O.D. X 4.25" I.D.
 Sampling Method: California Modified Sampler/Grab
 Project No: N62474-95-D-3457
 Client: Engineering field Activity, West
 Location: Naval Air Station Fallon, Nevada

bs- Below Grade Surface
 Denotes Water Table