


WELL SUMMARY				Driller: Gordon A. Jensen	
Depth in Feet	Sample Type & Number	Recovery/Drive (Inches)	Blows per Foot	USCS	Profile
0					Asphalt with 4" base rock
0-1	SP/01	18/12	5		Silty sand, brown in color, fine with light moisture content
1-2			17	SM	
2-3					Must be drilling down old boring Interbedded with silts and sands, very moist and brown in color Water at 6.5' bs
3-4				SM	
4-5	SP/02	18/18	6		Same as above
5-6			18	SM	
6-10	SP/03	18/18	8		Same as above
10-15			23	SM	
15-20	Grab sample from bag				Same as above
20-22				SM	
22-25	Grab sample from bag				Drill out to 22.0' bs, down old boring
25-28				SM	
28-30					<u>Readings taken after Well Devolpement</u> pH: <u>7.00</u> Temperature: <u>60.4</u> Conductivity: <u>Conductivity is higher than range on meter</u>
30-32					

MW-395F

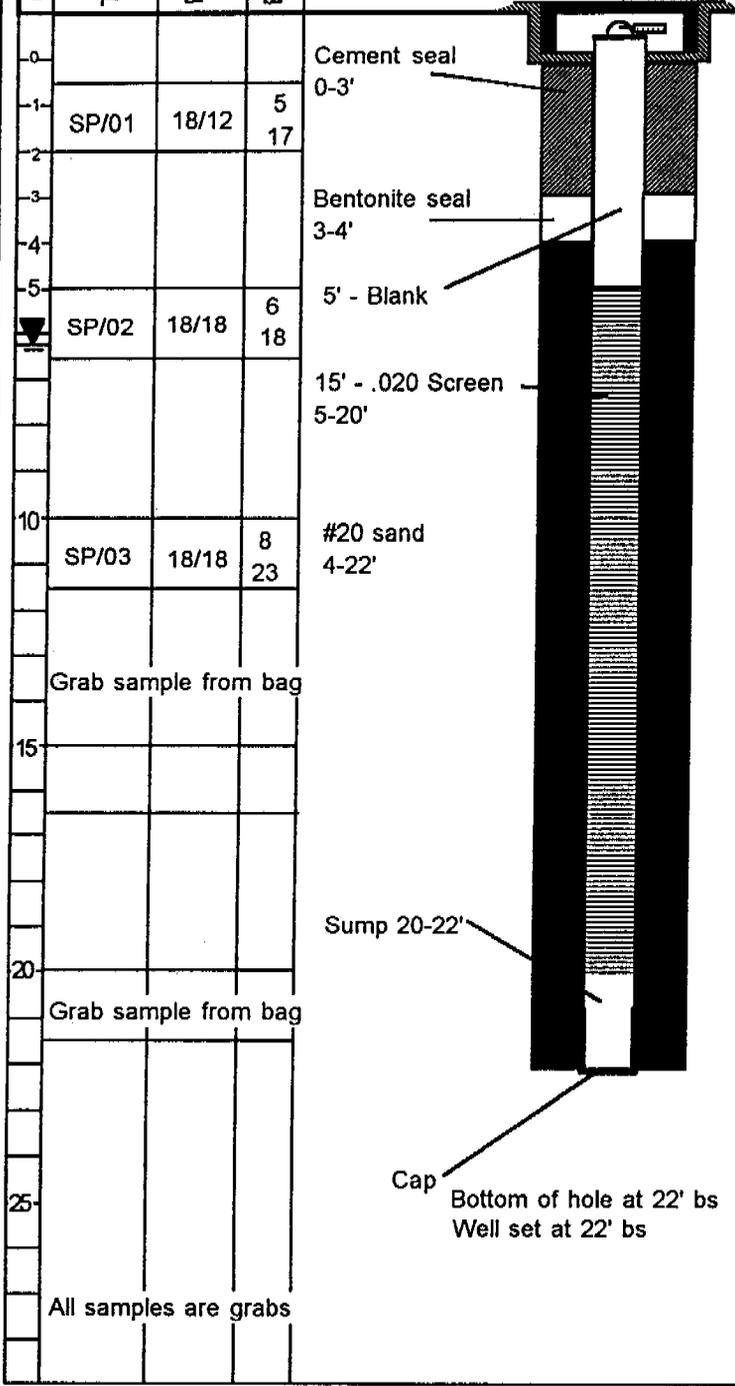

Drill Method: Hollow Stem Auger, 8.25" O.D. X 4.25" I.D.
 Sampling Method: California Modified Sampler/Grab
 Project No: N62474-95-D-3457
 Client: Engineering field Activity, West
 Location: Naval Air Station Fallon, Nevada

bs- Below Grade Surface
 Denotes Water Table