




WELL SUMMARY				Driller: Gordon A. Jensen	
				Total Depth: 22' Ground Surface El:	
				Date Began: 3/13/96 Top of Casing El: 3925.16	
				Date Finished: 3/13/96	
Depth in Feet	Sample Type & Number	Recovery/dive (Inches)	Blows per Foot	USCS	Profile
0					
0-1	SP/01	18/18	30 59	SM	Scattered debris, silty sand grey to brown
1-2				SM	Light brown silty sand
2-3					Dark brown silty sand, fine grained
3-4					
4-5					
5-6	SP/02	18/18	12 41	CL	Light brown silty sand with some grey clay Mottled
6-7					
7-8					Water at 7.2' bs
8-9					
9-10	SP/03	18/18	5 18	SW	Light brown to grey clean sand, granitic Saturated
10-11					
11-12					
12-13					
13-14					
14-15	SP/04	18/18	5 34	SM	Mottled silty sand, very fine
15-16					Density increasing, more cohesiveness
16-17					
17-18					Silt lenses encountered Interbedded with fine, silty binder
18-19					
19-20	SP/05	18/18	8 24	CL	Clayey silt, light brown to tan in color
20-21					
21-22					
22					
25					

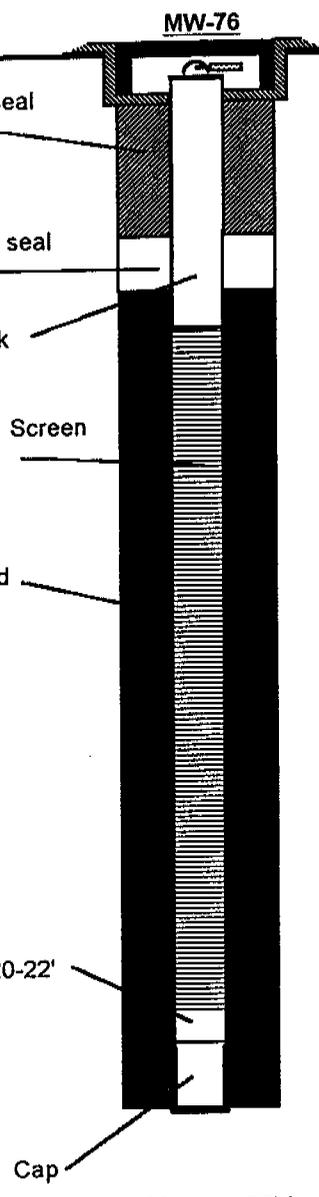

Readings taken after Well Development  
 pH: 7.20  
 Temperature: 62.8  
 Conductivity: Conductivity is higher than range on meter

Drill Method: Hollow Stem Auger, 8.25" O.D. X 4.25" I.D.  
 Sampling Method: California Modified Sampler/Grab  
 Project No: N62474-95-D-3457  
 Client: Engineering Field Activity, West  
 Location: Naval Air Station Fallon, Nevada

bs - Below Grade Surface  
 Denotes Water Table