WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 64647
Permit No.
Basin 052

NOTICE OF INTENT NO. 13593

1. OWNER Newmont Gold
MAILING ADDRESS P.O Box 669 Carlin Nv 89822 | ADDRESS AT WELL LOCATION Cherry Springs 2

2. LOCATION NE ¼ SE ¼ Sec. 21 T. 33 N/S R. 51 E. EUREKA County
PERMIT NO. M/o - 184-D (Issued by Water Resources) | RE: (Parcel No.) | (Subdivision Name)

3. WORK PERFORMED
☐ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Abandon ☒ Other

4. PROPOSED USE
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☒ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☐ Rotary ☐ RVC
☒ Air ☐ Other

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
See Log # 36617				
RE: Waiver M/o 184-D				
Casing Added As Per Letter From M.J. Anderson NV Division of Water Resources. Dated Oct 15, 1991				
4" Casing Added To Bring Well into compliance.				
Well cased to total depth.				

Date started Nov 3, 19 94
Date completed Nov 3, 19 94

7. WELL TEST DATA
TEST METHOD: ☐ Bailer ☐ Pump ☐ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)

NOV 14 '94 STATE OF NEVADA

8. WELL CONSTRUCTION
Depth Drilled 625 Feet Depth Cased 625 Feet

HOLE DIAMETER (BIT SIZE)

	From	To
9½ Inches	0 Feet	420 Feet
6 Inches	420 Feet	625 Feet
Inches	Feet	Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
4.5	10.8 (PVC)	.237	0	625

Perforations:
Type perforation Factory slot
Size perforation 2¼ - 1½
From 425 feet to 625 feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☒ Yes ☐ No
Depth of Seal 100
Placement Method: ☐ Pumped ☐ Poured
Seal Type: ☒ Neat Cement ☐ Cement Grout ☐ Concrete Grout

Gravel Packed: ☐ Yes ☒ No
From feet to feet

9. WATER LEVEL
Static water level Flowing feet below land surface
Artesian flow 600 G.P.M. 18 P.S.I.
Water temperature 68 °F Quality Good

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name O'Keefe Drilling (Contractor)
Address P.O. Box 3810 Butte Mont 59702 (Contractor)

Nevada contractor's license number issued by the State Contractor's Board 27434
Nevada driller's license number issued by the Division of Water Resources, the on-site driller M 1830
Signed [signature] (By driller performing actual drilling on site or contractor)
Date Nov 7, 1994

(Rev. 3-91) USE ADDITIONAL SHEETS IF NECESSARY (O)-627

Log # 64647

DATE STARTED:	JUNE 17, 1991
DATE COMPLETED:	JUNE 26, 1991
DRILLED BY:	ELSING DRILLING & PUMP CO.
DATE DRAWN:	MARCH 25, 1992
DRAWN BY:	S. PAINE
AMENDED DATE:	NOVEMBER 08, 1994
FILEMANE:	CS2.DWG

GOLD QUARRY GRID

GROUND ELEVATION:	5958.01 FT
NORTHING:	-2430 FT
EASTING:	13763 FT

USPLS LOCATION

NE1/4 SE1/4, SEC.21, T33N, R51E

DRILLED UNDER WAIVER

NUMBER M/D-184-D

NEWMONT GOLD COMPANY

HYDROLOGY DEPARTMENT

WELL COMPLETION DIAGRAM
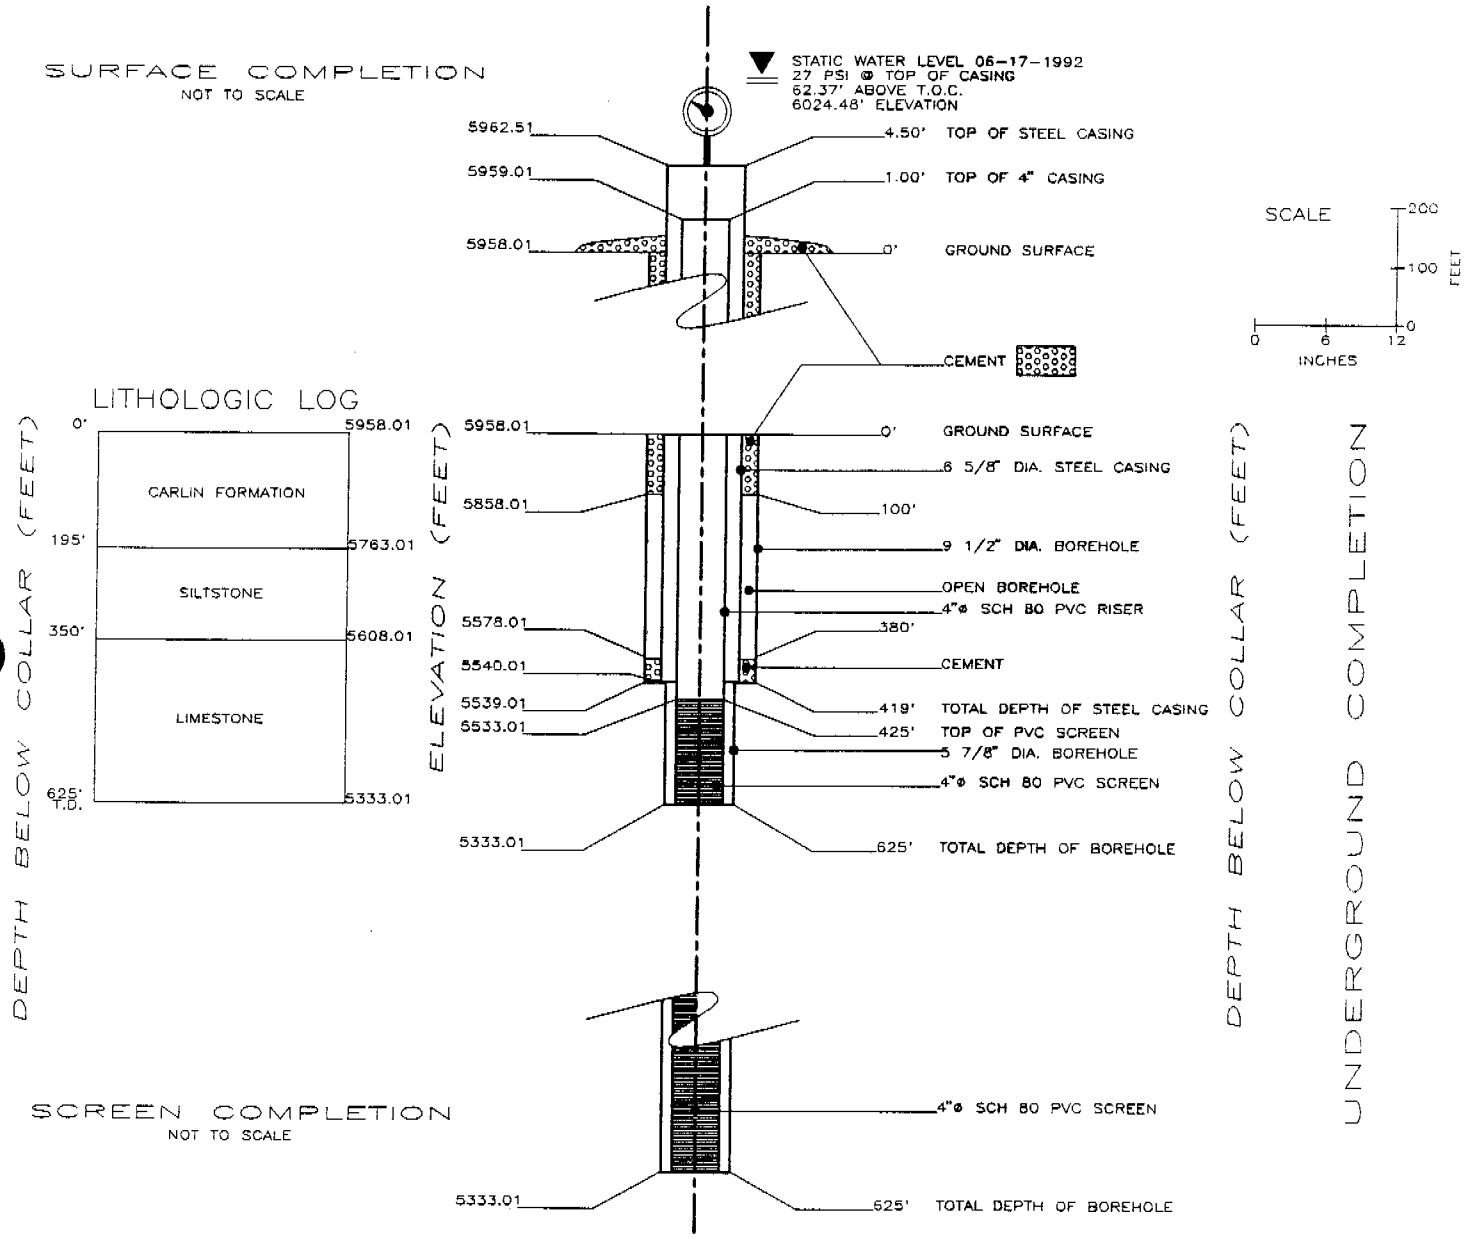
CS-2