WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 73416
Permit No.
Basin 110 C

NOTICE OF INTENT No. 38385

1. OWNER Hawthorne Army Depot
MAILING ADDRESS U.S. Hwy 95
Hawthorne - Nev 89415
ADDRESS AT WELL LOCATION Bldg. 103-6
Army Depot - Hawthorne - Nev

2. LOCATION NE ¼ NW ¼ Sec. 10 T. 8 N/S R. 30 E. Mineral County
PERMIT NO. None (Issued by Water Resources) | 6-300-01 (Parcel No.) | Subdivision Name

3. WORK PERFORMED
☒ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Abandon ☐ Other

4. PROPOSED USE
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☒ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☒ Rotary ☐ RVC
☐ Air ☐ Other

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
Back fill clean soil		0	18	18
Sand black strong petroleum		18	24	6
Sand greenish-gray		24	25	1
Fine to med sand		25	36	11
Black petroleum				
med to coarse sand		36	55	19
Black oil soak				
light olive color		55	61	6
Fine to med sand				
Fine to coarse sand		61	69	8
Olive color				
Fine to med yellow-gray sand		69	72	3
Silty sand yellow gray		72	77	5
Sand fine to		77		
Coarse yellowish-gray			83	6
ATD 103-6-2				

Date started 5-15, 1998
Date completed 5-15, 1998

7. WELL TEST DATA
TEST METHOD: ☐ Bailer ☐ Pump ☐ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)
NO - WATER		

8. WELL CONSTRUCTION
Depth Drilled 83 Feet Depth Cased 82 Feet

HOLE DIAMETER (BIT SIZE)

Inches	From (Feet)	To (Feet)
8¼"	0	83

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
0"	PVC	Sch. 80	0	17

Perforations:
Type perforation Slot
Size perforation .020
From 17 feet to 82 feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☒ Yes ☐ No
Depth of Seal 13
Placement Method: ☒ Pumped ☐ Poured
Seal Type: ☒ Neat Cement ☐ Cement Grout ☐ Concrete Grout

Gravel Packed: ☒ Yes ☐ No
From 15 feet to 83 feet

9. WATER LEVEL
Static water level None feet below land surface
Artesian flow NA G.P.M. NA P.S.I.
Water temperature NA °F Quality NA

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name Ayne Christensen (Contractor)
Address 11201 Etiwanda Ave (Contractor)
Fontana - Ca - 92337
Nevada contractor's license number issued by the State Contractor's Board 001901
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 1468
Signed Steve Johnson (By driller performing actual drilling on site or contractor)
Date 5/22/98

(Rev. 3-91)

USE ADDITIONAL SHEETS IF NECESSARY

(O)-627

AIW -103-6-2

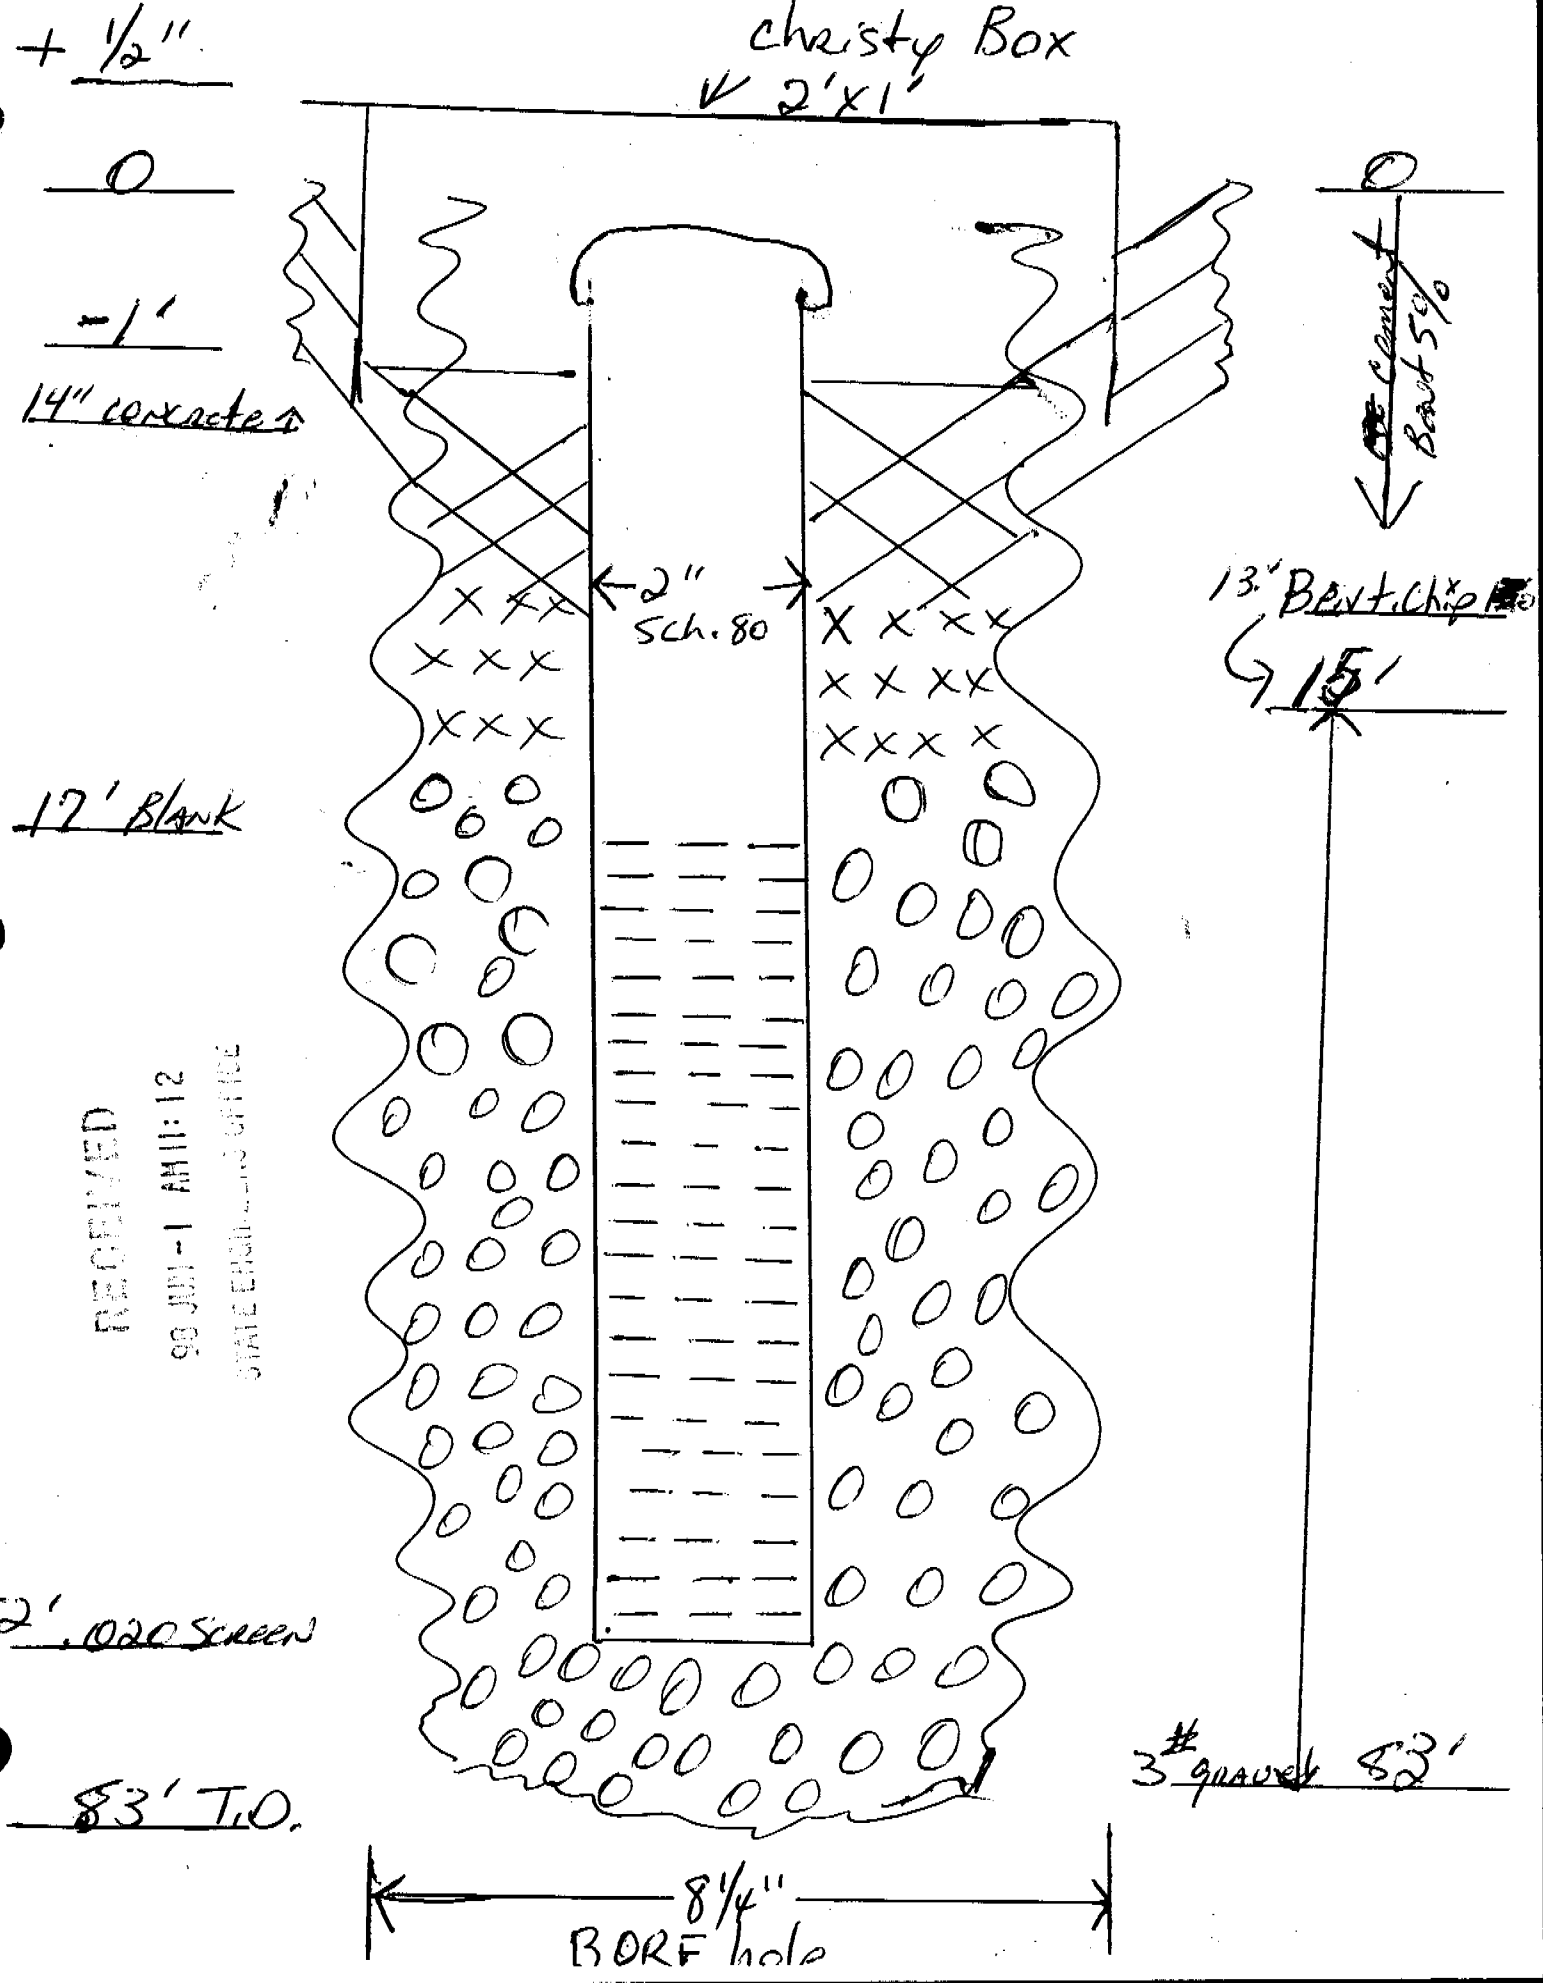

RECEIVED
98 JUN -1 AM 11:12
STATE ENGINEER OFFICE