

Good Triple Completion

PZ99-2

WHILE IN DIVISION OF WATER RESOURCES  
CANARY-CLIENT'S COPY  
PINK-WELL DRILLER'S COPY

STATE OF NEVADA  
DIVISION OF WATER RESOURCES

OFFICE USE ONLY  
Log No. 77515 & 77516  
Permit No. \_\_\_\_\_  
Basin. \_\_\_\_\_

PRINT OR TYPE ONLY  
DO NOT WRITE ON BACK

WELL DRILLER'S REPORT  
Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 39240

1. OWNER BARRICK GOLDSTRIKE MINES ADDRESS AT WELL LOCATION BARRICK GOLDSTRIKE MINESITE, NORTH OF CARLIN, NV.  
MAILING ADDRESS P.O. BOX 29 ELKO, NV 89803  
2. LOCATION SW 1/4 NE 1/4 Sec. 30 T. 36 N/S R. 50 E EUREKA County  
PERMIT NO. N/A Issued by Water Resources Parcel No. N/A Subdivision Name

3. WORK PERFORMED  
 New Well  Replace  Recondition  Deepen  Abandon  Other  
4. PROPOSED USE  
 Domestic  Municipal/Industrial  Irrigation  Monitor  Test  Stock  
5. WELL TYPE  
 Cable  Rotary  RVC  Air  Other

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
BLACK/GRAY ROCK		0	290	290
BLACK/GRAY FRAC.		290	300	10
GRAY ROCK		300	345	45
GRAY ROCK WITH GRAY CLAY		345	385	40
GRAY ROCK		385	400	15
GRAY/WHITE CLAY		400	415	15
GRAY/BLACK ROCK		415	600	185
GRAY/WHITE CLAY		600	665	65
BLACK/GRAY ROCK		665	920	255
GRAY/WHITE CLAY		920	1000	80

CONSTRUCTION DETAIL:

CEMENT	0	50	50
HOLE PLUG	50	220	170
CEMENT	220	250	30
HOLE PLUG	250	328	78
GRAVEL	328	350	22
HOLE PLUG	350	435	85
CEMENT	435	460	25
HOLE PLUG	460	548	88
GRAVEL	548	560	12
HOLE PLUG	560	715	155
CEMENT	715	735	20
HOLE PLUG	735	825	90
GRAVEL	825	841	16
HOLE PLUG	841	885	44
CEMENT	885	905	20
HOLE PLUG	905	970	75
GRAVEL	970	1000	30

8. WELL CONSTRUCTION  
Depth Drilled 1,000 Feet Depth Cased 985 Feet  
HOLE DIAMETER (BIT SIZE)  
From To  
14.75 Inches 0 Feet 30 Feet  
10.040 Inches 30 Feet 280 Feet  
9.875 Inches 280 Feet 1000 Feet  
CASING SCHEDULE  
Size O.D. (Inches) Weight/Ft. (Pounds) Wall Thickness (Inches) From (Feet) To (Feet)  
10.750 34.24 0.250 +1 30  
1:2.375 3.65 0.154 +2 985  
2:1.66 2.27 0.140 +2 835

Perforations:  
Type perforation DRILLED HOLES  
Size perforation 0.187  
From 1: 980 feet to 985 feet  
From 2: 830 feet to 835 feet  
From 3: 555 feet to 560 feet  
From 4: 335 feet to 340 feet  
From: feet to: feet

Surface Seal:  Yes  No Seal Type:  
Depth of Seal 50'  Neat Cement  
Placement Method:  Pumped  Cement Grout  
 Poured  Concrete Grout

CONSTRUCTION DETAILS IN LITH. LOG SECTION  
Gravel Packed:  Yes  No  
From: feet to: feet

9. 1: 464' WATER LEVEL 2: 352' 3: 180'  
Static water level 4: 94' feet below land surface  
Artesian flow N/A G.P.M. P.S.I.  
Water temperature COOL °F Quality FAIR


Date started FEBRUARY 6 19 99  
Date completed MARCH 6 19 99

7. WELL TEST DATA

TEST METHOD:	Bailer	Pump	Air Lift
G.P.M.	Draw Down (Feet Below Static)	Time (Hours)	

10. DRILLER'S CERTIFICATION  
This well was drilled under my supervision and the report is true to the best of my knowledge.  
Name LANG EXPLORATORY DRILLING Contractor  
Address P.O. BOX 5279 Contractor  
ELKO, NV 89802  
Nevada contractor's license number issued by the State Contractor's Board 0021976  
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 1948  
Signed Daryl Stanzman  
By driller performing actual drilling on site or contractor  
Date MARCH 6, 1999



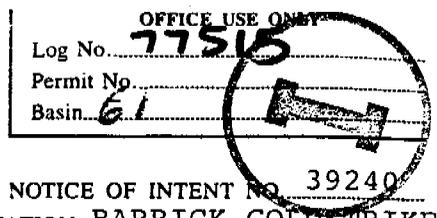

PRINT OR TYPE ONLY  
DO NOT WRITE ON BACK

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT No. 39240

1. OWNER BARRICK GOLDSTRIKE MINES ADDRESS AT WELL LOCATION BARRICK GOLDSTRIKE MINESITE, NORTH OF CARLIN, NV.  
MAILING ADDRESS P.O. BOX 29  
ELKO, NV 89803

2. LOCATION SW 1/4 NE 1/4 Sec. 30 T 36 N 50 E EUREKA County  
PERMIT NO. N/A Issued by Water Resources Parcel No. N/A Subdivision Name

3. WORK PERFORMED  
 New Well  Replace  Recondition  
 Deepen  Abandon  Other

4. PROPOSED USE  
 Domestic  Irrigation  Test  
 Municipal/Industrial  Monitor  Stock

5. WELL TYPE  
 Cable  Rotary  RVC  
 Air  Other

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thick-ness
BLACK/GRAY ROCK		0	290	290
BLACK/GRAY FRAC.		290	300	10
GRAY ROCK		300	345	45
GRAY ROCK WITH GRAY CLAY		345	385	40
GRAY ROCK		385	400	15
GRAY/WHITE CLAY		400	415	15
GRAY/BLACK ROCK		415	600	185
GRAY/WHITE CLAY		600	665	65
BLACK/GRAY ROCK		665	920	255
GRAY/WHITE CLAY		920	1000	80
CONSTRUCTION DETAIL:				
CEMENT		0	50	50
HOLE PLUG		50	220	170
CEMENT		220	250	30
HOLE PLUG		250	328	78
GRAVEL		328	350	22
HOLE PLUG		350	435	85
CEMENT		435	460	25
HOLE PLUG		460	548	88
GRAVEL		548	560	12
HOLE PLUG		560	715	155
CEMENT		715	735	20
HOLE PLUG		735	825	90
GRAVEL		825	841	16
HOLE PLUG		841	885	44
CEMENT		885	905	20
HOLE PLUG		905	970	75
GRAVEL		970	1000	30

8. WELL CONSTRUCTION  
Depth Drilled 1,000 Feet Depth Cased 985 Feet

HOLE DIAMETER (BIT SIZE)

From	To
14.75 Inches	0 Feet 30 Feet
10.040 Inches	30 Feet 280 Feet
9.875 Inches	280 Feet 1000 Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
10.750	34.24	0.250	+1	30
1:2.375	3.65	0.154	+2	985
2:1.66	2.27	0.140	+2	835

Perforations: DRILLED HOLES

Type perforation	Size perforation	From	To
1	980	985	feet
2	830	835	feet
3	555	560	feet
4	335	340	feet

Surface Seal:  Yes  No Seal Type:  
Depth of Seal 50'  Neat Cement  
Placement Method:  Pumped  Cement Grout  
 Poured  Concrete Grout

CONSTRUCTION DETAILS IN LITH. LOG SECTION  
Gravel Packed:  Yes  No

9. 1: 464' WATER LEVEL 2: 352' 3: 180'  
Static water level 4: 94' feet below land surface  
Artesian flow N/A G.P.M. P.S.I.  
Water temperature COOL °F Quality FAIR

Date started FEBRUARY 6 1999  
Date completed MARCH 6 1999

7. WELL TEST DATA

TEST METHOD:	<input type="checkbox"/> Bailer	<input type="checkbox"/> Pump	<input type="checkbox"/> Air Lift
G.P.M.	Draw Down (Feet Below Static)	Time (Hours)	

10. DRILLER'S CERTIFICATION  
This well was drilled under my supervision and the report is true to the best of my knowledge.

Name LANG EXPLORATORY DRILLING Contractor  
Address P.O. BOX 5279 Contractor  
ELKO, NV 89802

Nevada contractor's license number 0021976  
issued by the State Contractor's Board

Nevada driller's license number issued by the 1948  
Division of Water Resources, the on-site driller

Signed Naryl Stanzman  
By driller performing actual drilling on site or contractor

Date MARCH 6, 1999