121

WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety

OFFICE USE ONLY
Log No. 78779
Permit No.
Basin

PRINT OR TYPE ONLY

NOTICE OF INTENT NO. 3[illegible]04

1. OWNER Newmont Gold Co
MAILING ADDRESS P.O. Box 669 Carlin NV

ADDRESS AT WELL LOCATION Rain Mine
13 mi South of Carlin NV
Borehole RWD 1A

2. LOCATION NE ¼ SW ¼ Sec. 34 T. 32 N/S R. 53 E. Elko County

PERMIT NO. | Issued by Water Resources | Parcel No. | Subdivision Name

3. TYPE OF WORK
New Well ☒ Recondition ☐
Deepen ☐ Other ☐

4. PROPOSED USE
Domestic ☐ Irrigation ☐ Test ☒
Municipal ☐ Industrial ☐ Stock ☐

5. TYPE WELL
Cable ☐ Rotary ☒
Other ☐

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
Waste Dump		0'	80'	
mixed siltstone,				
mudstone & limestone				

RECEIVED
99 JAN 22 AM 10:18
STATE ENGINEER'S OFFICE

Date started 11-3, 19 98
Date completed 11-3, 19 98

7. WELL TEST DATA

Pump RPM	G.P.M.	Draw Down	After Hours Pump

BAILER TEST
G.P.M. ..... Draw down ..... feet ..... hours
G.P.M. ..... Draw down ..... feet ..... hours
G.P.M. ..... Draw down ..... feet ..... hours

8. WELL CONSTRUCTION
Diameter 6¼ inches Total depth 80' feet
inches
inches
Casing record Conductor 7" x 20'
Weight per foot 19 lbs Thickness 3/16

Diameter	From	To
2 PVC inches	0' feet	80 feet
inches	feet	feet
inches	feet	feet
inches	feet	feet
inches	feet	feet
inches	feet	feet

Surface seal: Yes ☒ No ☐ Type Neat Cement
Depth of seal 50' feet
Gravel packed: Yes ☒ No ☐ 10/20 Sand
Gravel packed from 60 feet to 80 feet

Perforations:
Type perforation Factory slots
Size perforation 1/16
From 70 feet to 80 feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

9. WATER LEVEL
Static water level Dry hole feet below land surface
Flow G.P.M. P.S.I.
Water temperature °F Quality

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name Rockwell Drilling LLC (Contractor)
Address P.O. Box 6000 Elko NV 89802 (Contractor)
Nevada contractor's license number issued by the State Contractor's Board 46949
Nevada contractor's driller's number issued by the Division of Water Resources
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 1670
Signed [signature] (By driller performing actual drilling on site or contractor)
Date 12-3-98

(Rev. 11-85) USE ADDITIONAL SHEETS IF NECESSARY (O)-627

WELL # RWD-1A

DRILLER Rob Oeschger

DATE OF COMPLETION 11-4-98

GEOLOGIST

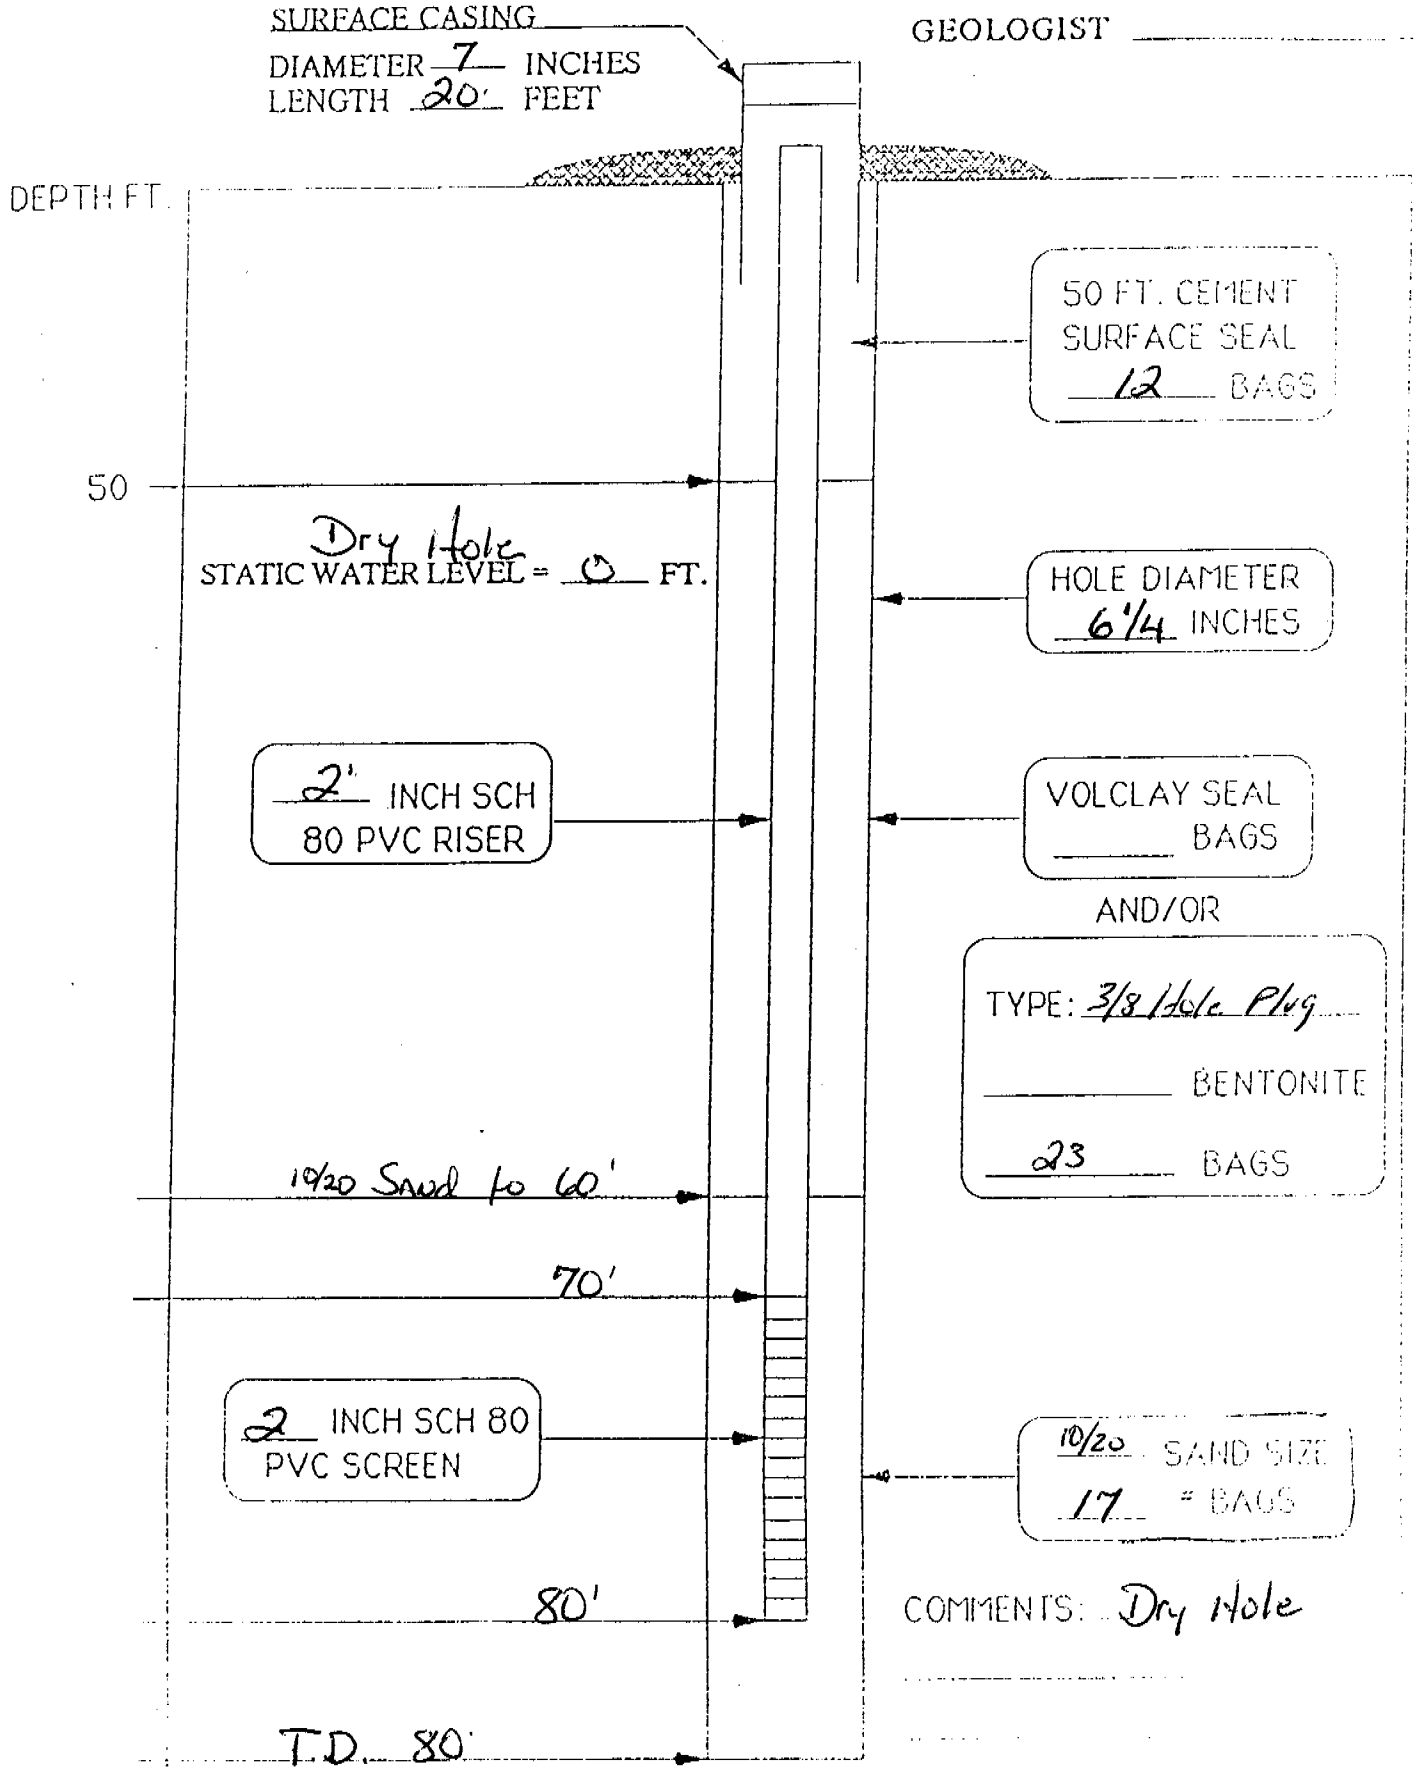

COMMENTS: Dry Hole

DRILL HOLE NO. RWD-1A LOGGED BY W.D DRILL TYPE RC NORTHING _____

PROJECT Rain Waste Dump Piezos DATE 12/7/98 FINAL DEPTH 80' EASTING _____

SHEET 1 OF 1 BEARING 0° INCL. -90° COLLAR ELEV. _____

					ALTERATION						METALLURGY						STRUCTURE				
IVAL	ASSAY	FM/ MEMBER	GRAPHIC LOG	LITHOLOGY	SIL	CLAY	PROP	PHYLLIC	DECALC	DOL	FeOx	SULFIDE	CARBON	CO_3	BARITE (%)	ORE/WASTE TYPE	FAULT	BRECCIA	VEINS	MINERALS	DESCRIPTION
-10		MW ± Mc		mixed dump	1-2	1					2		1	1	2	OC		1/2			Mixed mudstone/siltstone ± minor ss; calcareous clay interstices w/ predominantly ox'd chips; local carbonaceous chips
10-30		" "		" "	2-3									2	5						as above, w/ local chert fragments, more silicified, less clay, strong rxn w/ HCl
30-55		MW/Mc		" "		0-1 30-40													bar cal		as above, w/ increasing proportion of Mc ss and decreasing propor. of chert; local bx2 & barite blebs, some soft, lt. grey, part. ox'd siltstone (m
5-65		MW ± Mc		" "	1-2										10				cal		as above, w/ increasing proportion of ore breccia (bx2), altho weaker silicification; more barite, local calcite veins
5-80		Mc/MW		" "	0-1	1									1						Wkly silicified silty mudstone & sandstone greater proportion of sandy chips (Mc)

TD=80'