WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 78782
Permit No.
Basin 48

NOTICE OF INTENT NO. 39817

1. OWNER Newmont Gold Co
MAILING ADDRESS P.O. Box 669 Carlin NV
ADDRESS AT WELL LOCATION RAW MINE 13 mi South of Carlin NV Bore hole RWD-6

2. LOCATION SW ¼ NW ¼ Sec. 34 T. 32 N/S R. 53 E. County
PERMIT NO. Issued by Water Resources | Parcel No. | Subdivision Name

3. WORK PERFORMED
☒ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Abandon ☐ Other

4. PROPOSED USE
☐ Domestic ☐ Irrigation ☒ Test
☐ Municipal/Industrial ☒ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☒ Rotary ☐ RVC
☐ Air ☐ Other

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
Waste Dump				
SEE ATTACHED				

RECEIVED 99 JAN 22 AM 10:18 STATE ENGINEER'S OFFICE

Date started 11-16, 1998
Date completed 11-18, 1998

7. WELL TEST DATA
TEST METHOD: ☐ Bailer ☐ Pump ☒ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)

8. WELL CONSTRUCTION
Depth Drilled 90' Feet Depth Cased 90 Feet

HOLE DIAMETER (BIT SIZE)

Inches	From Feet	To Feet
8 5/8	0	90

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
7	19 lbs	3/16	0	20
2" Sched 80 PVC			0	90

Perforations:
Type perforation Factory Slots
Size perforation 1/16
From 90 feet to 70 feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☒ Yes ☐ No
Depth of Seal 50
Placement Method: ☒ Pumped ☐ Poured
Seal Type: ☒ Neat Cement ☐ Cement Grout ☐ Concrete Grout

Gravel Packed: ☒ Yes ☐ No
From feet to feet

9. WATER LEVEL
Static water level 40' feet below land surface
Artesian flow 15 G.P.M. P.S.I.
Water temperature Cold °F Quality

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name Rockwell Drilling LLC (Contractor)
Address P.O. Box ~~8800~~ 6000 ELKO NV 89802 (Contractor)

Nevada contractor's license number issued by the State Contractor's Board 46949
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 1670
Signed [signature] (By driller performing actual drilling on site or contractor)
Date 12-1-98

(Rev. 3-91) USE ADDITIONAL SHEETS IF NECESSARY (O)-627

WELL # RWD-6

DRILLER Rob Oeschger

DATE OF COMPLETION 11-18-98

GEOLOGIST

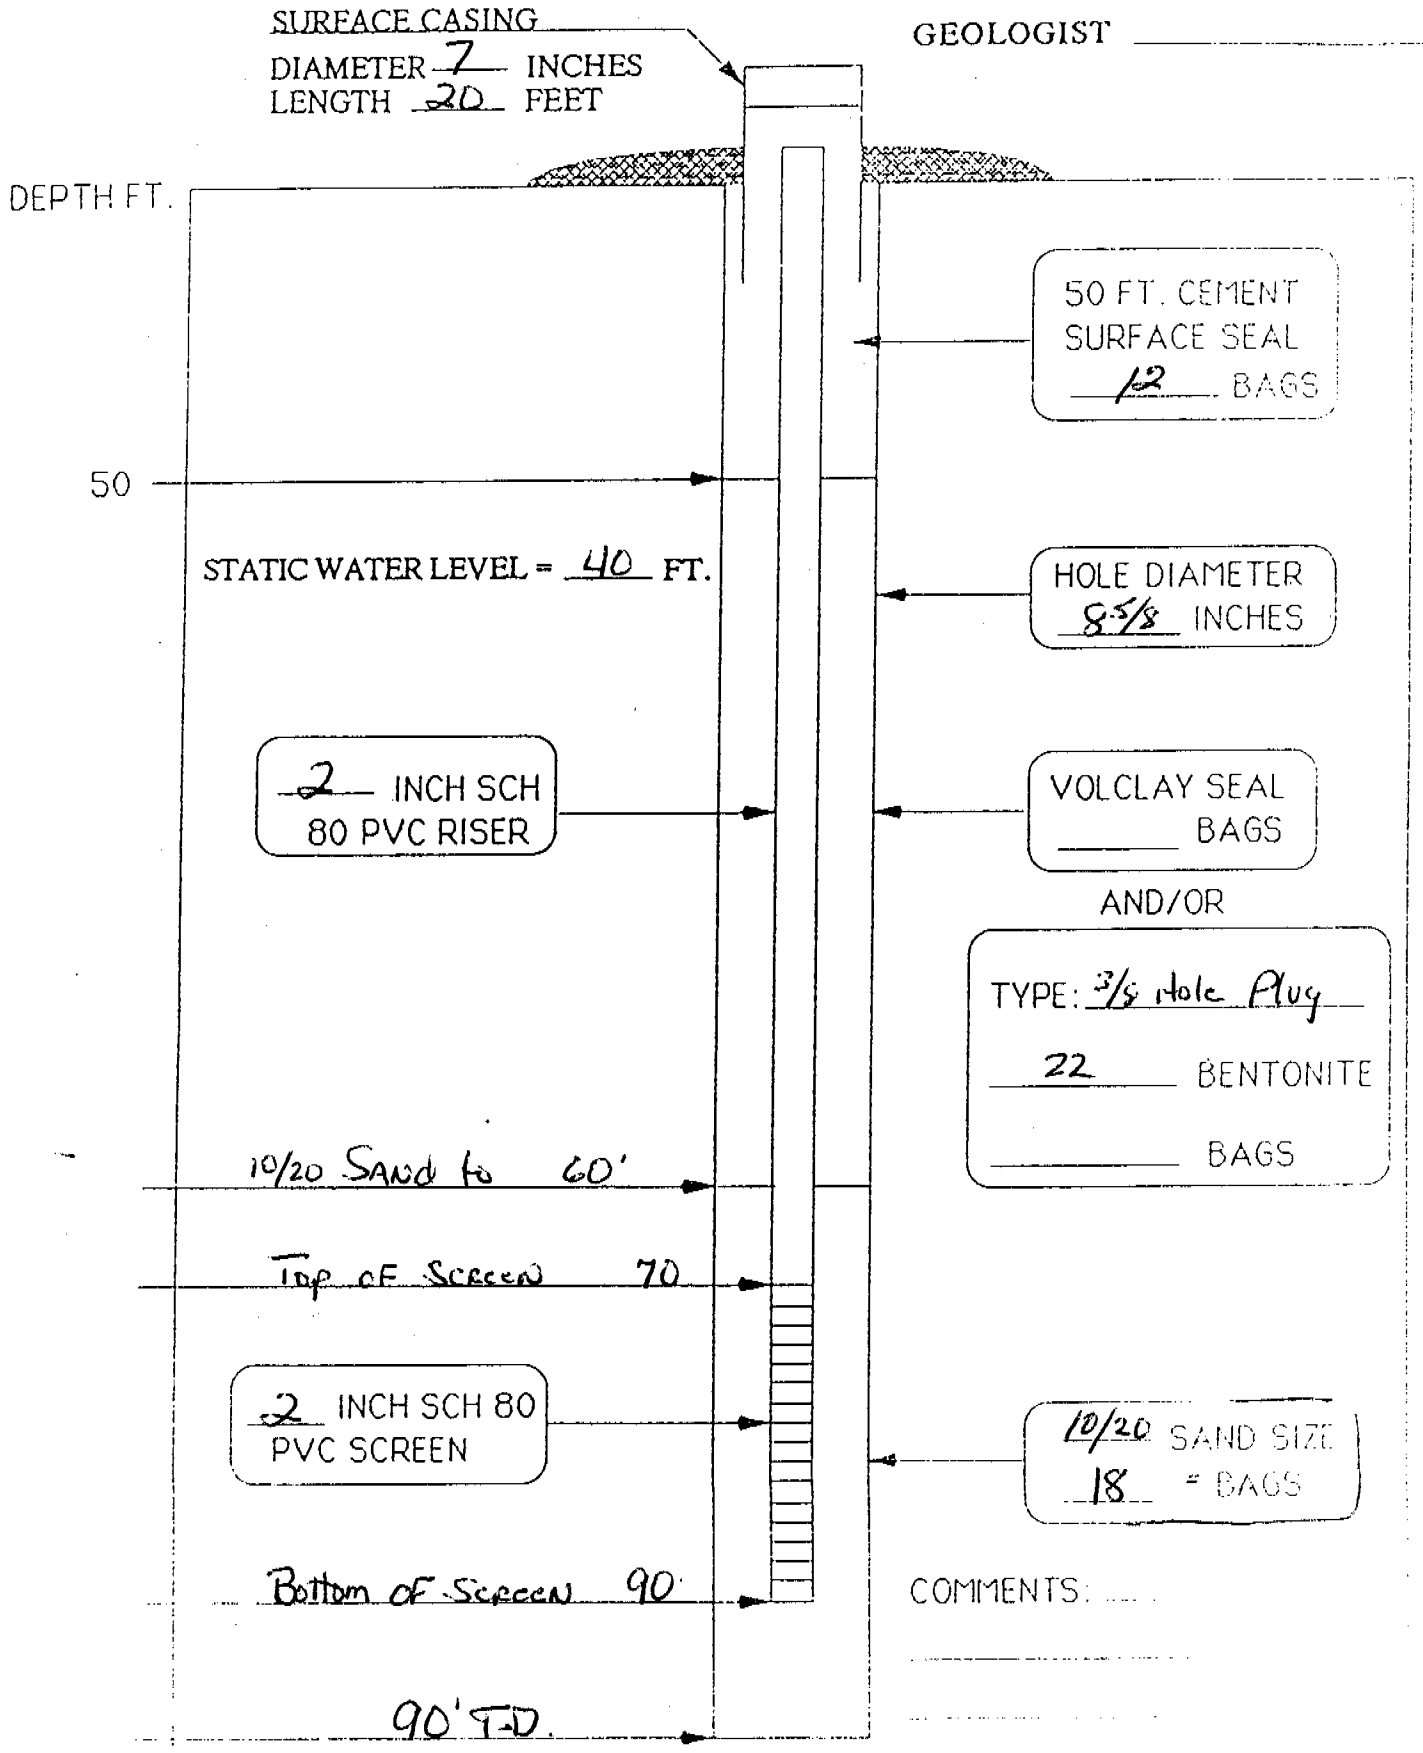

COMMENTS:

DRILL HOLE NO. RWD-6 LOGGED BY W.D. DRILL TYPE RC NORTHING 103406.419
PROJECT Rain Waste Dump Piezos DATE 12/10/98 FINAL DEPTH 80' EASTING 101208.400
SHEET 1 OF 1 BEARING 0° INCL. -90° COLLAR ELEV. 6457.672

INTERVAL	ASSAY	FM/MEMBER	GRAPHIC LOG	LITHOLOGY	SIL	ALTERATION: CLAY	PROP	PHYLLIC	DECALS	DOL	METALLURGY: FeOx	SULFIDE	CARBON	CO_3	BARITE (%)	ORE/WASTE TYPE	STRUCTURE: FAULT	BRECCIA	VEINS	MINERALS	DESCRIPTION
0-15		Mc ± MW		mixed dump		2					2			1	Tr	OS					At toward brown, reddish and yellowish-brown & beige, ox'd med. to coarse grn'd SS (Mc) ± minor local siltstone and mudstone chips, minor local chert, clayey
15-45		Mc ± MW	?	mxdp/GS	?																as above, w/ less clay difficult to distinguish whether this is just Mc bedrock or dump/fill mat'l
45-55		Mc		" "																	Appears too heterogeneous to be bedrock As above, no clay, heterog. mixture of SS, w/ clear, white qtz grains, siltstone, mudstone and chert grains, v. faint HCl rxn
55-60		Mc		" "		2								1							as above, clayey horizon
60-80		Mc MW		" "		1															as above, but w/ distinct MW chips, some silicified; still predominately SS.

TD = 80'

NATURE SAVER™ FAX MEMO 01616

Date 1-7-99	# of pages ▶ 2
To Hard Rock	From Sam
Co./Dept.	Co. NGC
Phone # 738 2926	Phone # 777 4537
Fax # 778 9641	Fax #