WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 78857
Permit No.
Basin 100
I 38604
NOTICE OF INTENT NO.

1. OWNER U.S. Army
MAILING ADDRESS Hawthorne Army Depot US Hwy 95 Hawthorne NV 89415
ADDRESS AT WELL LOCATION Hawthorne Army Depot US Hwy 95 Hawthorne NV 89415

2. LOCATION SW ¼ SE ¼ Sec. 12 T. 5 N/S R. 30 E. Mineral County
PERMIT NO. N/A Issued by Water Resources
Parcel No. Hawthorne Army Depot
Subdivision Name N/A

3. WORK PERFORMED
☒ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Abandon ☐ Other

4. PROPOSED USE
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☒ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☒ Rotary ☐ RVC
☐ Air ☐ Other

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
grey Fine to med sand		0	7	7
Brn/tan silty sand		7	12	5
Brn silt		12	19	7
Fine to med sand some gravel		19	24	5
Brn silt		24	26	2
Fine to coarse sand & some gravel		26	43	17
white volcanic ash		43	44	1
yellow/Brn clay		44	49	5
Brn/tan silty sand		49	72	23
yellow/Brn silty clay		72	82	10
yellow/Brn clay		82	83	1
tan fine to med sand		83	96	13
yellow/Brn clay		96	98	2
white volcanic ash		98	99	1
yellow/Brn clay		99	100	1
MW-4				

Date started JAN. 29 2000
Date completed JAN. 30 2000

7. WELL TEST DATA
TEST METHOD: ☐ Bailer ☐ Pump ☐ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)
JAPOR		
	Well	

8. WELL CONSTRUCTION
Depth Drilled 100 Feet Depth Cased 100 Feet

HOLE DIAMETER (BIT SIZE)

		From	To
8 Inches		0 Feet	100 Feet
Inches		Feet	Feet
Inches		Feet	Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
2	PVC	Sch. 40	0	40

Perforations:
Type perforation slot
Size perforation .010
From 40 feet to 100 feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☒ Yes ☐ No
Depth of Seal 0 - 31
Placement Method: ☒ Pumped ☐ Poured
Seal Type: ☒ Neat Cement ☐ Cement Grout ☐ Concrete Grout

Gravel Packed: ☒ Yes ☐ No
From 36 feet to 100 feet

9. WATER LEVEL
Static water level NONE feet below land surface
Artesian flow NA G.P.M. NA P.S.I.
Water temperature NA °F Quality NA

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name (Contractor) Layne Christensen
Address (Contractor) 11001 Etiwanda Ave Fontana - CA 92337
Nevada contractor's license number issued by the State Contractor's Board 0019101
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 1468
Signed Steve Johnson
By driller performing actual drilling on site or contractor
Date 2-5-00

(Rev. 3-91) USE ADDITIONAL SHEETS IF NECESSARY (O)-627
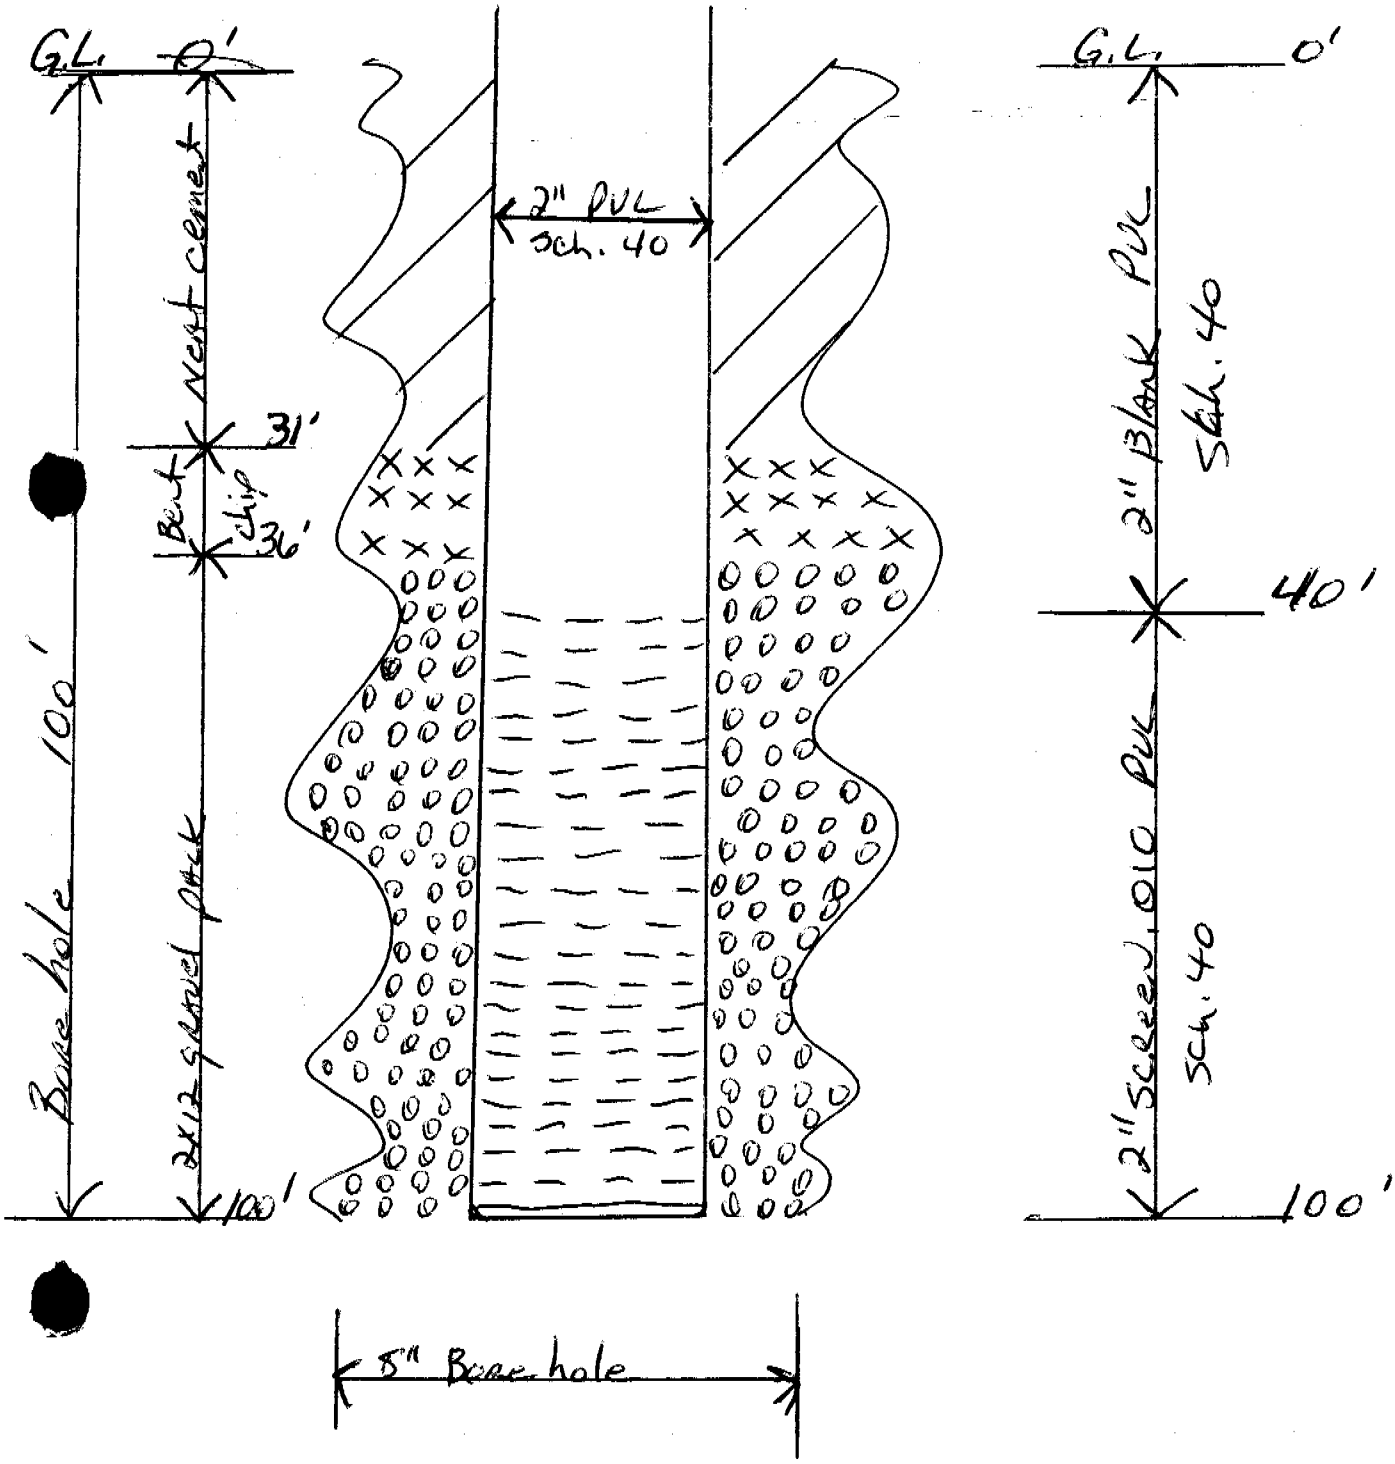
MW - 4 Hawthorne - Newport