WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY
NDEP #4-000061
PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 109726
Permit No.
Basin Ø90 pg 1 of 3

NOTICE OF INTENT NO. 60457

1. OWNER Chevron Environmental Management Co.
MAILING ADDRESS 6001 Bollinger Canyon Rd San Ramon, CA 94583
ADDRESS AT WELL LOCATION 947 Tahoe Blvd. Incline Village, Nv 89451
N: 14767666.94 E: 2238984.56 NAD 83

2. LOCATION NW ¼ ~~NE~~ NE ¼ Sec. 15 T. 16 N/S R. 18 E. Washoe County
PERMIT NO. NDEP #4-000061 Issued by Water Resources | 132-231-10 Parcel No. | Incline Village Subdivision Name

3. WORK PERFORMED
☑ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Abandon ☐ Other

4. PROPOSED USE Air sparge
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☑ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☐ Rotary ☐ RVC
☐ Air ☑ Other Sonic

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
Sandy fill		0	7	7
Sand cobbles < 70%		7	14	7
brn sand w/gravel fine to coarse		14	24	10
brn silty clay w/ sand, moist		24	29	5
brn sand w/silt fine to coarse	32	29	37	8
Gry silty CL		37	40	3
brn clyey silty sand		40	43	3
brn & Gry sand w/ silt med to course wet.		43	47	4
from NOI				
~~N 39.249164 W 119.948.84 WGS84~~				
AS-1				
39.258653°N 119.944456°W NAD 27 (TR)				
~~N 39.249164 W 119.948.84 NAD 27~~				

Date started July, 21, 2007
Date completed July, 21, 2007

7. WELL TEST DATA
TEST METHOD: ☑ Bailer ☑ Pump ☐ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)
1	3.25"	1.5

STATE ENGINEERS OFFICE
2007 OCT -1 AM 10:15
RECEIVED
2008 JUL 10 AM 10:13
RECEIVED

8. WELL CONSTRUCTION
Depth Drilled 47 Feet Depth Cased ~~46.5~~ 46 Feet

HOLE DIAMETER (BIT SIZE)

	From	To
6" Inches	0 Feet	47 Feet
Inches	Feet	Feet
Inches	Feet	Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
2 3/8		Schd 80	0	46

Perforations:
Type perforation Slotted
Size perforation .020
From 45' feet to 46' feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☒ Yes ☐ No
Depth of Seal 12"-42 / 42-44 med chips
Placement Method: ☐ Pumped ☒ Poured
Seal Type: ☐ Neat Cement ☒ Cement Grout ☐ Concrete Grout
Gravel Packed: ☒ Yes ☐ No
From 44' feet to 46 feet

9. WATER LEVEL
Static water level 33' 10" feet below land surface
Artesian flow — G.P.M. — P.S.I.
Water temperature Cold °F Quality

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name Mario Romero / Prosonic Contractor
Address 12464 McCann Dr, Santa Fe Springs CA 90670 Contractor
Nevada contractor's license number issued by the State Contractor's Board 0051765
Nevada driller's license number issued by the Division of Water Resources, the on-site driller M-2313
Signed [signature]
By driller performing actual drilling on site or contractor
Date 8-23-07

(Rev. 12-01) USE ADDITIONAL SHEETS IF NECESSARY (O)-627

Log # 109726 pg 2 of 3

Map of Site:

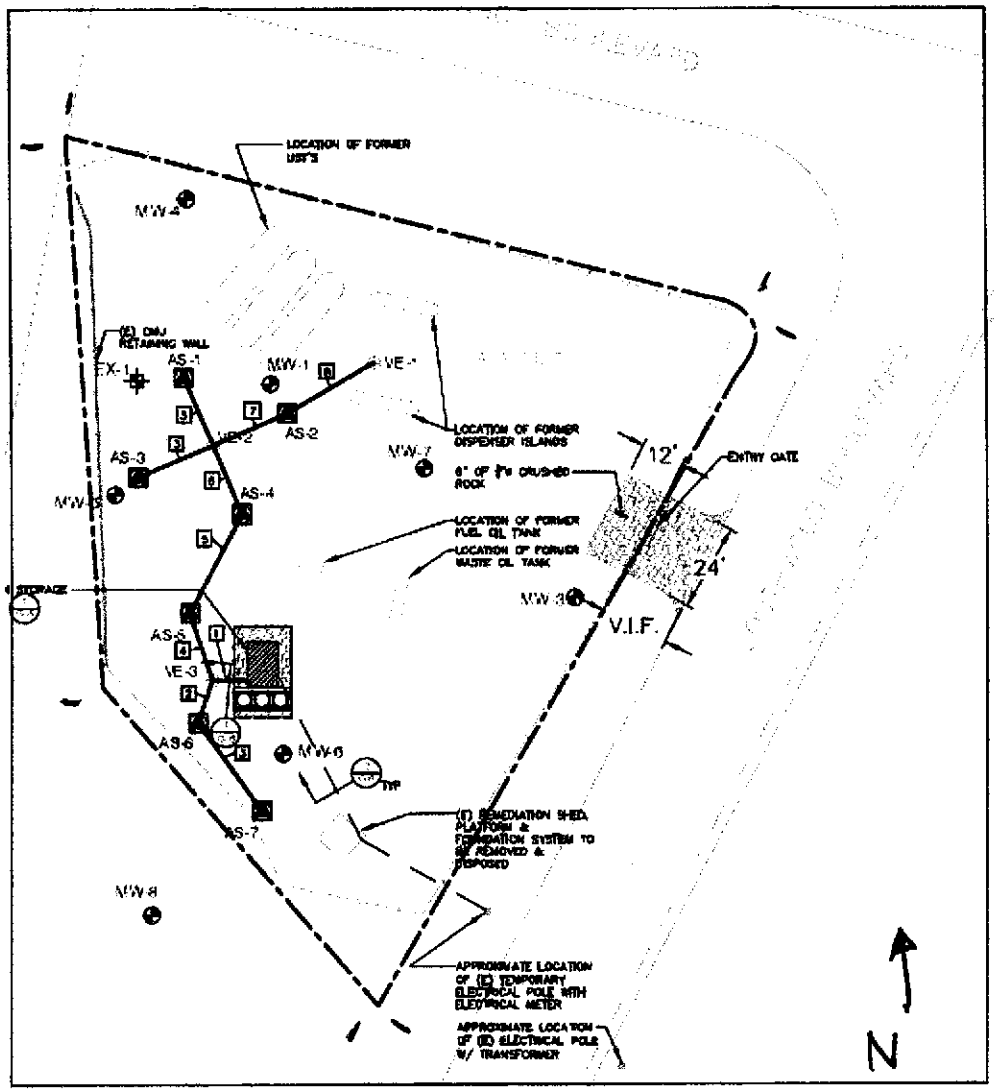

RECEIVED
2008 JUL 10 AM 10: 15
STATE ENGINEERS OFFICE

RECEIVED
2007 OCT -1 AM 10: 13
STATE ENGINEERS OFFICE

Log# 109726 pg 3of3

SECOR

JOB NAME _____
JOB NO. _____
CALCULATED BY _____ DATE _____
CHECKED BY _____ DATE _____
SHEET _____ OF _____

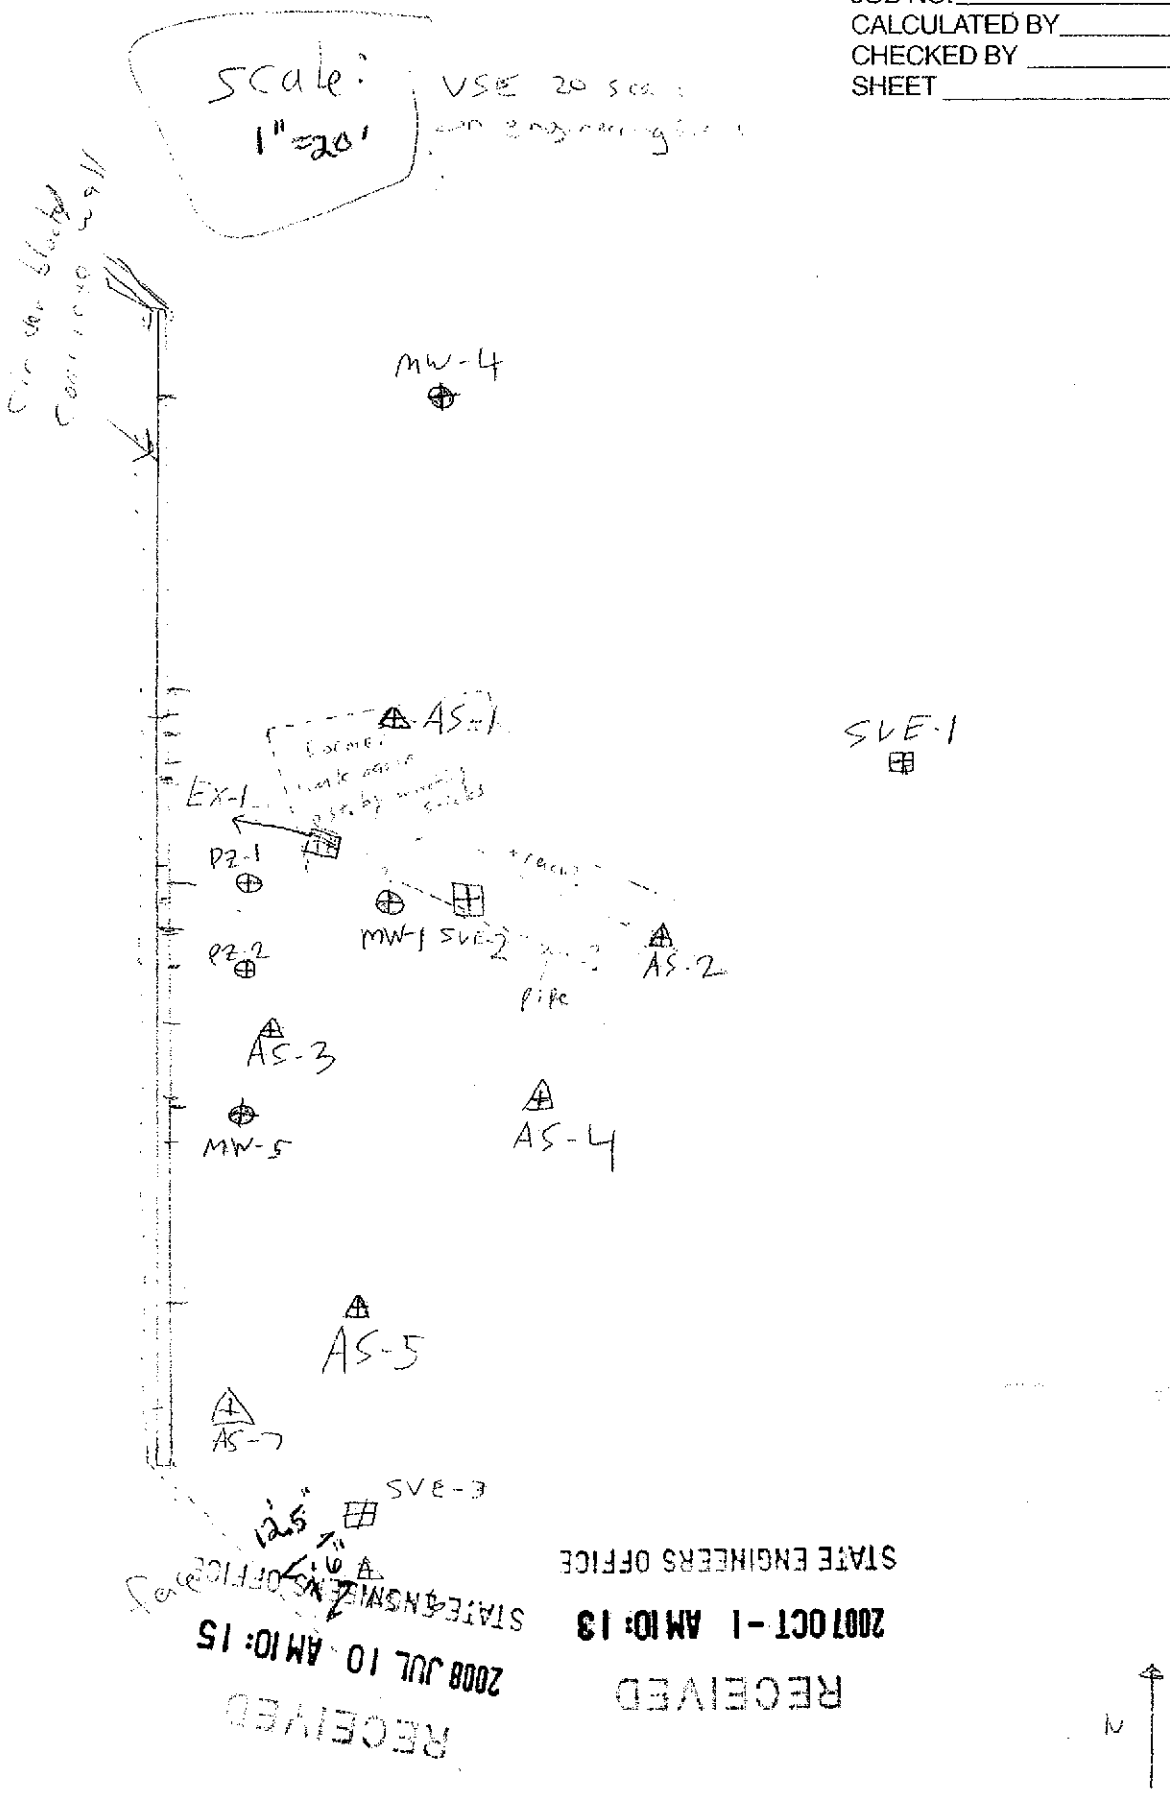

RECEIVED
2008 JUL 10 AM 10: 15
STATE ENGINEERS OFFICE
RECEIVED
2007 OCT -1 AM 10: 13
STATE ENGINEERS OFFICE