

STATE OF NEVADA
DIVISION OF WATER RESOURCES
WELL DRILLER'S REPORT

OFFICE USE ONLY
Log No. 115935
Permit No. _____
Basin No. 070

PRINT OR TYPE IN BLACK INK ONLY
DO NOT WRITE ON BACK

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 09199 ✓
WELL NAME (if applicable): W-26

1. OWNER/CLIENT NAME North Nevada Asset Holdings
MAILING ADDRESS P.O. Box 3500
Winnemucca, NV 89446

DETAILED ADDRESS AT WELL LOCATION 1480 W. Winnemucca Blvd
Winnemucca, NV 89403
Subdivision Name: _____ County: Humboldt

2. PLS LOCATION N 40° E 300' 30" Sec 36 T2S R3E
PERMIT/WAIVER NO. NEEP 5-000114 | 015-282-09
Issued by Water Resources Current Parcel No.

Latitude _____ UTM E 1434810.52 NAD 27
Longitude _____ UTM N 14978923.5V NAD 83/WGS 84

3. WORKED PERFORMED
 New Well Deepen: Orig WL# _____
 Replacement: Original well log # _____
 Recondition: Original well log # _____

4. PROPOSED USE
 Domestic Irrigation Monitor
 Mining / Dewater Com / Ind Stock
 Test / Other Mun / QM Rec

5. WELL TYPE
 Auger Rotary RVC
 Air Mud Sonic
 Other

6. LITHOLOGIC LOG

Material Encountered	Lost Circ.	Water Strata	From	To	Thick-ness
SEE ATTACHED SHEET					

9. WELL CONSTRUCTION

Depth Drilled: 25 Feet Depth Cased: 25 Feet

HOLE DIAMETER (BIT SIZE)

Inches	From	Feet	To	Feet
<u>8</u>	<u>0</u>		<u>25</u>	

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
<u>2</u>		<u>SCH. 40</u>	<u>0</u>	<u>25</u>

PERFORATIONS:

Type of perforation: Manufactured
Size of perforation: .020
From 10 Feet To 35 Feet
From _____ Feet To _____ Feet
From _____ Feet To _____ Feet

ANNULAR MATERIALS

Sanitary Seal _____ to _____ Pumped Poured
 Neat Cement 6 to 0 Pumped Poured
 Cement Grout _____ to _____ Pumped Poured
 Concrete Grout _____ to _____ Pumped Poured
 Bentonite Chips 8 to 6 Pumped Poured
 Bentonite Grout _____ to _____ Pumped Poured
 15 % 20 % Other, explain: _____
 Gravel Pack [> 0.2 in.] _____ to _____ Pumped Poured
 Sand Pack [< 0.2 in.] 8 to 25 Pumped Poured
 Other, explain: _____ to _____ Pumped Poured

Date started: 11-29 .20 12
Date completed: 11-29 .20 12

7. WATER QUALITIES
Static water level: 16 Feet below land surface
Artesian Flow: _____ G.P.M. _____ P.S.I.
Water Temperature: _____ ° Fahrenheit
Water Quality: _____

8. WELL TEST DATA

Test Method: Bailer Pump Air Lift

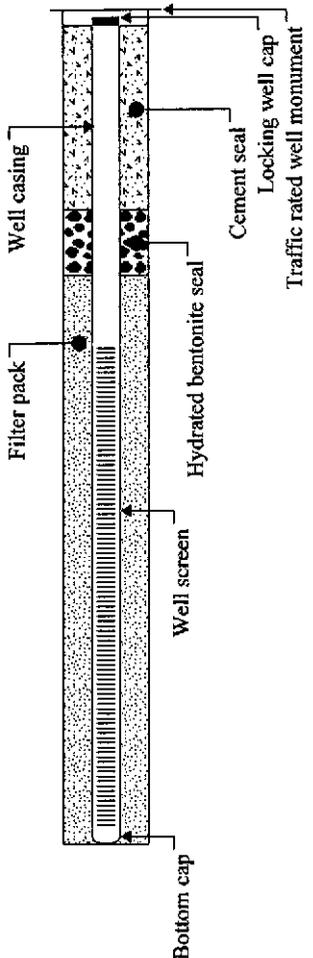
G.P.M.	Draw Down (Feet Below Static)	Recorded Time (Hours)
	<u>NAD 27</u>	
	<u>40.964629°N</u>	
	<u>117.743832°W</u>	

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision. This report is true to the best of my knowledge.
Name Gregg Drilling & Testing Contractor
Address 950 Howe Rd Martinez CA 94553 Contractor
Nevada contractor's license number as issued by the State Contractor's Board: C23-0038113
Nevada well driller's license number as issued by the Nevada Division of Water Resources (on-site driller): M-2328
Signed: [Signature]
By driller performing actual drilling on site or contractor
Date: 11-29-12

RECEIVED
2012 DEC 31 PM 12:04
STATE ENGINEERS OFFICE

Project #: MTC001
Project: Model T Casino
Client: Model T Casino
Site Location: Winnemucca, NV

Log: W-26
Supervisor: J. Fike
Reviewed by: T. Johnston

SAMPLES/LITHOLOGIC/MEASUREMENTS					BOREHOLE/WELL	
Depth (ftgs)	Sample Interval	Lithologic Symbol	Lithologic Description	PID (ppm)	Water Levels	Construction/Completion Schematic
0			Ground Surface			
1			Asphalt			
2			Silty SAND w/Gravel (SM-GM) Dark brown, dry. 30% gravel. Medium. Sub-angular. 40% sand. fine to medium grained. Sub-angular and sub-rounded. 30% silt. No plasticity. Medium dense. No hydrocarbon (HC) odor.			
3						
4						
5						
6			SAND (SP) Brown, damp. 100% sand. Poorly graded fine grained w/trace medium. Sub-angular and sub-rounded. Medium dense. No HC odor.			
7						
8						
9			Organic SILT w/Sand (OL) Olive brown mottled with gray, moist. 10% sand. Fine grained. 90% organic silt. Slight plasticity. Trace organic litter and moderate organic odor. Soft.	1.5		
10						
11						
12						
13			Clayey SAND (SC) Gray, moist. 85% sand. Poorly graded medium grained. Sub-angular and sub-rounded. 10% clay. Slight plasticity. Dense. Moderate HC odor.	266		
14						
15						
16						
17						
18						
19			SAND (SW) Grayish brown w/black, white, red, and gray. Wet. 95% sand. Well graded fine to coarse grained. Angular, sub-angular, and sub-rounded. 5% gravel. Medium to coarse up to 1.5 in. Loose. No HC odor.	2.2		
20						
21						
22						
23			SAND (SP) Dark yellowish brown, wet. 100% poorly graded sand. Fine to medium grained. Sub-angular and sub-rounded. Loose. No HC odor.	2.0		
24						
25						
26			End of Borehole			
27						
28						
29						
30						

Driller: Gregg Drilling	Hole Diameter: 6 in.	Well Casing: 2" Sch 40 PVC
Method: Hollow Stem Auger	Elevation: 4279.49	Well Screen: 0.02 in.
Date: 11-29-12	Northing: 15387289.31	Filter Pack: #2 Sand
	Easting: 2856239.09	Seal: Hydrated Bentonite

Note: Lithology based on soil cuttings and rig observations.