

EW-38

STATE OF NEVADA
DIVISION OF WATER RESOURCES
WELL DRILLER'S PLUGGING REPORT

OFFICE USE ONLY
Log No. 118423
Permit No. 58355
Basin 101

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

Please complete this form in its entirety in
accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 108748

1 OWNER BARRICK GOLDSTRIKE
MAILING ADDRESS PO BOX 29
ELKO, NV 89803

ADDRESS AT WELL LOCATION BARRICK GOLDSTRIKE MINESITE
Subdivision Name: County: EUREKA

2 LOCATION SE 1/4 NE 1/4 Sec 19 T 36N N/S/R 50 E
PERMIT/WAIVER No. 58355 N/A
Issued by Water Resources Parcel No.

Latitude UTM E 11T0554196 NAD 27
Longitude N 4535640 NAD 83/WGS 84

3 TYPE OF WELL
 Domestic
 Municipal/Industrial
 Irrigation
 Monitor
 Test
 Stock

Is this well being plugged because a replacement well was drilled? NO
If yes, what is replacement well NOI?
Is there an existing well log? YES
If yes, what is NDWR well log #? 73274

4 EXISTING WELL CONSTRUCTION
Depth Drilled 1730 Feet
Depth Cased 1722'9" Feet

7 WELL PLUGGING PROCEDURE
Was well cleaned out to total depth? yes no

EXISTING CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
40	158.6	.375	0	6
30	99	.3125	0	31
20	78.59	.375	0	544
12.75	33.37	.250	+2.5	550.96

If well was not cleaned out to total depth, please explain why:
Was the well contaminated? yes no
Was the casing pulled? yes no
Was the casing over drilled? yes no

Existing Perforations:

Type of perforation	Size of perforation	From	feet to	feet
ROSCO MOSS FULL BLOW	0.125	559.96	1722.75	

If casing was left in place, please show where additional perforations were made:
Additional Perforations:
Type of perforater used:
From _____ feet to _____ feet Number of perfs per linear foot _____
From _____ feet to _____ feet Number of perfs per linear foot _____
From _____ feet to _____ feet Number of perfs per linear foot _____
From _____ feet to _____ feet Number of perfs per linear foot _____
From _____ feet to _____ feet Number of perfs per linear foot _____
From _____ feet to _____ feet Number of perfs per linear foot _____

5 WATER LEVEL
Static water level: 1120 feet below land surface
Artesian flow G.P.M. P.S.I.
Water temperature °F Quality

8 WELL PLUGGING MATERIALS
Material Used
From 1720 feet to 1100 feet BENTONITE/BARITE Pumped Poured
From 1100 feet to 20 feet 3/8 PLUG/SLURRY Pumped Poured
From 20 feet to 0 feet NEAT CEMENT Pumped Poured
From _____ feet to _____ feet Pumped Poured
From _____ feet to _____ feet Pumped Poured
From _____ feet to _____ feet Pumped Poured

6 Additional Notes or Comments
SET UP ON THE HOLE AND RAN 4 1/2" RC PIPE
CLEANED HOLE DOWN AND HIT A BRIDGE AT 1580'
DETERIORATING CASING AND CLEANED THE HOLE TO 1720'
PUMPED THE ABANDONMENT TO 1100' - 20'
ABOVE THE STATIC LEVEL
TRIPPED OUT AND USED 3/8 HOLE PLUG WITH
AN ABANDONMENT SLURRY TO 20' AND THEN NEAT
CEMENT TO SURFACE
MIXED 400 GALLONS OF WATER TO 15 BAGS (50 LBS EA)
OF SUPER PLUG & 15 BAGS (100LBS EA) OF BARITE
USED 3200 GALLONS OF SLURRY WITH
21 SUPER SACKS (2500 LBS EA)
NEAT CEMENT FROM 20' TO SURFACE
WEIGHT: 10.3LBS PER GAL

Neat Cement Fluid Weight lbs/gal
Bentonite Grout % bentonite
Date Started 12/13/2011
Date Completed 12/22/2011

9 DRILLER'S CERTIFICATION
This well was plugged and abandoned under my supervision and the report is true to the best of my knowledge.
Name ROBERT OESCHGER Contractor
Address 5905 SKY TERRACE CT Contractor
RENO, NV 89511
Nevada contractor's license number issued by the State Contractor's Board 0048915A
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 1670
Signed [Signature] By driller performing actual drilling on site or contractor
Date 12-22-2011

(Rev. 05-06)

USE ADDITIONAL SHEETS IF NECESSARY

40.972030°N
116.355880°W NAD27

STATE ENGINEER

APR 10 2012


FACSIMILE RCVD

NAC 544-20

Dry hole plug -
Static level 10' above
50' cement to surface 05/20/98

WELL COMPLETION DIAGRAM EW-38

A.C. Edge
14-May-98

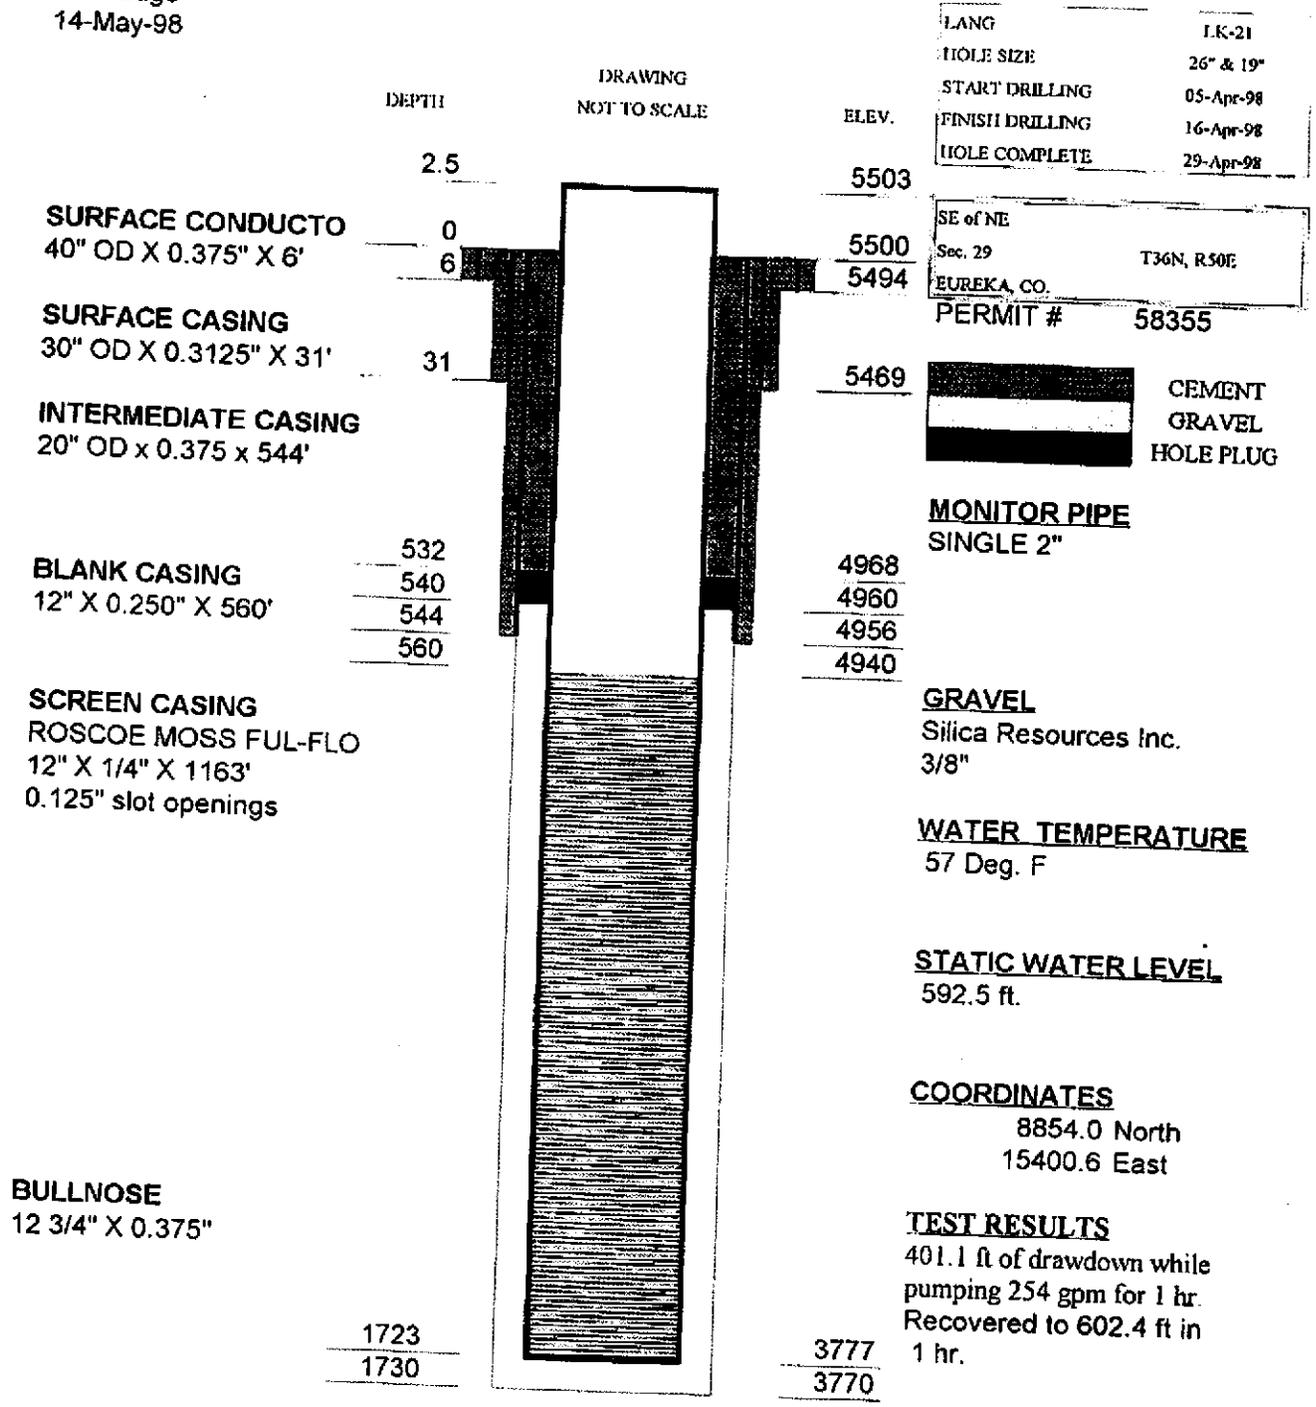

EW-38CD.WK4

STATE ENGINEER

APR 10 2012

FACSIMILE RCVD