APN-162-17-101-017 SM

[redacted]

WELL LOG AND REPORT TO THE STATE ENGINEER OF NEVADA

Log No. 55931
Rec. 19
Well No.
Permit No.
Do not fill in

Owner: Frank Wooley
Driller: H. H. Smith
Address:
Address: 1819 Decatur Las L.V. Lic. No. 186

Location of well: ~~NW¼ NW¼~~ N½ SE¼ SW¼ Sec. 17, T. 21 ~~N~~/S, R. 61 E, in Clark County

or

Water will be used for: Domestic
Total depth of well: 250'

Size of drilled hole: 10"
Weight of casing per linear foot:

Thickness of casing: 10 Quage
Temp. of water:

Diameter and length of casing: 8" X 250' Length
(Casing 12" in diameter and under give inside diameter; casing 12" in diameter give outside diameter.)

If flowing well give flow in c.f.s. or g.p.m. and pressure:

If nonflowing well give depth of standing water from surface: 20'

If flowing well describe control works:
(Type and size of valve, etc.)

Date of commencement of well: 3/3/55
Date of completion of well: 3/11/55

Type of well rig: Spudder

LOG OF FORMATIONS

From feet	To feet	Thickness feet	Type of material
0'	9'	9'	Surface Dirt
9'	25'	23'	Caleche
25'	30'	5'	Rock
30'	40'	10'	Caleche
40'	50'	10'	Sand 1st Water
50'	95'	45'	Red Clay
95'	98'	3'	Rock
98'	124'	26'	Brown clay
124'	126'	2'	Rock
126'	137'	11'	Brown clay
137'	139'	2'	Rock
139'	140'	1'	Brown Clay
140'	144'	4'	Rock
144'	110'	106'	Red Clay
110'	220'	10'	Water Gravel + Water
220'	250'	30'	Sand

(OVER)

Water-bearing Formation, Casing Perforations, Etc.
Water Gravel

Chief aquifer (water-bearing formation)
from 210' to 220' ft.

Other aquifers:

First water at 50' feet.

Casing perforated
from 180' to 240' ft.

Size of perforations
1/4" Slots X 8"

918

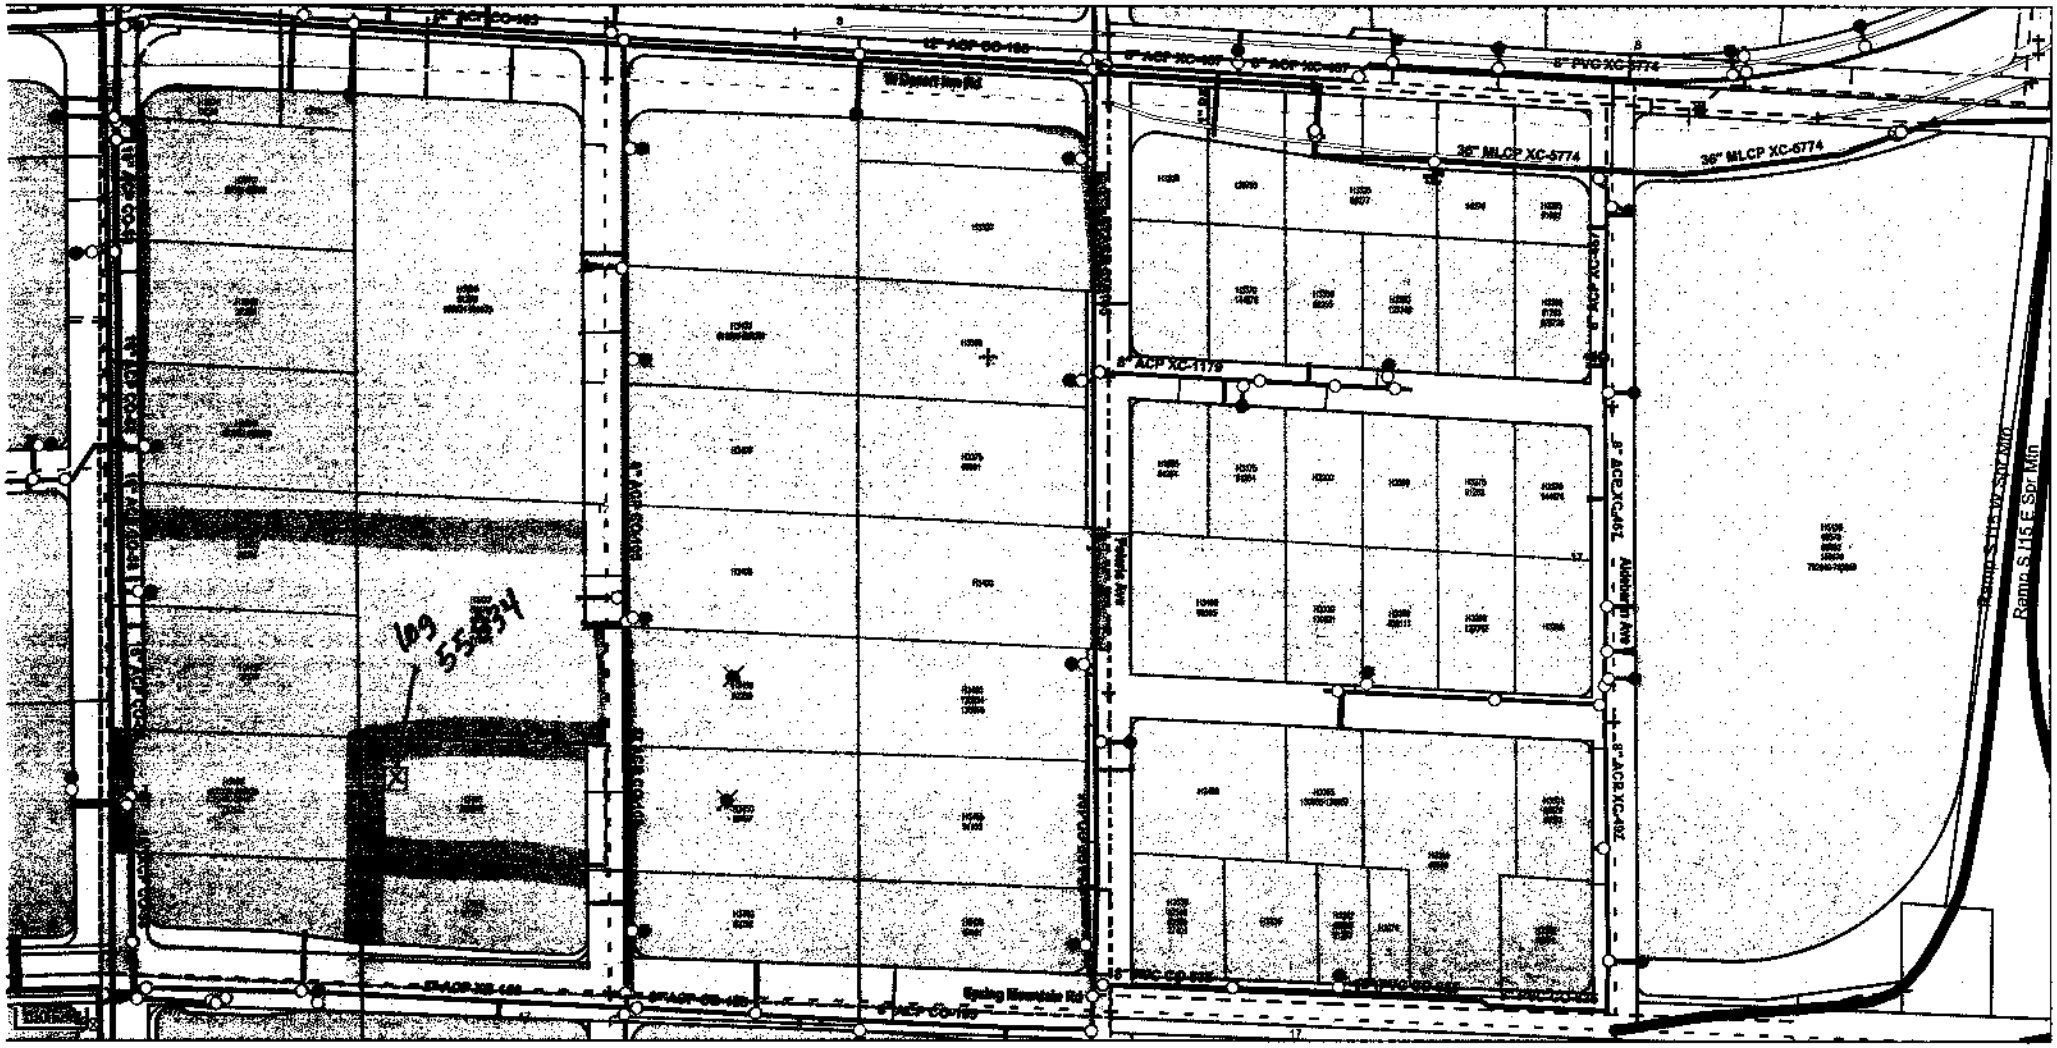

FV - 3/3/16 10:59 AM

Lon:-115.186, Lat:36.128