WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

# WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 59512
Permit No.
Basin 100

NOTICE OF INTENT NO. 24362

1. OWNER U.S.G.S. / Washoe Co. Comp. Planning
MAILING ADDRESS 333 W. Nye Ln
Carson City NV 89706

ADDRESS AT WELL LOCATION CSV #2
Nancy Gomes Elementary School
3870 Limkin, RENO NV

2. LOCATION SE ¼ SW ¼ Sec. 16 T. 21 N/S R. 18 E. Washoe County
PERMIT NO. M10-1076 Issued by Water Resources
087-020-08 Parcel No.
Subdivision Name

3. WORK PERFORMED
☑ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Abandon ☐ Other

4. PROPOSED USE
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☑ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☐ Rotary ☐ RVC
☐ Air ☑ Other Auger

6. LITHOLOGIC LOG

| Material | Water Strata | From | To | Thickness |
|---|---|---|---|---|
| Building sand | | 0 | 3 | 3 |
| Sand, coarse | | 3 | 16 | 3 |
| Sand, very fine-fine | | 16 | 22 | 6 |
| Clayey Sand | X | 22 | 27 | 5 |
| Sandy Clay | X | 27 | 30 | 3 |
| Clayey Sand | X | 30 | 38 | 8 |
| Sand, medium | X | 38 | 40 | 2 |
| Sandy Clay | X | 40 | 42 | 2 |
| Clayey Sand | X | 42 | 43 | 1 |
| Clay | | 43 | 45 | 2 |

Date started Aug 28, 1996
Date completed Aug 28, 1996

7. WELL TEST DATA
TEST METHOD: ☐ Bailer ☐ Pump ☐ Air Lift

| G.P.M. | Draw Down (Feet Below Static) | Time (Hours) |
|---|---|---|
| | | |

8. WELL CONSTRUCTION
Depth Drilled 45 Feet Depth Cased 45 Feet

HOLE DIAMETER (BIT SIZE)

| Inches | From Feet | To Feet |
|---|---|---|
| 6.6 | 0 | 45 |
| | | |
| | | |

CASING SCHEDULE

| Size O.D. (Inches) | Weight/Ft. (Pounds) | Wall Thickness (Inches) | From (Feet) | To (Feet) |
|---|---|---|---|---|
| 2 | PVC | Sch 40 | 0 | 45 |
| | | | | |
| | | | | |

Perforations:
Type perforation slot
Size perforation .010
From 40 feet to 45 feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☑ Yes ☐ No
Depth of Seal 10
Placement Method: ☐ Pumped ☑ Poured
Seal Type: ☑ Neat Cement ☐ Cement Grout ☐ Concrete Grout

Gravel Packed: ☑ Yes ☐ No
From 35' feet to 45 feet

9. WATER LEVEL
Static water level 26.89 feet below land surface
Artesian flow G.P.M. P.S.I.
Water temperature °F Quality

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name Armando R. Robledo
Address 40 USGS 333 W. Nye Ln
Carson City, NV 89706
Contractor
Nevada contractor's license number issued by the State Contractor's Board
Nevada driller's license number issued by the Division of Water Resources, the on site driller FP1859
Signed
By driller performing actual drilling on site or contractor
Date 4 Oct 96

(Rev. 3-91)

USE ADDITIONAL SHEETS IF NECESSARY

(O)-627

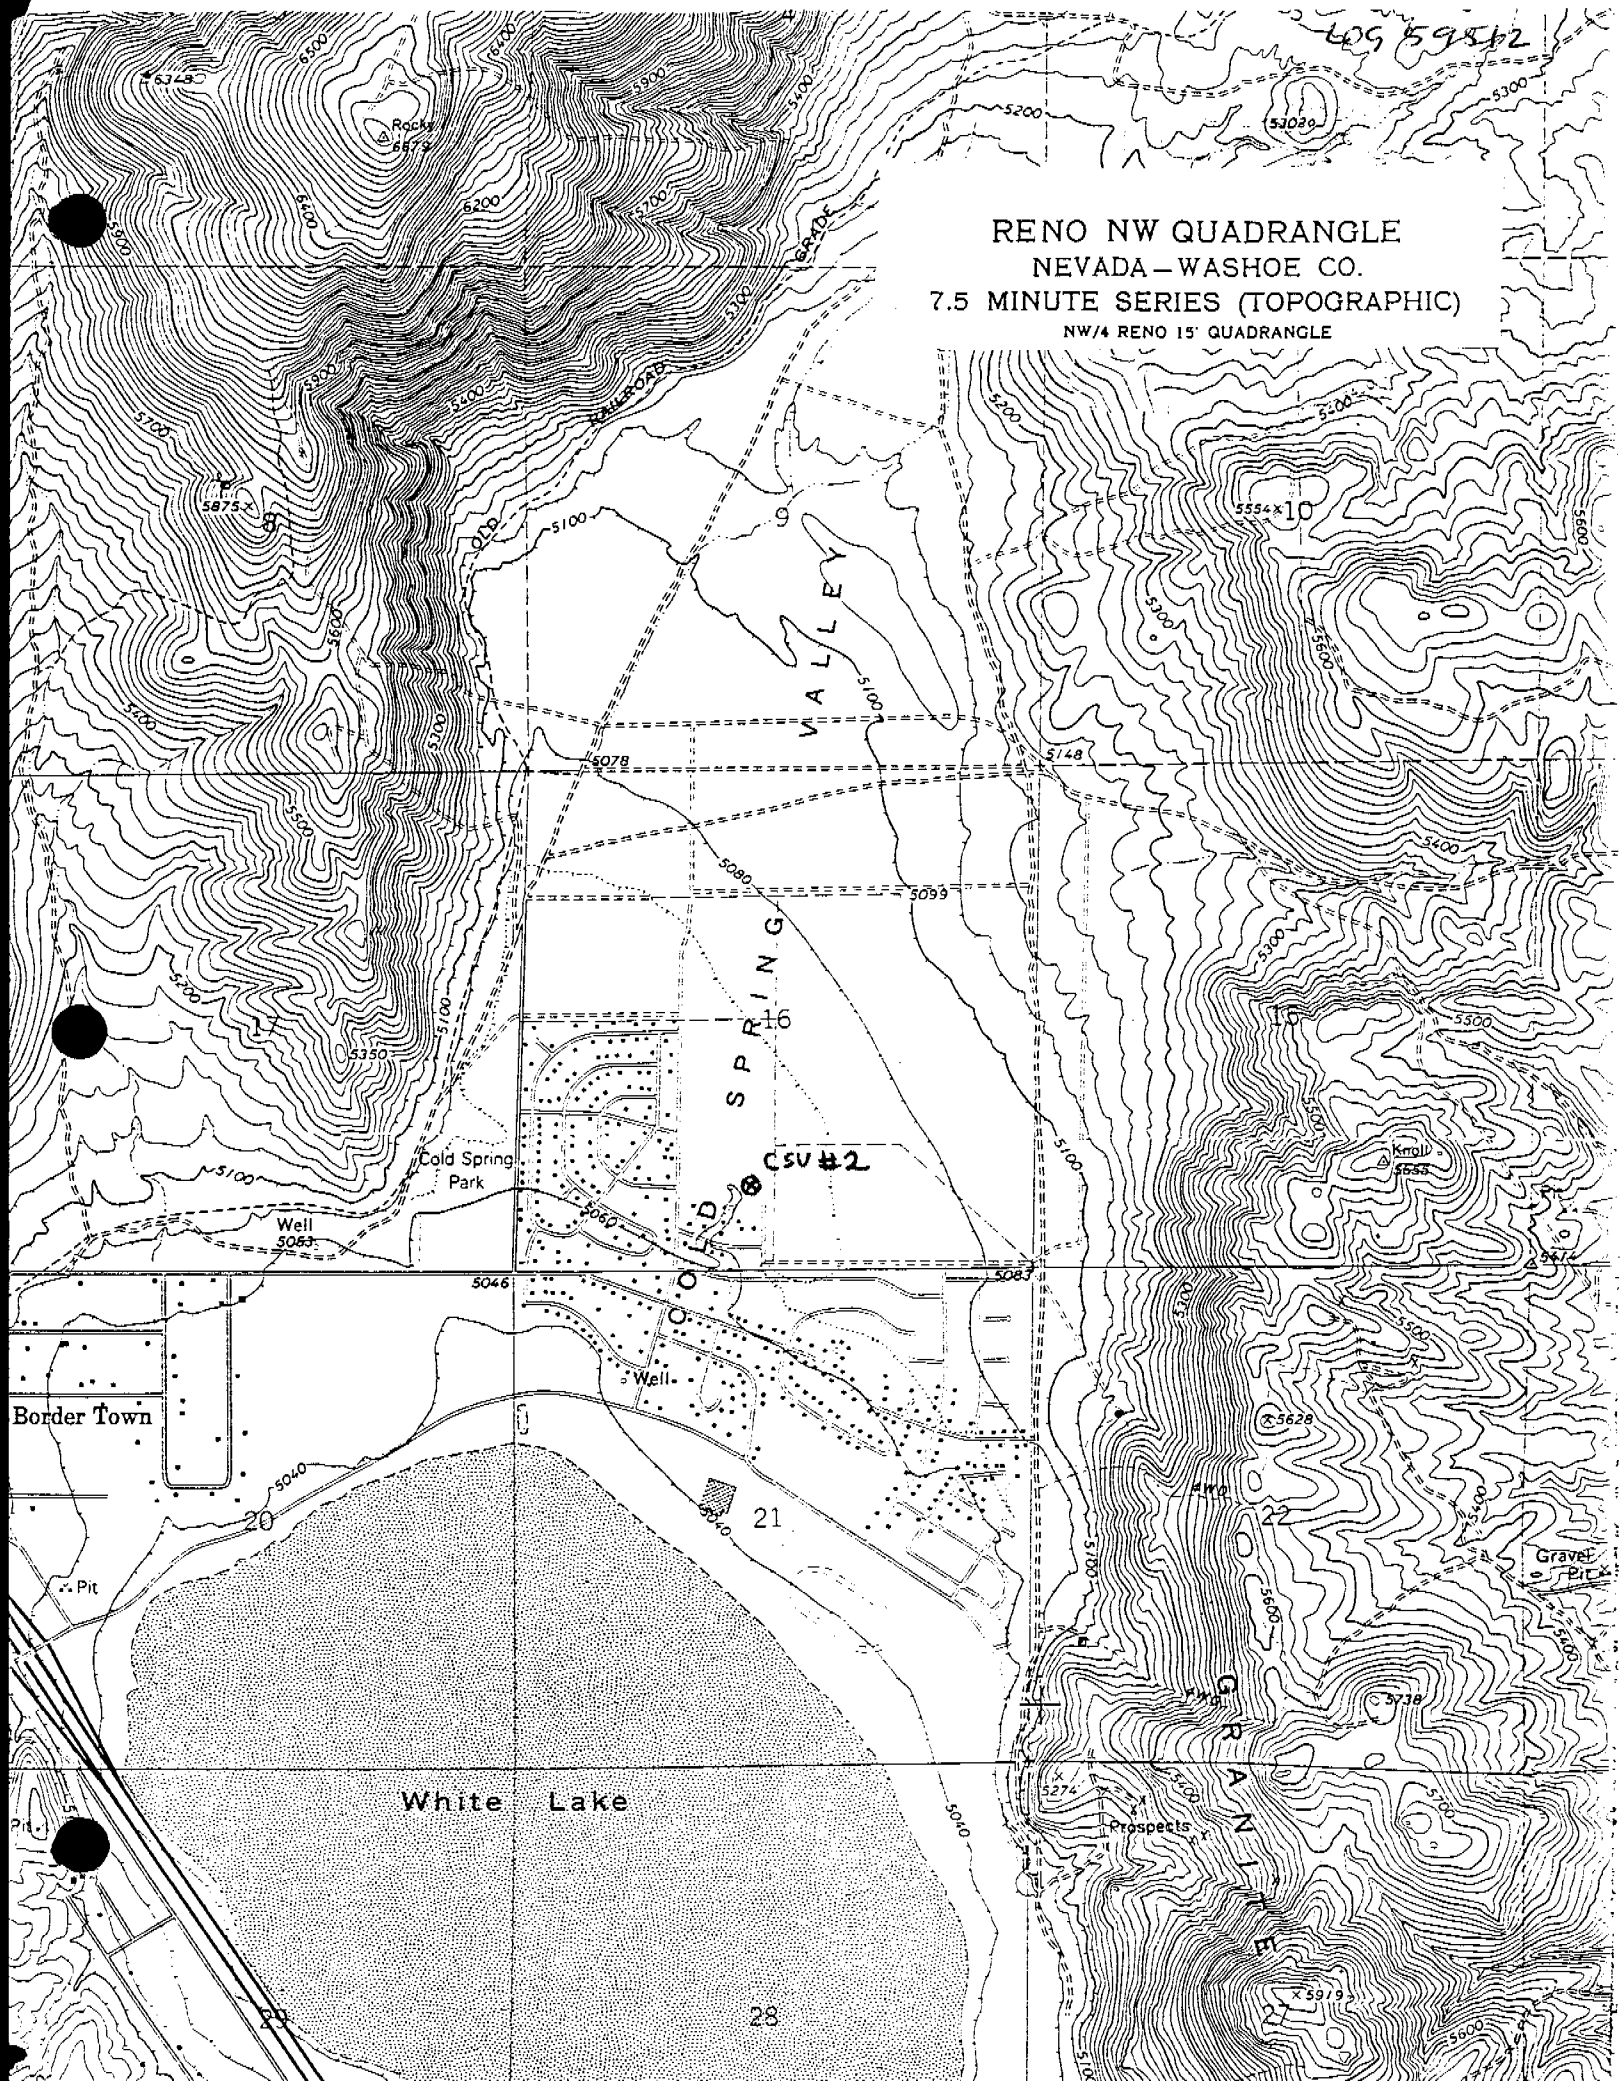

LOG 59512
RENO NW QUADRANGLE
NEVADA—WASHOE CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)
NW/4 RENO 15' QUADRANGLE
Rocky
6879
5875
5554
5350
5078
5148
5099
5080
5060
5046
5083
5040
5628
5738
5274
5919
5653
5414
Knoll
Cold Spring Park
Well
5053
Well
Border Town
Pit
White Lake
Prospects
Gravel Pit
OLD RAILROAD GRADE
COLD SPRING VALLEY
GRANITE
CSV #2
8
9
10
15
16
17
20
21
22
27
28
29