WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 73192
Permit No.
Basin 50

NOTICE OF INTENT NO. 34040

1. OWNER Newmont Gold Co.
MAILING ADDRESS PO-669
CARLIN NV, 8922-0669

ADDRESS AT WELL LOCATION Gold Quarry Pit
James Creek Tailings

2. LOCATION S/2 ¼ ~~AD~~ NE ¼ Sec. 36 T. 34N N/S R. R51 E. MDB&M Eureka County

PERMIT NO. M/0246-I
Issued by Water Resources | Parcel No. | Subdivision Name

3. WORK PERFORMED
☐ New Well ☐ Replace ☐ Recondition
☐ Deepen ☒ Abandon ☐ Other

4. PROPOSED USE
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☒ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☐ Rotary ☐ RVC
☐ Air ☐ Other

6. LITHOLOGIC LOG

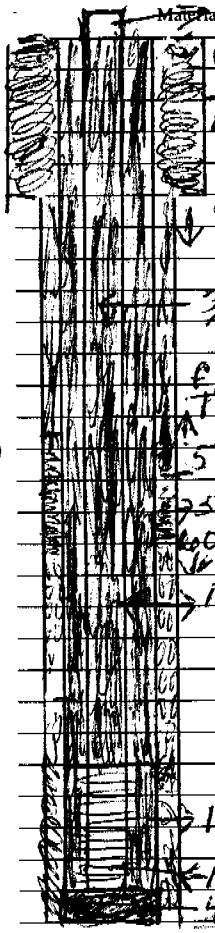

Material	Water Strata	From	To	Thickness
3/4 Trimie Pipe				
Cement to Ground Surface				
12"				
Hole to 20'				
8½ Hole to 80'				
3/4" Trimie Pipe, That we pumped Neat Cement from The bottom up to The surface, from 80' to Ground Level.				
50' Cement Seal				
25' Bentonite Seal				
60' Gravel pack around 4" pipe				
Neat Cement				
10' PVC Screen 10-20 Slot				
Neat Cement				
4" plastic End Cap				

Date started 3/27, 1997
Date completed 3/27, 1997

7. WELL TEST DATA

TEST METHOD: ☐ Bailer ☐ Pump ☐ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)

8. WELL CONSTRUCTION
Depth Drilled 80 Feet Depth Cased 80 Feet

HOLE DIAMETER (BIT SIZE)

	From	To
12 Inches	0 Feet	20 Feet
8½ Inches	20 Feet	80 Feet
Inches	Feet	Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
4.5 PVC	2.82	0337 sch80	+2	80

Perforations:
Type perforation PVC-10-20 Screen
Size perforation Horizontal Slots
From 20 feet to 80 feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☒ Yes ☐ No
Depth of Seal
Placement Method: ☒ Pumped ☐ Poured

Seal Type:
☒ Neat Cement
☐ Cement Grout
☐ Concrete Grout
3% Bentonite

Gravel Packed: ☒ Yes ☐ No
From 20 feet to 80 feet

9. WATER LEVEL
Static water level 30 feet below land surface
Artesian flow 5 to 7 G.P.M. P.S.I.
Water temperature 54 °F Quality

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name O'Keefe Drilling
Contractor
Address PO Box 3810 Butte Mt. 58702
Contractor

Nevada contractor's license number issued by the State Contractor's Board C-23-00-30581
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 1703
Signed Frank Crick
By driller performing actual drilling on site or contractor
Date 3/29/97

(Rev. 3-91) USE ADDITIONAL SHEETS IF NECESSARY (O)-627