WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 79063
Permit No.
Basin 87

NOTICE OF INTENT NO. 33553

1. OWNER HIGHWAY RENTALS
MAILING ADDRESS 1120 TERMINAL WAY RENO, NV
ADDRESS AT WELL LOCATION 1120 TERMINAL WAY RENO, NV

2. LOCATION SW ¼ NE ¼ Sec. 18 T. 19N N/S R. 20E E. WASHOE County
PERMIT NO. (Issued by Water Resources) 01332211 (Parcel No.) SW, NE, 18 19N 20E (Subdivision Name)

3. WORK PERFORMED
☐ New Well ☐ Replace ☐ Recondition
☐ Deepen ☒ Abandon ☐ Other

4. PROPOSED USE
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☐ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☐ Rotary ☐ RVC
☐ Air ☐ Other

6. LITHOLOGIC LOG MW-06

Material	Water Strata	From	To	Thickness
NEAT CEMENT AND GROUT				

SEE attached

RECEIVED 99 NOV 29 AM 11:23 STATE ENGINEER'S OFFICE

Date started 5-8-99, 19
Date completed 5-8-99, 19

7. WELL TEST DATA
TEST METHOD: ☐ Bailer ☐ Pump ☐ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)

8. WELL CONSTRUCTION
Depth Drilled 25 Feet Depth Cased Feet

HOLE DIAMETER (BIT SIZE)
Inches From Feet To Feet
Inches Feet Feet
Inches Feet Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)

Perforations:
Type perforation
Size perforation
From feet to feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☐ Yes ☐ No
Depth of Seal
Placement Method: ☐ Pumped ☐ Poured
Seal Type: ☐ Neat Cement ☐ Cement Grout ☐ Concrete Grout
Gravel Packed: ☐ Yes ☐ No
From feet to feet

9. WATER LEVEL
Static water level 12.23 feet below land surface
Artesian flow G.P.M. P.S.I.
Water temperature °F Quality

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name WESTERN STRATA EXPLORATION (Contractor)
Address P.O. Box 1664 (Contractor)
WEST SACRAMENTO, CA 95691
Nevada contractor's license number issued by the State Contractor's Board 0033695A
Nevada driller's license number issued by the Division of Water Resources, the on-site driller M1978
Signed (By driller performing actual drilling on site or contractor)
Date NOVEMBER 23, 1999

(Rev. 3-91) USE ADDITIONAL SHEETS IF NECESSARY (O)-627

SOIL BORING AND WELL CONSTRUCTION LOG: MW-6

Project: C-262

CLEARWATER GROUP INC.

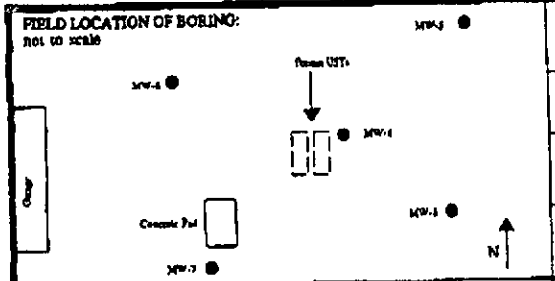

DRILLING CONTRACTOR: West Hazmat	BORING DIAMETER: 6 5/8 inches	CLIENT/LOCATION: Former Alamo Rent A Car, 1120 Terminal Way, Reno NV	
DRILL RIG OPERATOR: Darren Mora	BORING DEPTH: 25.5 Feet	SCREEN SLOT SIZE: 0.02 inches	DRILLING DATE: 5/08/99
DRILL RIG TYPE: CME 85	WELL DEPTH: 25 feet	WELL MATERIAL: 2-inch dia. PVC	FILTER PACK: #3 Lonestar Sand
WELL SEAL: Neat Cement over hydrated bentonite		PLANNED USE: Monitoring	LOGGED BY: Ruary Allan
SAMPLING METHOD: No Samples Collected		MONITORING INST: N.A.	APPROVED BY: Brian Gwinn, R.G.
FIRST ENCOUNTERED WATER DEPTH: 13 Feet below grade		DATE:STATIC WATER DEPTH - DATE: 12.23 Feet below TOC - 5/21/99	

WELL CONSTRUCTION DETAIL	WATER LEVEL	DEPTH (FEET)	SAMPLING INTERVAL	SAMPLING RECOVERY	OVM READING (PPM)	GRAPHIC LOG OR USCS CODE	
							Fill Material
		1–10					GRAVEL (GP); granitic and volcanic boulders and cobbles; little silt and sand, silt content increasing with depth.
		11–18					Silty SAND with gravel (SM); multicolored, predominantly coarse grained.
		19–25					Well-graded SAND with gravel (SW); multicolored, subrounded; little silt, trace pyrite flakes.
		26–30					Logging performed by recovery of cuttings.