WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 79989
Permit No.
Basin 92A

NOTICE OF INTENT NO. 42719

1. OWNER Dept of Water Resources
MAILING ADDRESS 9930 Gregg Way Reno, NV 89502
ADDRESS AT WELL LOCATION Stead

2. LOCATION NE ¼ SW ¼ Sec. 31 T. 21 N/S R. 19 E. Stead Washoe County
PERMIT NO. 006581 (Issued by Water Resources) 55002002 (Parcel No.) (Subdivision Name)

3. WORK PERFORMED
☒ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Abandon ☐ Other

4. PROPOSED USE
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☒ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☐ Rotary ☐ RVC
☐ Air ☒ Other Auger

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
Silt w-gravel		0		5
Sand w-gravel		5		10
Sandy Silt		10		20
Sandy Clay		20		30
Sandy Clay	X	30		40
Sandy Clay w-gravel		40		50
Sandy Silt w-gravel		50		55

* used neat cement to grout the bottom 20 feet

Date started 12-3-99, 19
Date completed 12-3-99, 19

7. WELL TEST DATA
TEST METHOD: ☐ Bailer ☐ Pump ☐ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)

8. WELL CONSTRUCTION
Depth Drilled 55 Feet Depth Cased 35 Feet

HOLE DIAMETER (BIT SIZE)
9" Inches From 0 Feet To 55 Feet
Inches Feet Feet
Inches Feet Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
4"		50 40	0	35

Perforations:
Type perforation Factory Cut
Size perforation 040
From 10 feet to 35 feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☒ Yes ☐ No
Depth of Seal 9 feet
Placement Method: ☒ Pumped ☐ Poured
Seal Type: ☒ Neat Cement ☐ Cement Grout ☐ Concrete Grout

Gravel Packed: ☒ Yes ☐ No
From 9 feet to 35 feet

9. WATER LEVEL
Static water level 30 feet below land surface
Artesian flow G.P.M. P.S.I.
Water temperature Cool °F Quality

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name West Hazmat (Contractor)
Address 3233 Fitzgerald (Contractor)
Rancho Cordova Ca 95742
Nevada contractor's license number issued by the State Contractor's Board 31386
Nevada driller's license number issued by the Division of Water Resources, the on-site driller M2079
Signed [signature] By driller performing actual drilling on site or contractor
Date 1-27-00

(Rev. 3-91) USE ADDITIONAL SHEETS IF NECESSARY (O)-627

Sheet 1 of

Date: 12/3/99

By D. Bugering

Ck. By:

Job/Proj. No: 97046.50

RENO STEAD WATER REC.

MONITORING WELLS

SITE MEET w/ DRILLER

log# 79989

CAP FRINGE ~12'
W.L. ~17' @ ~0540
Current depth 20'
Depth Descr.
1-7' Sandy gravel
7-12 Gravelly clay
12-20 ~~SAND~~ GRAVELLY SAND

MON. WELL I.D.s

MW-3 - Sports Complex

MW-1 - UPGRAD @ G.L.

MW-2 - DOWNGRAD @ G.L.

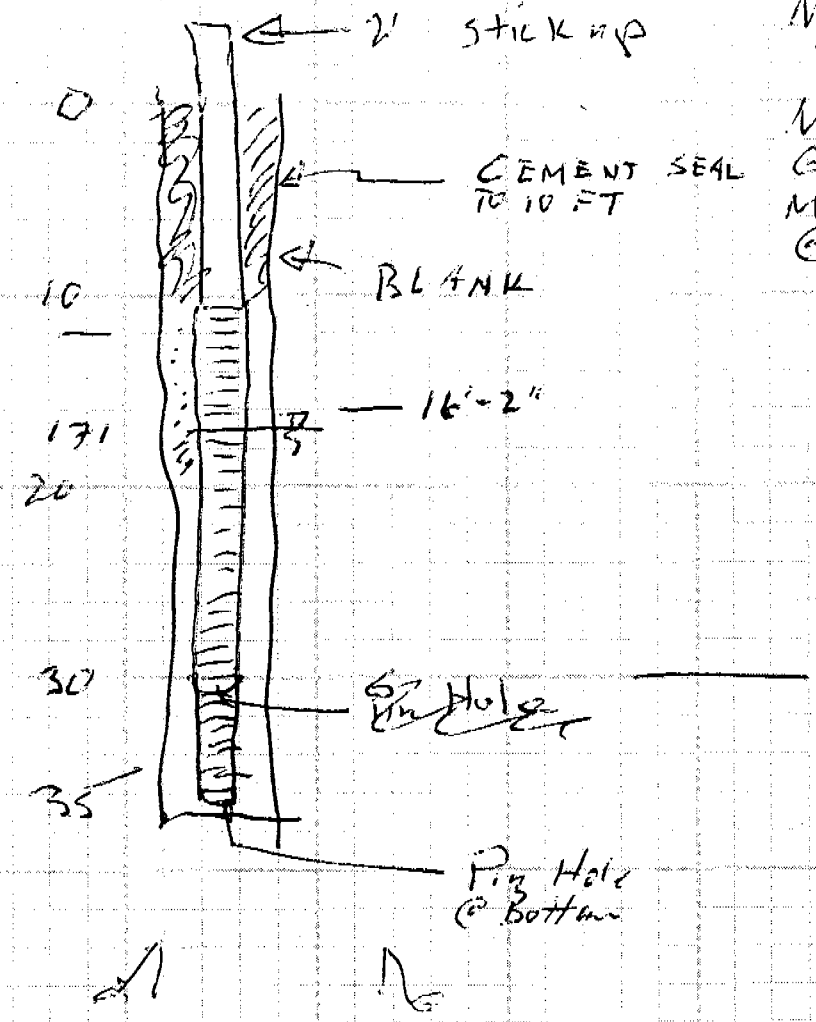

if tight, clay @ 30' TD The well

✓ SLOTS - 0.040" SLOT SIZE

✓ LOCKING MONUMENTS

✓ 8X12 Silica SAND - Industrial Sand Inc
Ogle bay Norton

Del C. B

916-761-5941 Cell Phone

Brett Arenas

AGRA
ENGINEERING GLOBAL SOLUTIONS

54.1.1 log # 79989

848
1004

5 Sandy slit with gravel
10 - Sandy slit w/gravel
15 - Sandy slit w/ COBBLES
20 - sandy slit w/gravel
25 - Clay w/ Sand
30 Sandy Clay slit — water -- No more the 2" inc.
35 Sandy Slit w/gravel
40 Sandy Clay w/gravel
45 Slity Sandy clay w/gravel
50 Sandy Clay with gravel
55 Slit/Clay/Sand/gravel 54.1 ← Stable water
60 Slit Sand w/gravel — water - hit first water