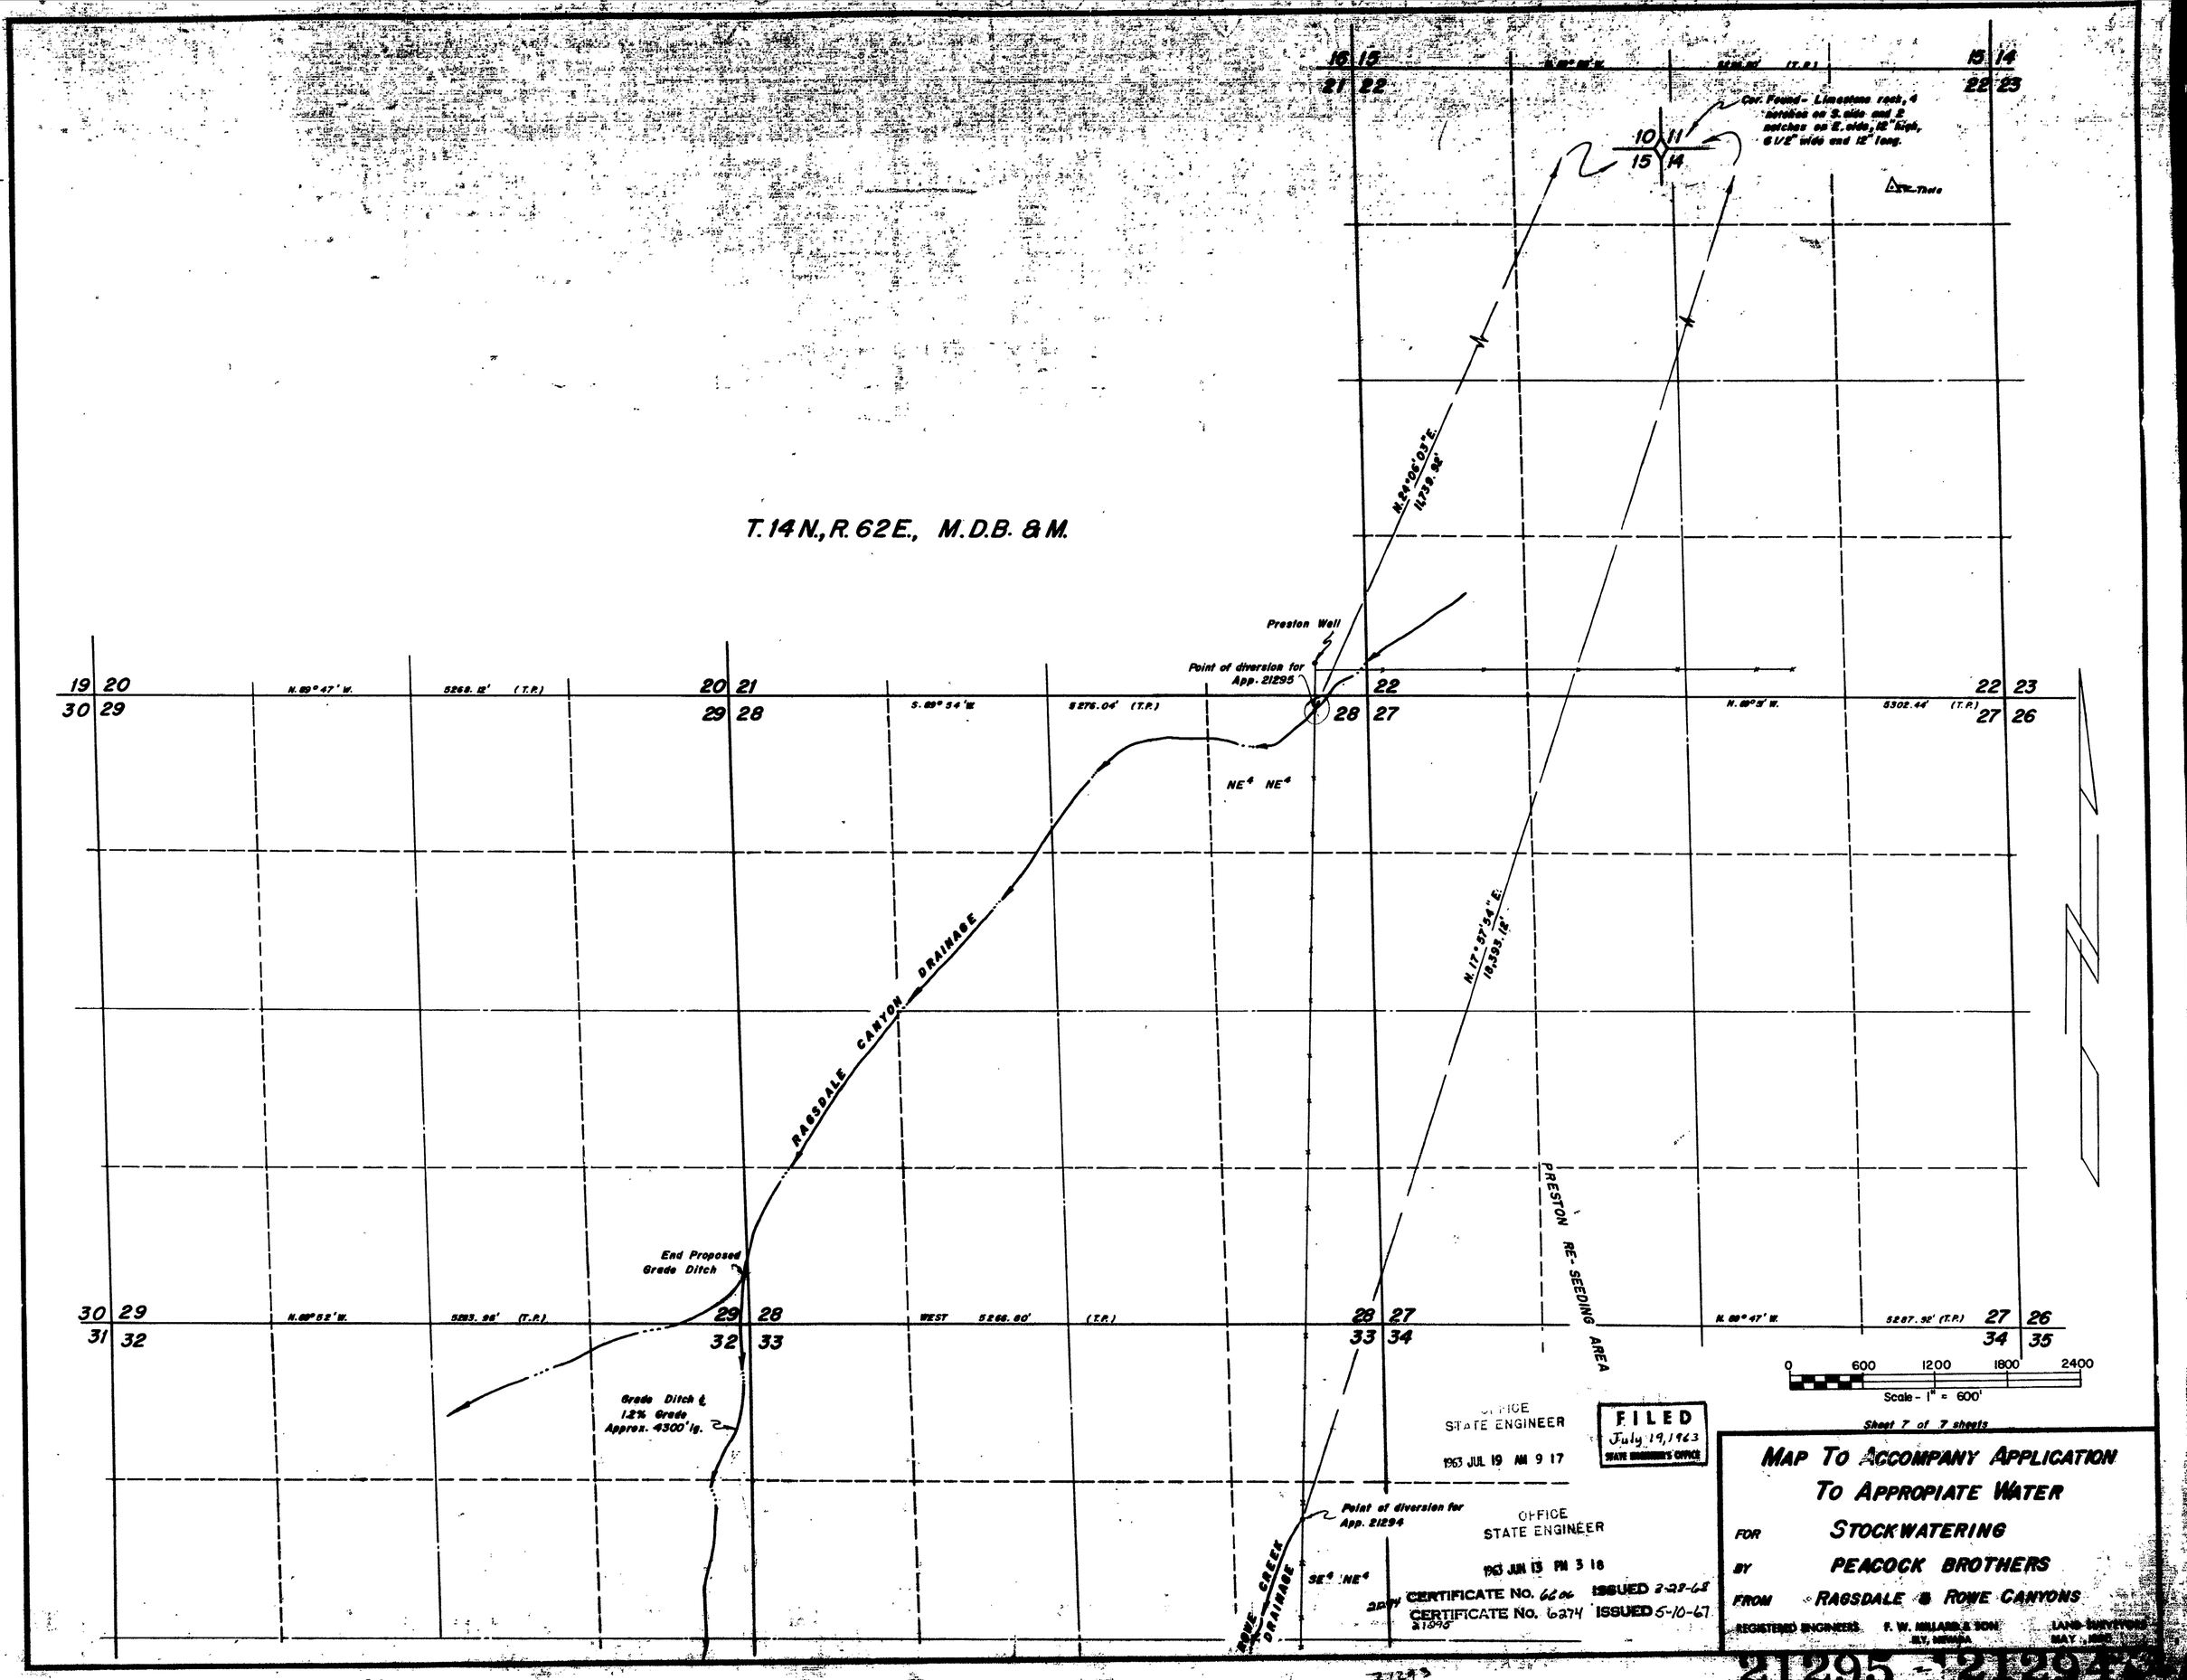

T. 14 N., R. 62 E., M.D.B. & M.
Cor. Found - Limestone rock, 4 notches on S. side and 2 notches on E. side, 12" high, 6 1/2" wide and 12" long.
Preston Well
Point of diversion for App. 21295
N. 24°06'03" E. 11,739.92'
N. 17°57'54" E. 18,393.12'
RAGSDALE CANYON DRAINAGE
PRESTON RE-SEEDING AREA
End Proposed Grade Ditch
Grade Ditch ℄ 1.2% Grade Approx. 4300' lg.
Point of diversion for App. 21294
ROWE CREEK DRAINAGE
N. 89° 47' W. 5268.12' (T.P.)
S. 89° 54' W. 5276.04' (T.P.)
N. 89° 5' W. 5302.44' (T.P.)
N. 89° 52' W. 5283.96' (T.P.)
WEST 5266.80' (T.P.)
N. 89° 47' W. 5287.92' (T.P.)
0 600 1200 1800 2400
Scale - 1" = 600'
Sheet 7 of 7 sheets
OFFICE STATE ENGINEER 1963 JUL 19 AM 9 17
FILED July 19, 1963 STATE ENGINEER'S OFFICE
OFFICE STATE ENGINEER 1963 JUN 13 PM 3 18
CERTIFICATE No. 6606 ISSUED 3-28-68
CERTIFICATE No. 6274 ISSUED 5-10-67
MAP TO ACCOMPANY APPLICATION TO APPROPIATE WATER
FOR STOCKWATERING
BY PEACOCK BROTHERS
FROM RAGSDALE & ROWE CANYONS
REGISTERED ENGINEERS F. W. MILLARD & SON ELY, NEVADA
LAND SURVEYORS MAY, 1960
21295 - 21294