

PRINT OR TYPE ONLY  
DO NOT WRITE ON BACK

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 67890

1. OWNER Klondex Gold and Silver ADDRESS AT WELL LOCATION 3 miles N. of Crescent Valley Then 4 mi. west  
MAILING ADDRESS 1250 Lamoille Highway Suite 312 Eiko, NV. 89801

2. LOCATION SW 1/4 NW 1/4 Sec. 24 T. 30 N/S R. 47 E. Eureka County (Lander)  
PERMIT NO. 007-060-34 Issued by Water Resources Parcel No. Subdivision Name

3. WORK PERFORMED  
 New Well  Replace  Recondition  
 Deepen  Abandon  Other

4. PROPOSED USE  
 Domestic  Irrigation  Test  
 Municipal/Industrial  Monitor  Stock

5. WELL TYPE  
 Cable  Rotary  RVC  
 Air  Other

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thick-ness
<u>Alluvium</u>		<u>0</u>	<u>340</u>	<u>340</u>
<u>Basalt</u>		<u>340</u>	<u>610</u>	<u>270</u>
<u>NAD 27</u>				
<u>UTM 531, 765</u>				
<u>UTM 4, 478, 479</u>				
<u>Facility ID# WECPNEV2007104</u>				

8. WELL CONSTRUCTION  
Depth Drilled 610 Feet Depth Cased 605 Feet

HOLE DIAMETER (BIT SIZE)  
From 10 3/4 Inches To 20 Feet  
6 Inches 20 Feet 610 Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
<u>2</u>		<u>Sch 80</u>	<u>0</u>	<u>605</u>

Perforations:  
Type perforation Slot  
Size perforation .020  
From 580 feet to 600 feet

Surface Seal:  Yes  No Seal Type:  Neat Cement  
Depth of Seal 20'  Cement Grout  
Placement Method:  Pumped  Poured  Concrete Grout

Gravel Packed:  Yes  No  
From 570 feet to 610 feet

9. WATER LEVEL  
Static water level 576 feet below land surface  
Artesian flow \_\_\_\_\_ G.P.M. \_\_\_\_\_ P.S.I.  
Water temperature N/A °F Quality \_\_\_\_\_

Date started 9-20, 2011  
Date completed 9-23, 2011

7. WELL TEST DATA

TEST METHOD:  Bailer  Pump  Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)
<u>1.5</u>		
<u>40</u>	<u>458268° N</u>	<u>NAD27</u>
<u>116</u>	<u>625363° W</u>	


10. DRILLER'S CERTIFICATION  
This well was drilled under my supervision and the report is true to the best of my knowledge.

Name Envirotech Drilling Co Contractor  
Address 4105 W. Winnemucca Blvd. Winnemucca, NV. 89445 Contractor  
Nevada contractor's license number issued by the State Contractor's Board 0075392  
Nevada driller's license number issued by the Division of Water Resources, the on-site driller M-1769  
Signed Waven Haulty  
By driller performing actual drilling on site or contractor  
Date 10-5-11

NOI 67890

NAD 27

UTM 531,765 UTM 4,478,479

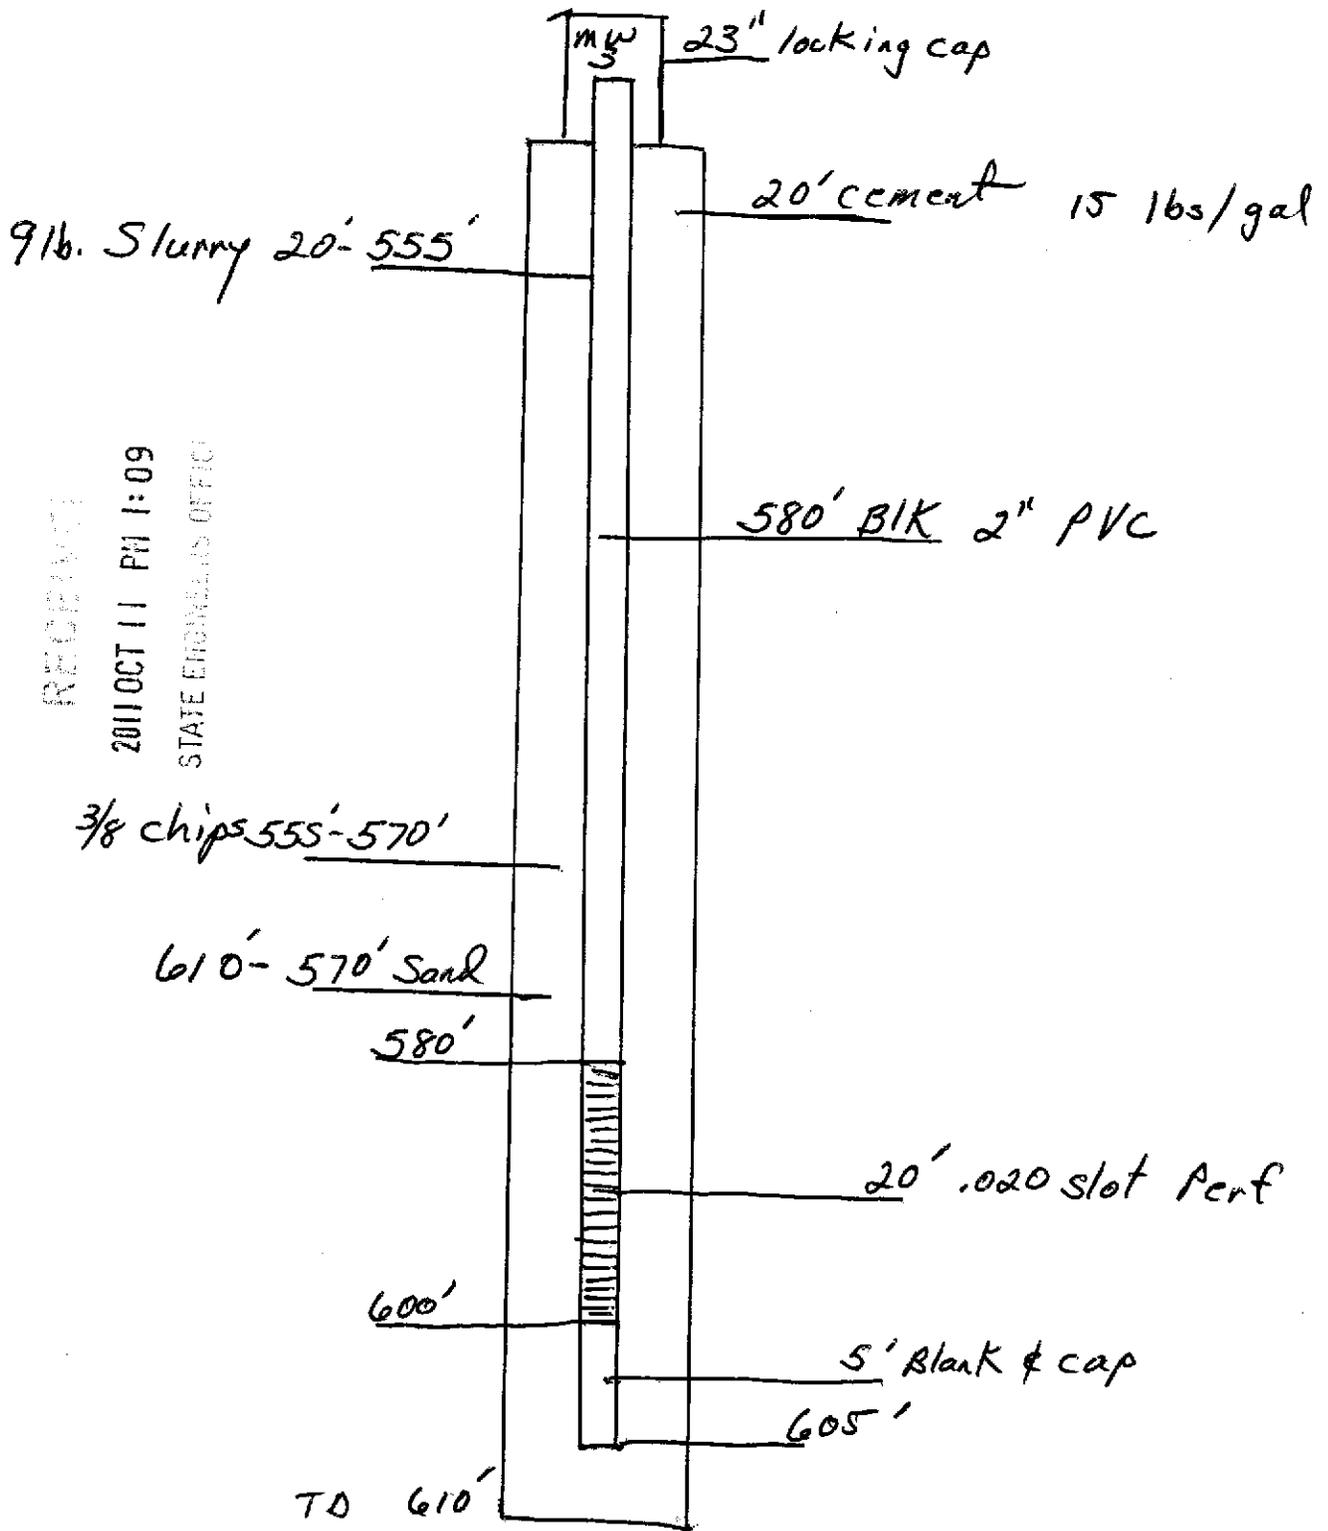

RECEIVED  
2011 OCT 11 PM 1:09  
STATE ENGINEER'S OFFICE

3/8 chips 555'-570'

610'-570' Sand

580'

20' .020 slot Perf

600'

5' Blank & cap

605'

TD 610'