STATE OF NEVADA
DIVISION OF WATER RESOURCES
WELL DRILLER'S REPORT

OFFICE USE ONLY
Log No. 118354
Permit No.
Basin 108

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

NOTICE OF INTENT NO. 69326

1. OWNER Jack Oman (Atlantic Richfield Company)
MAILING ADDRESS 4 Centerpoint Drive
La palma, CA 90623

ADDRESS AT WELL LOCATION Verington Mine and Surrounding Area
Subdivision Name:
County: Lyon

2. LOCATION SW ¼ NW ¼ Sec 16 T 13 N/S R 25 E
PERMIT/WAIVER No.
Issued by Water Resources
Parcel No. 014-401-15

Latitude
Longitude
UTM E 326667.60 ☒ NAD 27
N 1545184.88 ☐ NAD 83/WGS 84

3. WORKED PERFORMED
☒ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Other

4. PROPOSED USE
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☒ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☐ Rotary ☐ RVC
☐ Air ☒ Other Sonic

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
See Attatched Lithology form.				
NAD27 38.992781°N 119.186294°W	HLP-01			

RECEIVED 2013 OCT -3 AM 10:52 STATE ENGINEERS OFFICE

Date started: September 19, 20 13
Date completed: September 20, 20 13

7. Water Level
Static water level: 114 feet below land surface
Artesian Flow: G.P.M. P.S.I.
Water Temperature: °F
Quality:

8. WELL TEST DATA
TEST METHOD: ☐ Bailer ☐ Pump ☐ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)

9. WELL CONSTRUCTION
Depth Drilled 142' Feet Depth Cased 141' Feet

HOLE DIAMETER (BIT SIZE)

		From		To	
6"	Inches	0	Feet	142'	Feet
	Inches		Feet		Feet
	Inches		Feet		Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
2"	Sch 40	PVC	0	141'

Perforations:
Type of perforation factory cut
Size of perforation 0.20
From 121' feet to 141' feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Annular Seal: ☒ Yes ☐ No
☐ Neat Cement to ☐ Pumped ☐ Poured
☒ Cement Grout 115' to 3' ☒ Pumped ☐ Poured
☐ Concrete Grout to ☐ Pumped ☐ Poured
☐ ≥30% Bentonite Grout to ☐ Pumped ☐ Poured

Gravel Pack: ☒ Yes ☐ No 142 to 119 ☐ Pumped ☒ Poured
Type: #3 Sand
Bentonite Chips: ☒ Yes ☐ No 113 to 118 ☐ Pumped ☒ Poured
Type: 3/8 MEDIUM

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name Cascade Drilling
Contractor
Address 1333 W 9th Upland, CA 91786
Contractor

Nevada contractor's license number issued by the State Contractor's Board 73966
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 2475

Signed [signature]
By driller performing actual drilling on-site or contractor
Date September-20-2013

(Rev. 05-06)

USE ADDITIONAL SHEETS IF NECESSARY

(NSPO 3-08)

(O) 627

Log# 118354

BROWN AND CALDWELL

Date Checked	Checked By	Job Number	By	Date	Calc. No.	Sheet No.
		144230	CJS	9/19/13		

Project	Subject
	HLP-01 GENERALIZED LITHOLOGY LOG

GROUND ELEVATION ~4435 FT AMSL

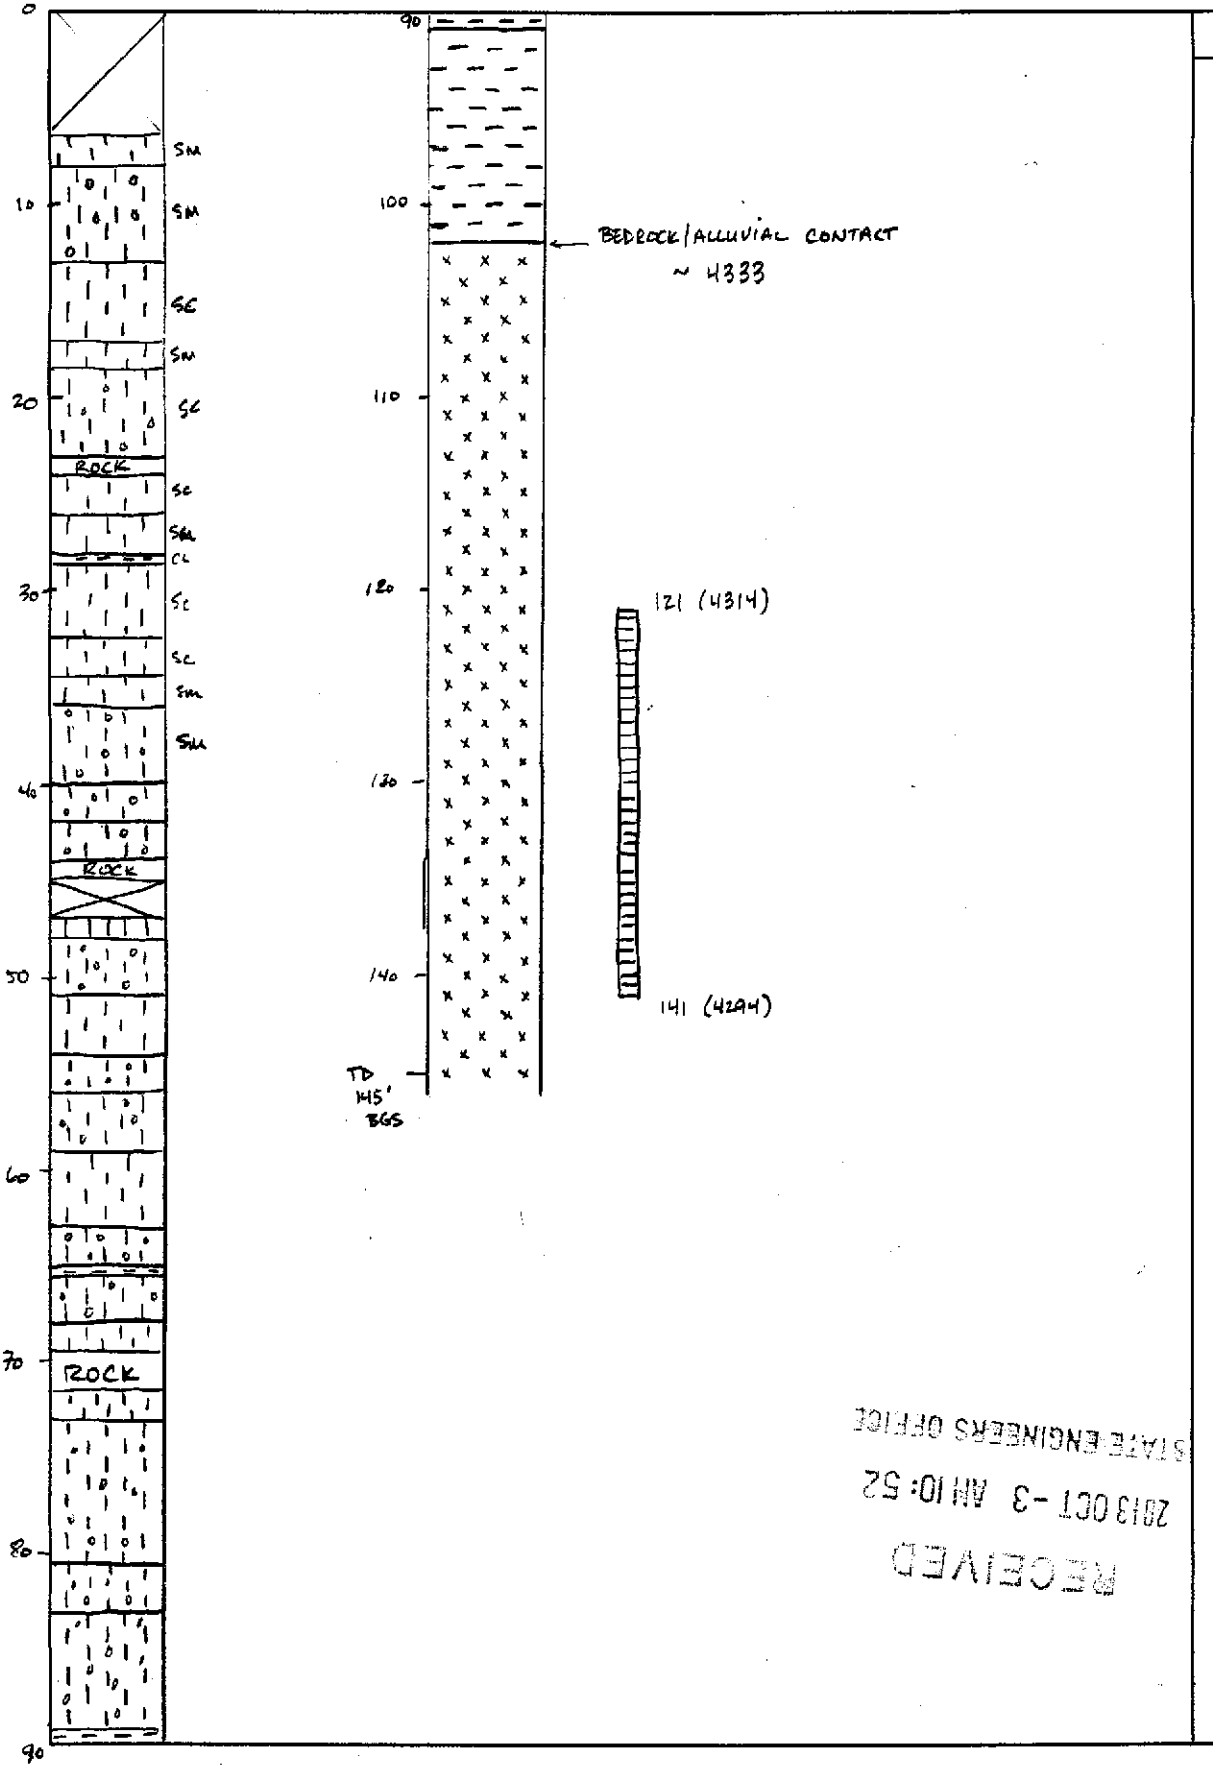

References/Notes

= <15% FINES SAND

= 15-50 % FINES SM OR SC

= ≥ 50% FINES CL OR ML

= NO RECOVERY

= GRAVEL

= BEDROCK

RECEIVED
2013 OCT -3 AM 10:52
STATE ENGINEERS OFFICE

#1590-1/10" sq.