WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety

OFFICE USE ONLY
Log No. 35805
Permit No.
Basin

PRINT OR TYPE ONLY

NOTICE OF INTENT NO. 4878

1. OWNER Time Oil Co.
MAILING ADDRESS 2737 W. Commodore Way Seattle Wa 98199
ADDRESS AT WELL LOCATION 1589 Hyde 395 Minden Nev.

2. LOCATION NE ¼ NW ¼ Sec. 32 T. 13 N/S R. 20 E. Douglas County
PERMIT NO. M/7354 (Issued by Water Resources) Parcel No. Subdivision Name

3. TYPE OF WORK
New Well ☒ Recondition ☐
Deepen ☐ Other ☐

4. PROPOSED USE MW#1
Domestic ☐ Irrigation ☐ Test ☒
Municipal ☐ Industrial ☐ Stock ☐

5. TYPE WELL
Cable ☐ Rotary ☐
Other ☒ Auger

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
Brown Silty Sand and Gravel		0	5'	5'
Tan gravelly Coarse Clean Sand		5'	15'	10'

'91 MAR 26 A9:50
STATE ENGINEER

Date started 2/7, 1991
Date completed 2/7, 1991

7. N/A WELL TEST DATA

Pump RPM	G.P.M.	Draw Down	After Hours Pump

BAILER TEST
G.P.M. N/A Draw down ..... feet ..... hours
G.P.M. ..... Draw down ..... feet ..... hours
G.P.M. ..... Draw down ..... feet ..... hours

8. WELL CONSTRUCTION
Diameter 8 inches Total depth 15' feet
..... inches
..... inches
Casing record PVC
Weight per foot 5A Thickness Sch 40

Diameter	From	To
2 inches	0 feet	15 feet
inches	feet	feet
inches	feet	feet
inches	feet	feet
inches	feet	feet
inches	feet	feet

Surface seal: Yes ☒ No ☐ Type Bentonite Grout
Depth of seal 4' feet
Gravel packed: Yes ☒ No ☐
Gravel packed from 4' feet to 15 feet

Perforations:
Type perforation Slotted
Size perforation 0.010
From 5 feet to 15 feet
From ..... feet to ..... feet
From ..... feet to ..... feet
From ..... feet to ..... feet
From ..... feet to ..... feet

9. WATER LEVEL
Static water level 2½ feet below land surface
Flow N/A G.P.M. N/A P.S.I.
Water temperature Cold °F Quality N/A

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name [signature] Contractor
Address 1633 Bellford Rd Reno Nev 89509 Contractor
Nevada contractor's license number issued by the State Contractor's Board
Nevada contractor's driller's number issued by the Division of Water Resources
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 1083
Signed [signature] By driller performing actual drilling on site or contractor
Date 3/24/91

(Rev. 11-85) USE ADDITIONAL SHEETS IF NECESSARY (O)-627

LOG OF: B-1 (MW-1)

DATE: 1-31-91

ELEV:

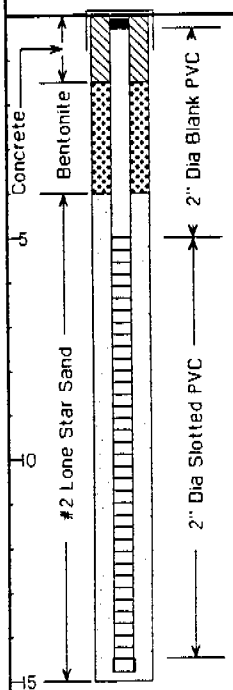

Sample No.	Blows per 6 in.	PID No.	PID (ppm)	HAL Test (ppm)
1-4.5 1-5	11 22 23	187	5.8	
1-8.5 1-9	23 22 25	188	9.5	
1-12.5 1-13	15 21 24	189	3.9	

Samples

Graphic Log

Description/Soil Classification

2 inches AC.

Brown silty sand and gravel (GM), loose, slightly moist.

Tan gravelly coarse clean sand (SP), medium dense, moist to saturated.

Coarse gravels at 8'.

BOH @ 15'

Porter Geotechnical, Ltd.

Proj No: 9101.1 Total Depth: 15

Water Level: 9.23 Driller: Andresen

A & H Liquor

Plate 3