WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 39873
Permit No.
Basin 51

NOTICE OF INTENT NO. 146857

1. OWNER Newmont Gold Co.
MAILING ADDRESS Elko Nev.
ADDRESS AT WELL LOCATION CARLIN Gold Quarry Elko Nev.

2. LOCATION NW ¼ SW ¼ Sec. 35 T. 34N N/S R. 51 E/W E EUREKA County
PERMIT NO. WAIVER MO155C (Issued by Water Resources) Parcel No. Subdivision Name

3. WORK PERFORMED
☑ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Abandon ☐ Other

4. PROPOSED USE
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☑ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☐ Rotary ☐ RVC
☑ Air ☐ Other

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
LIMESTONE		0	800	800

8. WELL CONSTRUCTION
Depth Drilled 800' Feet Depth Cased 800' Feet

HOLE DIAMETER (BIT SIZE)

		From	To
7" Inches	+2 Feet	20 Feet	
6 1/8 Inches	20 Feet	525 Feet	
5 5/8 Inches	525 Feet	800 Feet	

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
1 1/4"			+2	800

Perforations:
Type perforation KNIFE CUT
Size perforation 1 1/4" SLOTS
From 780' feet to 800' feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☑ Yes ☐ No
Depth of Seal 50'
Placement Method: ☑ Pumped ☐ Poured
Seal Type: ☑ Neat Cement ☐ Cement Grout ☐ Concrete Grout

Gravel Packed: ☑ Yes ☐ No
From 770' feet to 800' feet

9. WATER LEVEL
Static water level 220 feet below land surface
Artesian flow G.P.M. P.S.I.
Water temperature °F Quality

Date started Nov. 10, 1992
Date completed Nov. 17, 1992

7. WELL TEST DATA
TEST METHOD: ☐ Bailer ☐ Pump ☑ Air Lift

G.P.M.	Draw Down (Feet Below Static)	Time (Hours)
10-15	480'	4 hr.

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name Frank Cook
Address O'Keefe Drilling (Contractor) 1369 Southside Drive Elko Nev. (Contractor)
Nevada contractor's license number issued by the State Contractor's Board 00-30581
Nevada driller's license number issued by the Division of Water Resources, the on-site driller 1703
Signed Frank Cook (By driller performing actual drilling on site or contractor)
Date 12-1-92

(Rev. 3-91) USE ADDITIONAL SHEETS IF NECESSARY (O)-627

LOG 39873

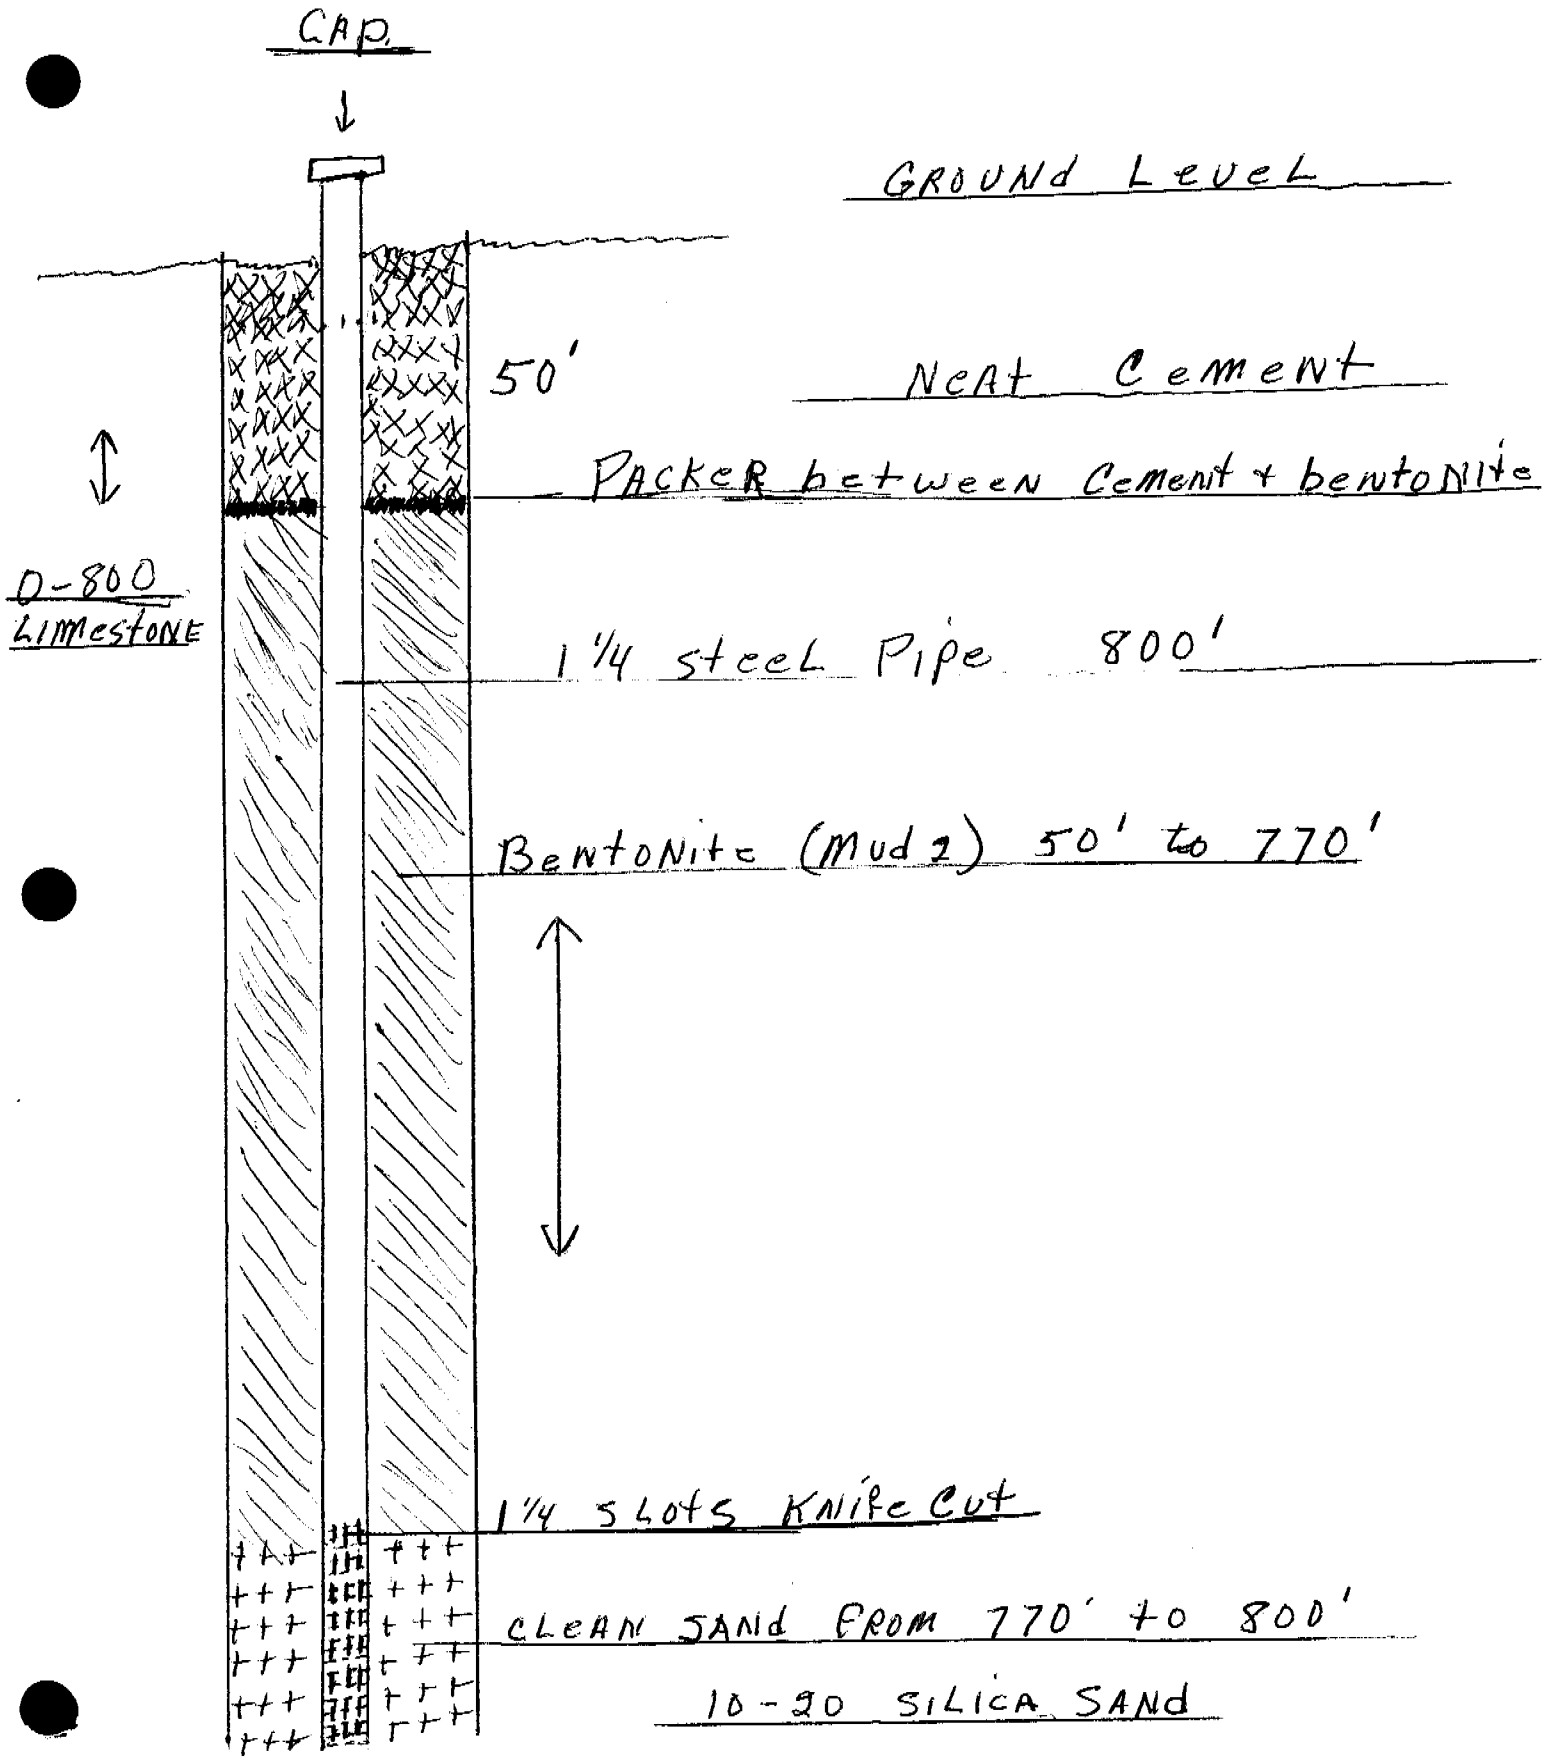
CAP.
GROUND LEVEL
50'
NEAT CEMENT
PACKER between Cement + bentonite
0-800
LIMESTONE
1 1/4 steel Pipe 800'
Bentonite (Mud 2) 50' to 770'
1 1/4 SLOTS KNIFE CUT
CLEAN SAND FROM 770' to 800'
10-20 SILICA SAND