WHITE—DIVISION OF WATER RESOURCES
CANARY—CLIENT'S COPY
PINK—WELL DRILLER'S COPY

PRINT OR TYPE ONLY
DO NOT WRITE ON BACK

STATE OF NEVADA
DIVISION OF WATER RESOURCES

WELL DRILLER'S REPORT

Please complete this form in its entirety in accordance with NRS 534.170 and NAC 534.340

OFFICE USE ONLY
Log No. 79974
Permit No.
Basin 92A

NOTICE OF INTENT NO. 42701

1. OWNER Depot of Water Resours
MAILING ADDRESS 4930 Emgy Way
Reno NV 89502

ADDRESS AT WELL LOCATION Steel

2. LOCATION NE ¼ NW ¼ Sec. 6 T. 20 N/S R. 19 E. Washoe County
PERMIT NO. 006501 (Issued by Water Resources) 090 010 04 (Parcel No.) (Subdivision Name)

3. WORK PERFORMED
☒ New Well ☐ Replace ☐ Recondition
☐ Deepen ☐ Abandon ☐ Other

4. PROPOSED USE
☐ Domestic ☐ Irrigation ☐ Test
☐ Municipal/Industrial ☒ Monitor ☐ Stock

5. WELL TYPE
☐ Cable ☐ Rotary ☐ RVC
☐ Air ☒ Other Auger

6. LITHOLOGIC LOG

Material	Water Strata	From	To	Thickness
Sandy gravel		0		10
Sandy Slit		10		20
Sandy Slit w-clay		20		30
Coars sand		30		40
Sany Slit	49	40		50
Slity Clay		50		60
Slity clay w-gravel		60		70
Sandy Slit		70		80
Sand		80		85

RECEIVED
06 MAR 30 AM 9:29
STATE ENGINEERS OFFICE

Date started 12-6-99, 19
Date completed 12-6-99, 19

7. WELL TEST DATA
TEST METHOD: ☐ Bailer ☐ Pump ☐ Air Lift

	G.P.M.	Draw Down (Feet Below Static)	Time (Hours)

8. WELL CONSTRUCTION
Depth Drilled 85 Feet Depth Cased 85 Feet

HOLE DIAMETER (BIT SIZE)
9" Inches From 0 Feet To 85 Feet
Inches Feet Feet
Inches Feet Feet

CASING SCHEDULE

Size O.D. (Inches)	Weight/Ft. (Pounds)	Wall Thickness (Inches)	From (Feet)	To (Feet)
2"		SC 40	0	85

Perforations:
Type perforation Factory
Size perforation 040
From ~~35~~ 35 feet to 85 feet
From feet to feet
From feet to feet
From feet to feet
From feet to feet

Surface Seal: ☒ Yes ☐ No
Depth of Seal 40
Placement Method: ☒ Pumped ☐ Poured
Seal Type: ☒ Neat Cement ☐ Cement Grout ☐ Concrete Grout

Gravel Packed: ☒ Yes ☐ No
From 35 feet to 85 feet

9. WATER LEVEL
Static water level 70 feet below land surface
Artesian flow G.P.M. P.S.I.
Water temperature Cool °F Quality

10. DRILLER'S CERTIFICATION
This well was drilled under my supervision and the report is true to the best of my knowledge.
Name West Hazmat (Contractor)
Address 3233 Fitzgark (Contractor)
Rancho Cordova Ca. 95742
Nevada contractor's license number issued by the State Contractor's Board 31386
Nevada driller's license number issued by the Division of Water Resources, the on-site driller M2079
Signed [signature] By driller performing actual drilling on site or contractor
Date

(Rev. 3-91) USE ADDITIONAL SHEETS IF NECESSARY (D)-627

log # 79974

1

~~Silty Sand~~
0-5 ~~Sandy~~ S
Silty Sand ~~gravel~~ with gravel

15- Silty Sand & Clay

25- Sandy gravel
28.1 WATER
30- Sandy Clay -
~~Silt water~~

35 ~~Clay~~ Coars Sand
40 Silty Clay with Coars Sand
45 ~~Silty Clay~~ Clay Silt SAND
50 ~~Silt~~ Sandy Silt clay
55 Silty clay sand
~~60 Silt clay sand~~
~~60~~ Silty clay SAND
~~65 Clay~~ Clay
~~70~~ Sandy Silt
70 WATER
75- Sand
80- Sand
85- Sand

49.6

Sheet 1 of

Date: 12/6/99

By DCB

Ck. By:

Job/Proj. No: 97046-57

RENO STEAD RECLAMATION

MONITORING WELLS

MW-1 (DOWN GRADIENT)

log # 79974

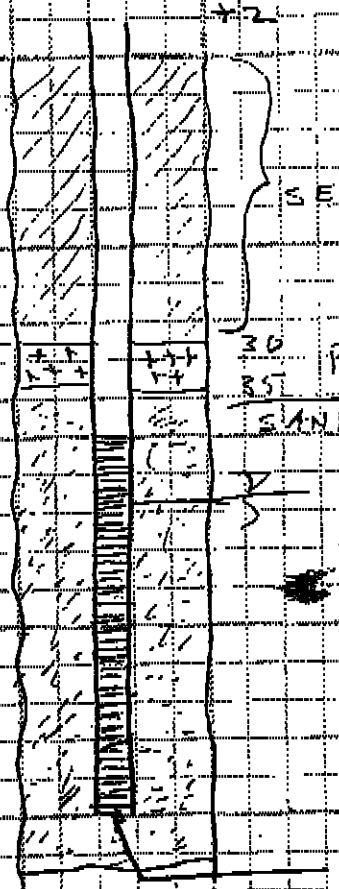

AGRA

ENGINEERING GLOBAL SOLUTIONS